





2012 Jet-Stream™ Catalog Inch/Metric

Jet-Stream™ Thru Coolant Turning, Boring & Threading Tools

U.S. & International Patents

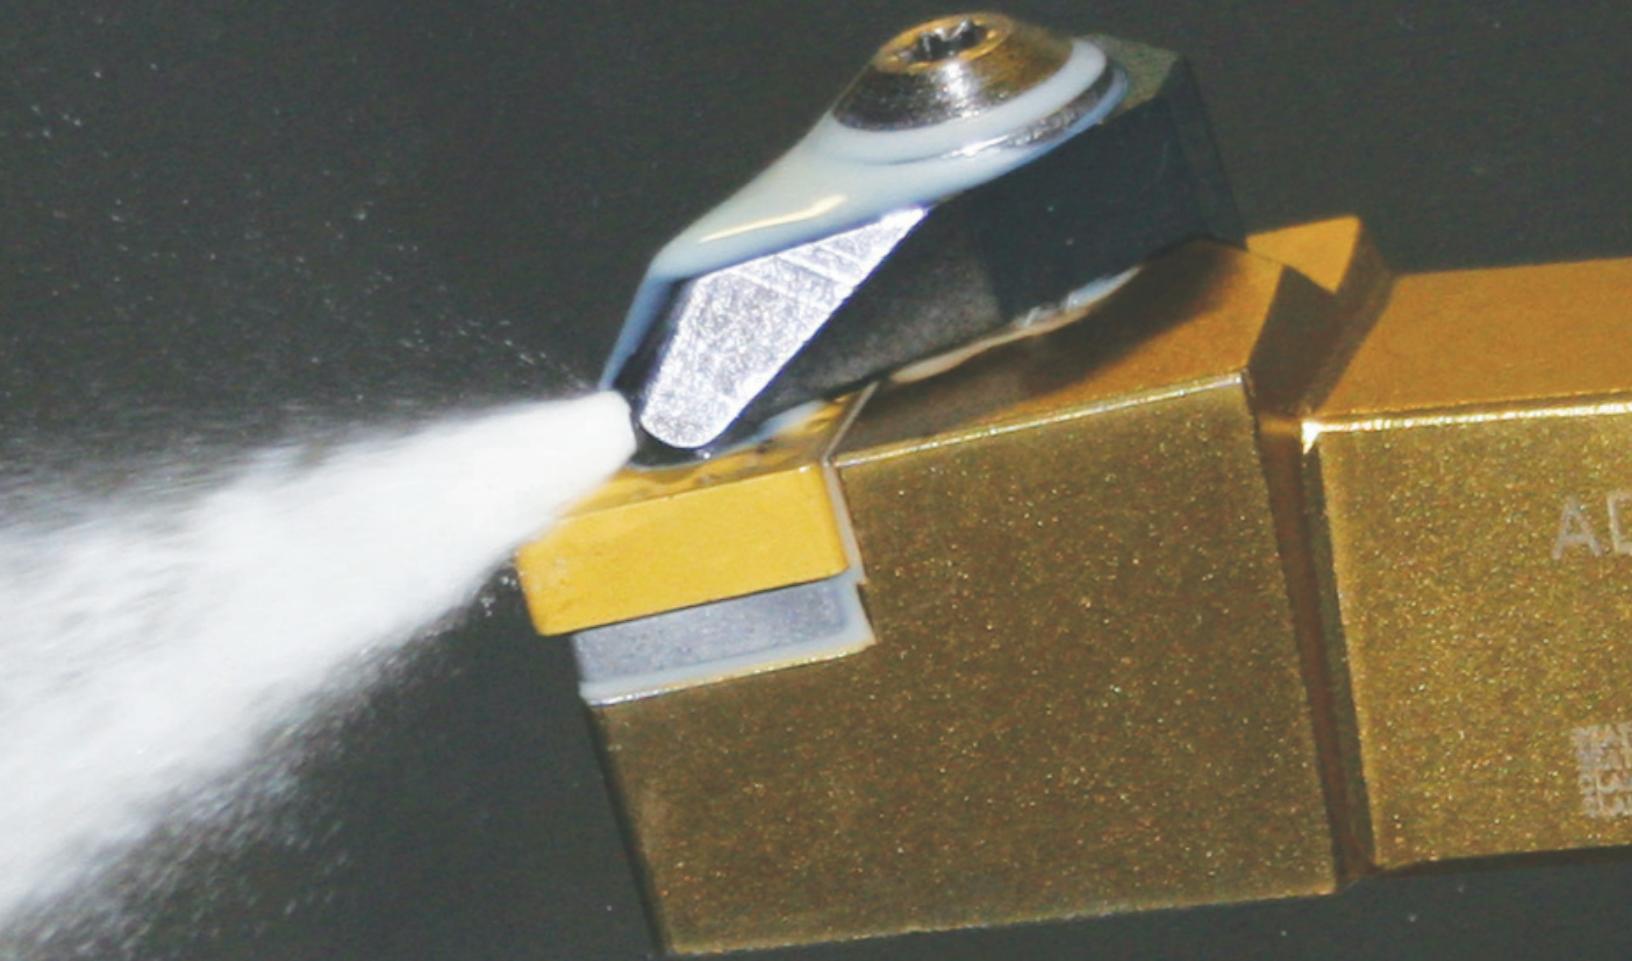

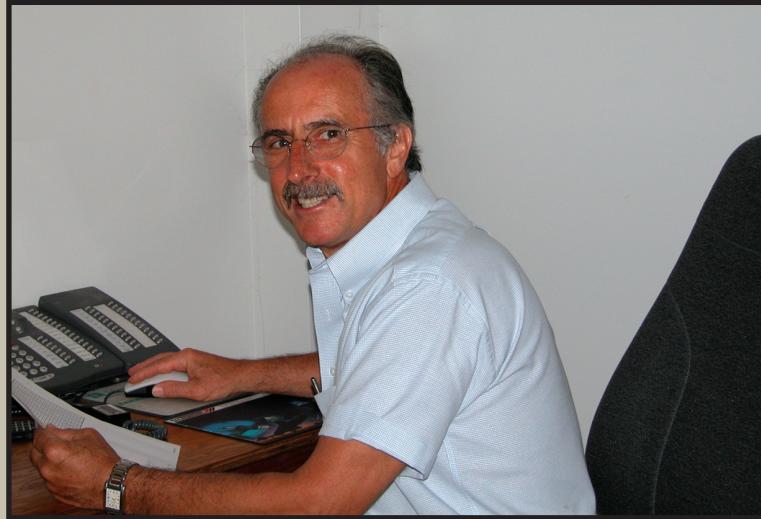

Enrico R. Giannetti
President

A Word from the President:

Since the introduction of the Quadra Index Tool Post in 1982, the Dorian Evolution has never stopped. By developing new ideas and promoting new technology, Dorian Tool has continuously improved our service, technical support, and delivery to our customers.

At Dorian Tool, the quest for innovative tools will never end. Our highly trained and skilled engineers have developed technology that set new standards in the industry and changed the machining process forever.

Today, Dorian Tool offers a wide selection of products for manual and CNC machines. From carbide inserts to toolholders; knurling tools to marking tools; machine tool accessories to automated turrets & rotary tables; tool setters to tool presetters; our tool selection has become the First Choice Technology for thousands of small and large shops around the world.

Thank you for making Dorian Tool successful. Our success comes from the original commitment we made to our customers:

Technology, Quality, & Service



Table of Contents

Jet-Stream™ Thru Coolant Turning and Boring

Jet-Stream™ Thru Coolant System Introduction		Page 2-6		
Jet-Stream™ Turning and Boring Technical Data		Page 7-10		
Jet-Stream™ Turning Toolholder Style	Insert Style	Inch Toolholder	Metric Toolholder	
ADCLNR/L	Turning Toolholder	CNMG	Page 14	Page 34
ADDJNR/L	Turning Toolholder	DNMG	Page 14	Page 34
ADDPNN	Turning Toolholder	DNMG	Page 14	Page 34
ADSDNN	Turning Toolholder	SNMG	Page 15	Page 35
ADSRNR/L	Turning Toolholder	SNMG	Page 15	Page 35
ADTENN	Turning Toolholder	TNMG	Page 15	Page 35
ADTJNR/L	Turning Toolholder	TNMG	Page 16	Page 36
ADVJNR/L	Turning Toolholder	VNMG	Page 16	Page 36
ADWLNR/L	Turning Toolholder	WNMG	Page 16	Page 36
Jet-Stream™ Boring Bar Style	Insert Style	Inch Boring Bar	Metric Boring Bar	
AS-ADCLNR/L	Boring Bar	CNMG	Page 19	Page 37
AS-ADDPNR/L	Boring Bar	DNMG	Page 20	Page 37
AS-ADDUNR/L	Boring Bar	DNMG	Page 19	Page 37
AS-ADSKNR/L	Boring Bar	SNMG	Page 20	Page 38
AS-ADTUNR/L	Boring Bar	TNMG	Page 19	Page 38
AS-ADVUNR/L	Boring Bar	VNMG	Page 20	Page 38
AS-ADWLNR/L	Boring Bar	WNMG	Page 20	Page 39

Jet-Stream™ Thru Coolant Threading, API and Grooving

Jet-Stream™ Threading, API and Grooving Technical Data		22-25		
Jet-Stream™ On Edge Threading Style	Insert Style	Inch Toolholder		
ADTVOR/L	Threading Toolholder	TNMC	Page 27	
ADTHOR/L	Threading Toolholder	TNMC	Page 27	
AS-ADTHOR/L	Threading Bar	TNMC	Page 27	
Jet-Stream™ DorNotch Threading Style	Insert Style	Inch Toolholder		
ADNSR/L	Threading Toolholder	NG-3/ NG-4	Page 29	
ADNER/L	Threading Toolholder	NG-3/ NG-4	Page 29	
ADNRR/L	Threading Toolholder	NU-3	Page 29	
AS-ADNER/L	Threading Bar	NG-3/ NG-4	Page 30	
Jet-Stream™ Laydown Threading Style	Insert Style	Inch Toolholder	Metric Toolholder	
ADLER/L	Threading Toolholder	16-G60	Page 32	Page 39
ADLEGR/L	Threading Toolholder	16-G60	Page 32	Page 39
ADLER/L	Threading Qualified Toolholder	16-G60/22-G60	Page 32	Page 40
AS-ADLNR/L	Threading Bar	16-G60/22-N60	Page 33	Page 40
ADLER/L	Threading API Toolholder	22-N60/27-Q60	Page 33	Page 40
AS-ADLNR/L	Threading API Bar	22-N60/27-Q60	Page 33	Page 41

Jet-Stream™ Thru Coolant Hardware & Inserts

Standard Coolant Connector Kit	Page 41
High Pressure Coolant Connector Kit	Page 41
Ball-Type Coolant Nozzles	Page 41
Spare Parts	Page 45
Threading Inserts	Page 44
Turning Inserts	Page 42-43
Index by Product Group	Page 46-47
Catalog Request Form	Page 48
Sales Policy	Page 49

On Target!

At The Cutting Edge



70 to 1400 psi (5 - 100 Bar)

Dorian Jet-Stream™ Thru Coolant System Will:
Improve Quality!
Improve Productivity!
Improve Insert Life!

Dorian Tool's Jet-Stream™ Thru Coolant Cutting Tools use a patented thru-coolant locking clamp which is precisely aimed to direct high pressure, high velocity coolant exactly onto the cutting edge of the carbide insert, from a short distance of $\frac{1}{4}$ ".

This controlled Jet-Stream coolant, directed onto the insert chip interface (right under the chip and over the insert cutting edge) will dissipate the generated heat very effectively as well as lubricate the cutting edge of the insert, causing the chips to hydroplane over the insert surface instead of adhering to it. As a result, the insert will operate at a constant low temperature, with a clean and undamaged cutting edge, changing the way metal is cut.

Higher speeds and feeds can be achieved, with a better surface finish, tolerance control and machining performance.
The insert life is extended up to 200%.

Jet-Stream™ Thru Coolant Turning, Boring and Threading Tools



Heat and Machining!

Heat generation in cutting tools: Anyone who is even casually involved with a machining process knows that cutting tools generate large amounts of heat. Heat is generated in three ways; by the deformation of the metal in the shear zone ahead of the cutting edge, at the point of separation when the metal is physically pulled apart and by the friction of the chip as it rubs along the surface of the tool as it is pushed out of the way. In fact, much of the horsepower drawn at the spindle motor winds up as heat which is concentrated in a very small area at the cutting edge of the tool, and in the chip itself.

Heat that is allowed to accumulate can be very detrimental to tooling, as well as to the surface of the work piece. The nice blue color in a chip means that the metal has seen very high temperatures. Most steels need to get to a temperature of at least 800° F to acquire an obvious blue oxide surface and the temperature at the tip of the cutting tool can often be over twice as hot. At these temperatures coolant is completely vaporized before it can reach the cutting zone.

Heat vs. temperature: There is no way to eliminate the heat generated at the cutting edge. The use of cutting fluids has an effect on the heat generated by friction; however, the majority of the heat is produced by the deformation of the metal itself as it is removed. The idea is not to allow the heat to accumulate in the tool to cause the temperature to rise. A brief review of heat transfer may be in order at this point. Heat is the measure of the amount of motion of the atoms in a material. All substances at a temperature higher than absolute zero contain heat. Absolute zero is the temperature at which all molecular motion ceases.


Heat is measured in British thermal units (Btu) in the English system, or calories in the metric system. A Btu is the amount of heat required to raise the temperature of a pound of water one degree on the Fahrenheit scale. Similarly, a calorie is the heat required to raise the temperature of a gram of water by 1° C. Temperature increases in other materials can be predicted by knowing the ratio of the temperature gain for a given heat input expressed as a ratio to that of water. By knowing definition of the units, it becomes obvious that, all other things being equal, an increase in the heat content of a substance causes an increase in temperature.

Heat and machining: So how does all of this relate to high pressure cooling? The fact is that it is not the heat generated by a machining process that does the damage, it's the increase in temperature. Heat that's allowed to accumulate where the tool meets the work will raise the temperature to a point where tool damage occurs. Heat remaining in the material will cause the shear plane to elongate, resulting in a thick chip that won't break or damage the structure of the work piece surface.

Heat can be removed by simply pouring the coolant over the tool as it cuts. This is referred to as 'FLOOD' cooling, and has been the standard method for years. The coolant picks up heat as it washes over the area. A problem is that, even with the best operators, the coolant line is rarely aimed at the critical point. Even with the most careful coolant application, however, at the high performance levels available with modern machine tools, so much heat is generated that the coolant is heated to beyond its boiling point. A blanket of vapor forms over the very area we're trying to cool, insulating it from the coolant. The only way heat can be drawn out of the area is by radiating it through the vapor blanket, and by conduction back through the tool. Either way, only a fraction of the heat-carrying capacity of the coolant is being used.

High pressure cooling in conjunction with the **Dorian High Volume Jet-Stream™ System**, allows the coolant to be introduced in such a way as to remove the heat at a high enough rate and pressure to eliminate the vapor barrier. This allows a direct heat transfer from the mass of the insert to the mass of the coolant. The temperature of the tool, in some cases, is only slightly above the temperature of the coolant.

Dorian Jet-Stream™ Tooling uses a patented coolant through locking clamp which is precisely aimed to insert high pressure, high velocity coolant into exactly the spot where the heat is generated.

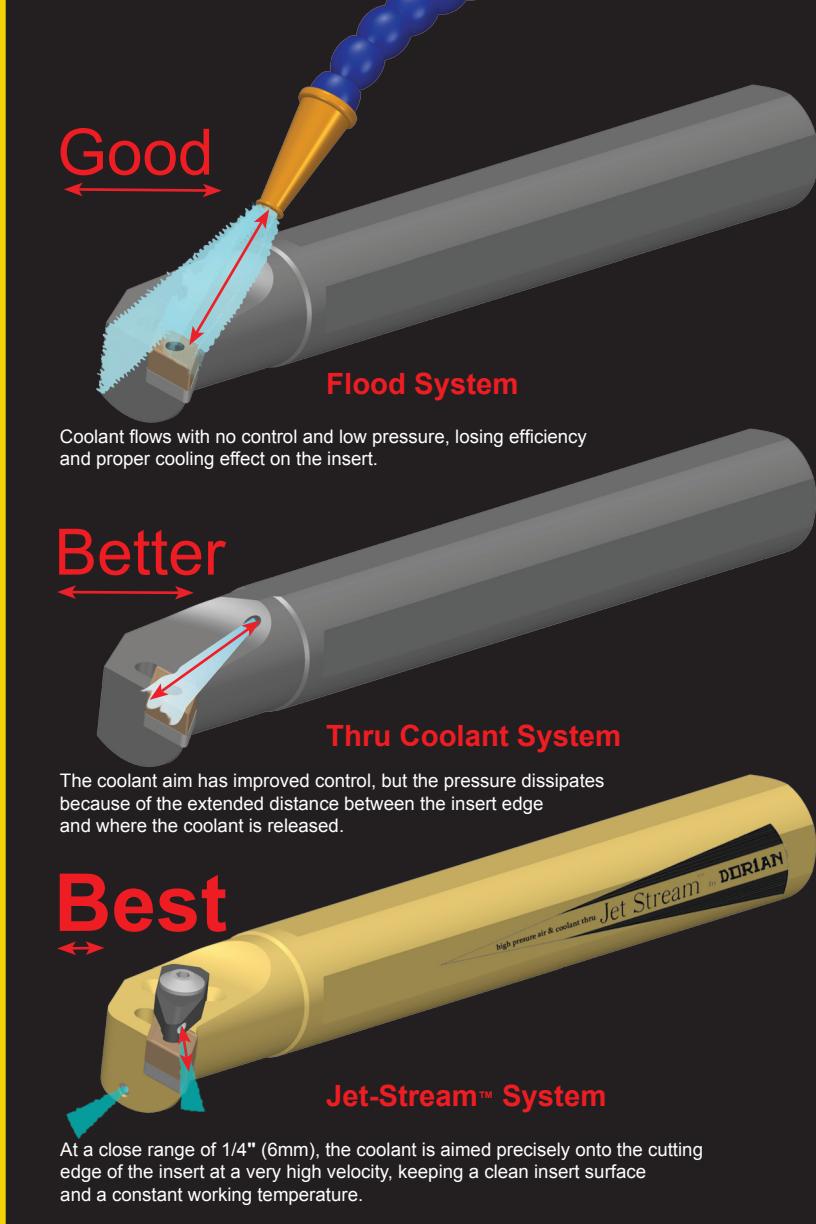


With standard turning tools the coolant doesn't even hit the part. The operator aims the coolant by hand at the tool using snap together plastic beads or copper tubing. Every operator does it differently, and during operation the coolant lines are frequently pushed out of alignment so that the operator has to manually readjust the aim of the coolant, often every time they change a part. One coolant manufacturer estimates that 40% of the time the coolant doesn't hit the tool or the part. Even when the coolant hits the tool there is no directional control; it can typically come from any direction within a 180-degree arc in one axis and a 90-degree arc in the other axis. Real process control from setup to setup and throughout a production run is virtually nonexistent.

Coolant alignment machined into the Jet-Stream™ Tool Holder: Dorian has introduced a patented through coolant clamping system as part of the holder, insuring that the coolant always hits the insert at exactly the right spot, putting the force where you need it. The process is repeatable from setup to setup and throughout a production run.

The coolant that is aimed at the tool doesn't get to the tip of the tool. The essence of the problem with standard low pressure coolant systems is that so much heat is produced that the coolant boils away before it can reach the chip/tool interface where metal is actually cut. The super heated steam forms a barrier that low pressure coolant can't penetrate. Effective cooling does not occur and there is little real lubrication provided. Unfortunately, the vapor barrier that forms is not powerful enough to keep chips from falling back into the chip/tool interface and causing damage.

Standard
Thru Coolant Dor-Lock™ Clamp Style JSCL-HP
Operates at a Maximum of 1400 psi (100 Bar)

Supplied with all Jet-Stream™ Tools

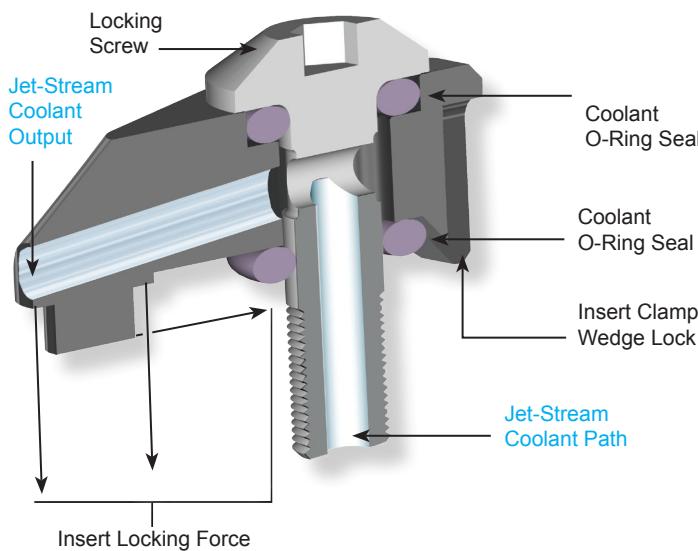


- Locks and cools the insert in one action
- Aimes the coolant to the cutting edge
- Aimes the coolant underneath the chip

World Wide Patents & Patents Pending

High Volume
Thru Coolant Dor-Lock™ Clamp Style JSCL-HPV
Operates at a Maximum of 1400 psi (100 Bar)

Sold Separately to Deliver High Coolant Volume
 for Applications above 1000 psi

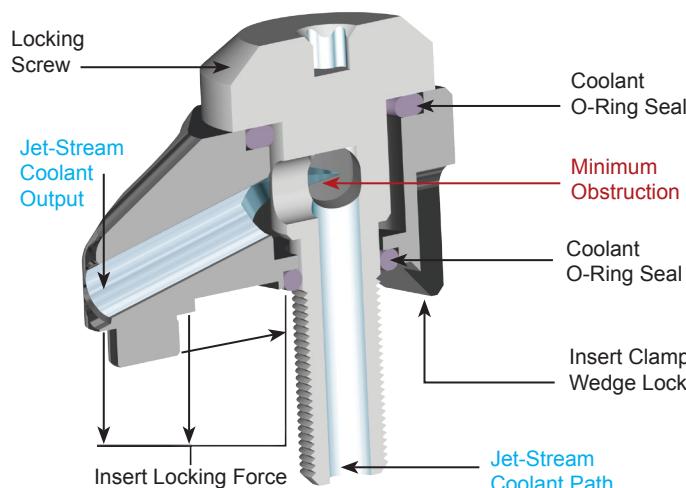

Maximum performance will be achieved
 at 1000 psi and above with a coolant volume of $\frac{1}{2}$ gpm (gallon per minute) per machine horsepower.

World Wide Patents & Patents Pending

Performance is Improved With

- Extreme Lubrication at the cutting edge
- Extreme Heat Dissipation at the cutting edge
- Constant Low Cutting Edge Temperature
- Greater Chip Control and Evacuation
- Chip Breaking at High Pressures
- Smooth Cutting Action and Surface Finish
- Increased Speeds and Feeds

Why The Dorian Jet-Stream™?

The advanced and unique technology of the Jet-Stream™ Thru Coolant System, offers the ability to process the coolant supplied from the machine's pump with maximum efficiency, speed and volume. The speed and volume of the coolant coming out of the Jet-Stream nozzle directly onto the insert cutting edge will improve machining performance.

Anyone who is even casually involved with metalworking knows that cutting tools generate large amounts of heat, which is detrimental to the usable life of carbide inserts.

To overcome this problem with standard turning tools, the operator aims the coolant by hand at the tool using snap together plastic beads or copper tubing. Every operator does it differently, and during machining operation the coolant lines are frequently pushed out of alignment so that the operator has to manually readjust the aim of the coolant, often every time they change a part. One coolant manufacturer estimates that 40% of the time the coolant doesn't hit the tool or the part. Even when the coolant hits the tool there is no directional control; it typically comes from the top and hits the chips before it can reach the insert's cutting edge where heat is accumulating. Real process control from setup to setup and throughout a production run is virtually nonexistent.

Improved Productivity (70 psi):

The Jet-Stream™ Thru Coolant System will immediately improve machine performance with higher sfm (surface footage), extended tool life, ability to hold closer tolerances, and improvement of surface finish. The Jet-Stream™ tooling will excel because it makes machining simple and easy for materials ranging from low carbon steel to high temper alloys, exotics and aerospace materials.

How to Optimize Productivity (1000 psi)

A minimum of 70 psi / 5 Bar is required for the Jet-Stream™ to show improvements in machining performance. To reach optimum results, higher coolant pressure and volume are necessary. Maximum performance will be achieved at 1000 psi and above with a coolant volume of $\frac{1}{2}$ gpm (gallon per minute) per machine horsepower. Example: A 15 HP machine will need a coolant pump of 1000 psi with 7.5 gpm of coolant volume.

How To Guarantee Results

- DO NOT exceed the insert machining data.
- DO NOT take too deep of a cut without the proper coolant pressure and volume.
- If the chips are not breaking your machining data or insert are incorrect.
- Make sure you have a large enough coolant pump on the machine to supply sufficient coolant volume when high and super high pressure is required.

The Jet-Stream™ High force coolant breaks chips and keeps them away from the tool.

High force coolant (pressure and volume) prevents

Vapor Barrier: Properly applied high pressure and high volume coolant prevents this vapor barrier from forming by removing the energy created in the turning process and creating a region of high pressure which raises the boiling point of the coolant. So much liquid is forced into the cutting zone that heat is removed and no vapor can form because of the pressurization. A great deal of **FORCE** is required to achieve this pressurization. This liquid has the added benefit of providing lubrication and flushes chips away from the cut. There is a great deal of discussion about pressure, pressure is meaningless without volume.

Force requires both mass and velocity, and the coolant must, of course, be focused at the chip tool interface.

It doesn't matter how big a gun you have if you miss the target.




When you combine the Dorian Jet-Stream™

tools with a high pressure pump you gain real control of your process, damage from heat and chips is eliminated and tools can cut until they wear out. Controlled high-pressure coolant keeps the temperature low; changing the way metal is cut. Tools last longer, chips can't weld to the insert and metal can be cut at much higher surface speeds than ever before. Dangerous decomposition of the chemicals mixed in coolants do not occur at low temperatures. Combining a properly designed high pressure and high volume pumping system and the Dorian Jet Stream tooling system allows surface speed to be increased a minimum of 30%, with some operations improving by 300%. High-pressure coolant also provides lubricity by blasting lubricating fluid between the chip and the insert at hundreds of miles per hour. This increased lubricity combined with much lower temperature and the ejection of cut material often causes surface finishes to have a RMA twice as good as can be achieved by traditional methods.

Chip damage from long stringy chips:

Chips cause unpredictable damage. In general, the longer the chips, the harder it is to control and the more damage they cause. Long stringy chips wrap around boring bars, fill the bottoms of holes, catch on the chucks, cause mechanical problems with loaders, and in many cases require manual removal. All of these slow down the production process and eat away at your profitability. Broken chips that can fall away, or that can be blown out of the cutting zone with coolant force and away from the part and tool are always more desirable. Many people don't understand the difference between wear and damage. Wear is a predictable part of any mechanical process. Damage, on the other hand, is random, producing the same bell shaped curve that any random event with enough samples must produce. When inserts wear out you can control your production process, when they fail you can not.


Short chips with high pressure

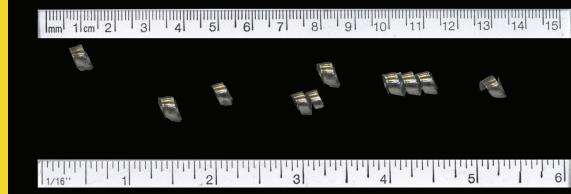

High Pressure

High Pressure and volume directed into the chip-tool interface never lets the temperature get out of control. The shear zone is short and the chips break over the base material. The part itself is acting as a chip breaker.

Long chips made with low pressure

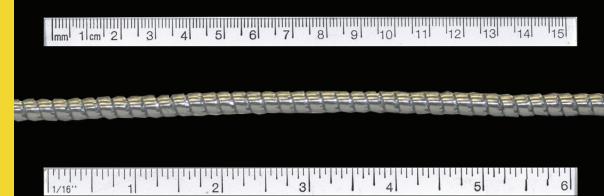


Standard Pressure


Low-pressure coolant allows a long shear zone that does not break chips in many materials. The result is long uncontrollable chips.

**The Jet-Stream™ Pressure****Forces the Hot Chips to Hydroplane**

away from the cutting edge of the insert, keeping a clean insert surface and a constant working temperature.

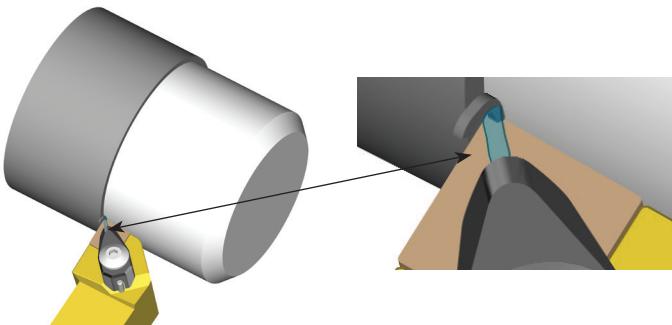Turning Application**Blind Boring Application**



Helps prevent damage to the insert, the tool itself and even the part that is being cut.

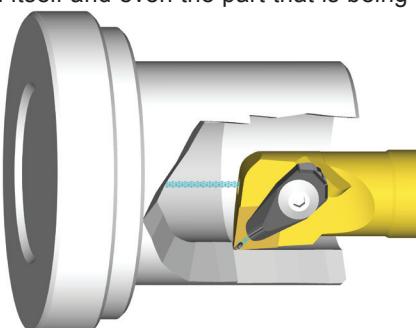**The Dorian Jet-Stream™ Coolant System****Controls Volume and Pressure:**

From the apex of the locking Clamp, the coolant Jet-stream is aimed at a close range of 1/4" (6mm), precisely onto the cutting edge of the insert at a very high velocity.

The controlled jet-stream coolant will lubricate the cutting edge of the insert reducing the coefficient of friction, stopping the chips from adhering to the insert. The physical combination of high velocity and high pressure, forces the **hot chips** to **hydroplane** away from the cutting edge of the insert.

As a result, the insert will operate at a constant low temperature, with a clean and undamaged cutting edge, changing the way metal is cut. Higher surface speeds and deeper cuts can be achieved, with a better surface finish, close working tolerance and higher machine performance.

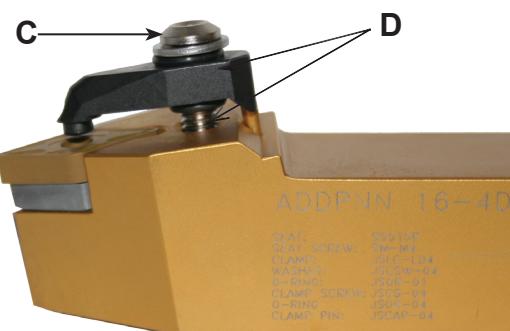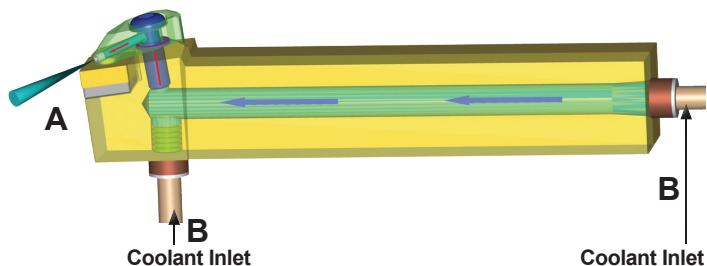The New Patented Jet-Stream™ System will**Increase Machining Performance and Insert Life Up to 200%****The Dorian Jet-Stream™ Coolant System Features:**

- Coolant shoots directly over the cutting edge of the insert.
- Double coolant Inlet simplifies the coolant connection to the machine.
- Lock and release the insert quickly and powerfully with the new patented Dor-Lock clamping system.
- Patented thru coolant and locking clamp in one system

The patented Jet-Stream™ system:

Is designed for use in all turning, boring and threading applications from heavy roughing to high-speed finishing and threading.

Delivers: • Longer Insert Life • Better Surface Finish • Higher Speeds and Feeds

The patented Dor-Lock™ clamping system:

Locks the insert securely down and aims the coolant flow precisely over the cutting edge of the insert

All Jet-Stream™ toolholders and boring bars use industry standard inserts and are available in multiple geometries.



In Blind Boring Applications:

The advanced design of the Jet-Stream™ Boring Bar offers the ability to use the front coolant port to flush chips out of the way so that they do not get packed or re-cut, by simply installing the supplied coolant nozzle screw. This will help prevent damage to the insert, the tool itself and even the part that is being cut. If this is not necessary in an application just replace the coolant screw with the already supplied solid screw and this will disable the front coolant port and use only the coolant port at the tip of the insert.

Materials and Quality


The body's of the Jet-Stream™ Toolholders and Boring Bars are built with chromuim-molybdenum alloy steel. This material features properties of high tensile strength and high yield stress. This material is heat treated to 40-44Rc and Electroless Nickel Coated.

Electoless Nickel Coating will prevent the tools against rust providing a long tool life under severe working conditions.


Boring Bars



Turning Toolholders

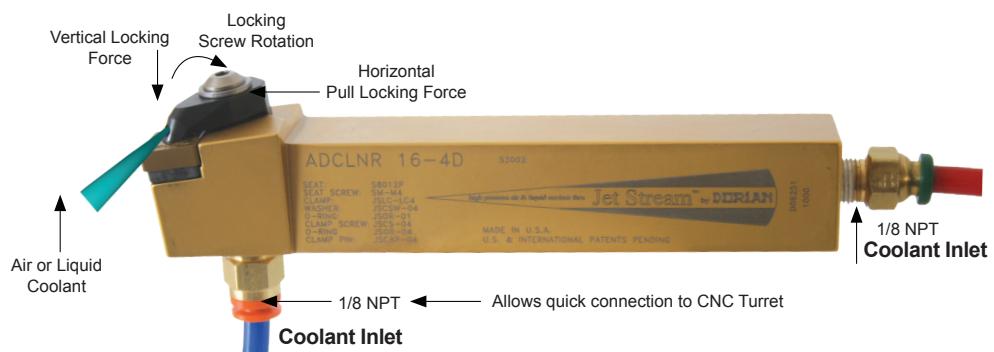

Standard Spare Parts

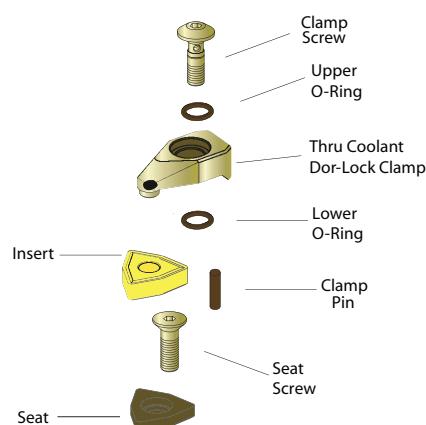



Guidelines for Utilizing The Boring Bar for Internal Work

- When choosing a boring bar, always try to select the largest shank diameter that the application will allow.
- As a rule of thumb, never allow a boring bar to extend more than four times its diameter from the end of its clamping surface.
- Using boring bars with coolant through the shank can greatly enhance the removal of chips and improve surface finish on deep bores or blind holes.
- Be sure to use a stable, properly sized clamping method to secure a boring bar. Use the following information as a guide:


Clamping Length: 3-4 x bar diameter

Hole Tolerance: H8

Surface Finish: 32 μ in R_a

Hardness: 45 HRC minimum

Boring Bar Clamping Selection			
Best Collar Lock System	Better Screw Lock System	Good	Not Recommended
Integral bar or flange mounting. Most rigid, but not adjustable.	Split block holder. Provides maximum surface area for clamping.	Cylindrical holder with screws. Provides quick centerline reference.	V-groove with screws. See cylindrical holder with screws.

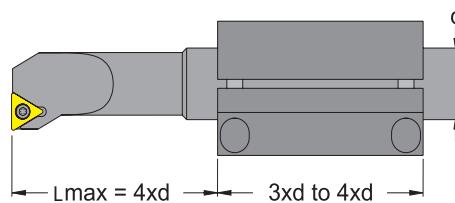

Note: This rule is for steel boring bars only. Carbide boring bars are effective with an overhang of up to seven times the bar diameter.

Minimizing Vibration		
Less Vibration	Insert Radius	Cutting Rake
	Use a smaller radius to limit vibration.	Use as positive cutting rake to limit vibration.
		Neutral

Feeds and Speeds (Inch and Metric)

Inch Formulas for Turning and Boring		
ap = Depth of cut (DOC)	Inch	k_c = Specific cutting force Lb/inch ²
Dm = Diameter of part (DIA)	Inch	n = Spindle speed (RPM) Rev/Min
f_n = Feed per revolution (FEED)	Inch/Rev	v_c = Cutting speed (SFM) Feet/Min
l_m = Machined length (LEN)	Inch	T_c = Cutting time (TIM) Min
Q = Metal removal rate (MMR)	Inch ³ / Min	R_{max} = Profile depth μ in
P_c = Power requirements (POW)	Hp	r_e = Insert nose radius Inch
Cutting Speed Surface Feet Per Minute:	EX: Determine the cutting speed (v_c) required for turning a 2-1/2" diameter part with a spindle speed of 600 RPM.	
$v_c = \frac{\pi \times Dm \times n}{12}$	$v_c = \frac{\pi \times 2.5 \times 600}{12} = 392.70$ Feet/Min	
Spindle Speed Revolution Per Minute:	EX: Determine the spindle speed (n) required for turning a 2-1/2" diameter part with a cutting speed of 400 SFM.	
$n = \frac{V_c \times 12}{\pi \times Dm}$	$n = \frac{400 \times 12}{\pi \times 2.5} = 611.15$ Rev/Min	
Metal Removal Rate Inch ³ /Min:	EX: Determine the metal removal rate (Q) required for cutting with a depth of .062 with a cutting speed of 400 SFM and feed rate of .015 IPR.	
$Q = v_c \times ap \times f_n \times 12$	$Q = 400 \times .062 \times .015 \times 12 = 4.464$ inch ³ /min	
Power Requirement Horsepower:	EX: Determine the power requirement (P_c) for turning a material with a cutting force of 181,750, a depth of .062, a cutting speed of 400 SFM, and feed rate of .015 IPR.	
$P_c = \frac{v_c \times ap \times f_n \times k_c}{33,000}$	$P_c = \frac{400 \times .062 \times .015 \times 181,750}{33,000} = 2.05$ HP	
Cutting Time Minute:	EX: Determine the amount of time required to machine a 6" long part with a spindle speed of 600 RPM and feed rate of .015 IPR.	
$T_c = \frac{l_m}{f_n \times n}$	$T_c = \frac{6}{.015 \times 600} = .67$ Min (40 Sec)	
Profile Depth (μ in)		
$R_{max} = f_n^2 \times 10^6$		
$8r_e$		

Metric Formulas for Turning and Boring		
ap = Depth of cut (DOC)	mm	k_c = Specific cutting force Nm
Dm = Diameter of part (DIA)	mm	n = Spindle speed (RPM) Rev/Min
f_n = Feed per revolution (FEED)	mm/Rev	v_c = Cutting speed (SFM) mm/Min
l_m = Machined length (LEN)	mm	T_c = Cutting time (TIM) Min
Q = Metal removal rate (MMR)	mm ³ / Min	R_{max} = Profile depth μ m
P_c = Power requirements (POW)	kW	r_e = Insert nose radius mm
Cutting Speed Surface Meters Per Minute:	EX: Determine the cutting speed (v_c) required for turning a 50mm diameter part with a spindle speed of 600 RPM.	
$v_c = \frac{\pi \times Dm \times n}{1000}$	$v_c = \frac{\pi \times 50 \times 600}{1000} = 94,25$ m/Min	
Spindle Speed Revolution Per Minute	EX: Determine the spindle speed (n) required for turning a 32mm diameter part with a cutting speed of 100 m/Min.	
$n = \frac{V_c \times 1000}{\pi \times Dm}$	$n = \frac{100 \times 1000}{\pi \times 32} = 994,72$ Rev/Min	
Metal Removal Rate mm ³ /Min	EX: Determine the metal removal rate (Q) required for cutting with a depth of 1,5 with a cutting speed of 200 m/Min and feed rate of 0,4 mmPR.	
$Q = v_c \times ap \times f_n \times 1000$	$Q = 200 \times 1,5 \times 0,4 \times 1000 = 120.000$ mm ³ /min	
Power Requirement Kilowatts	EX: Determine the power requirement (P_c) for turning a material with a specific cutting force of 20,500, a depth of 1,5, a cutting speed of 200 m/Min, and feed rate of 0,4 mmPR.	
$P_c = \frac{v_c \times ap \times f_n \times k_c}{1,460,000}$	$P_c = \frac{200 \times 1,5 \times 0,4 \times 20,500}{1,460,000} = 1,68$ kW	
Cutting Time Minute	EX: Determine the amount of time required to machine a 200mm long part with a spindle speed of 600 RPM and feed rate of 0,4 mmPR.	
$T_c = \frac{l_m}{f_n \times n}$	$T_c = \frac{200}{0,4 \times 600} = ,83$ Min (50 Sec)	
Profile Depth (μ m)		
$R_{max} = f_n^2 \times 10^6$		
$8r_e$		

Turning and Boring Insert Application						
VNM_	DNM_	TNM_	WNM_	CNM_	SNM_	RNM_
Finishing		Multi-Application			Roughing	
Minimum	←	Cutting Edge Strength	→	Maximum		
Weaker	←	Insert Attitude	→	Stronger		
Finishing	←	Turning Application	→	Roughing		
Multi	←	Turning Operation	→	Single		
Smooth	←	Surface Finishing	→	Vibration		
Low	←	Cutting Force	→	High		
High	←	Revolution Per Minute	→	Low		
Low	←	Feed Per Minute	→	High		

- For roughing, round or square inserts are the best choice because of their superior strength due to large insert angles.

- For finishing, the smaller insert angles of the 55° diamond and 35° diamond inserts are the best choice. These inserts allow for a finer finish.

- For multi-purpose work such as turning, facing, chamfering, profiling, or light roughing, the 80° diamond, 80° trigon, or triangle are the best choices. Though these inserts combine some of the best features of both the roughing and finishing inserts, they should not be The First Choice for either heavy roughing or extreme finishing.

Turning and Boring Insert Geometry Selection						
	Insert	Application	O.D. Turning	I.D. Turning	Max. Depth of Cut	
Strength ↑ ↓ Speed	Round 	<ul style="list-style-type: none"> Heavy Duty Roughing Facing Turning 		N/A	 $I_a = 0.400 \times d$	
	Square 	<ul style="list-style-type: none"> Heavy Duty Roughing Facing Turning Chamfering I.D. Turning 		 $I_a = 0.667 \times l$		
	80° Diamond 	<ul style="list-style-type: none"> Roughing Finishing Turning Facing Chamfering I.D. Turning 		 $I_a = 0.667 \times l$		
	80° Trigon 	<ul style="list-style-type: none"> Roughing Finishing Turning Facing I.D. Turning 		 $I_a = 0.250 \times l$		
	Triangle 	<ul style="list-style-type: none"> Light Roughing Finishing Turning Facing Chamfering I.D. Turning 		 $I_a = 0.500 \times l$		
	55° Diamond 	<ul style="list-style-type: none"> Light Roughing Finishing Turning O.D. Profiling I.D. Profiling 		 $I_a = 0.500 \times l$		
	35° Diamond 	<ul style="list-style-type: none"> Light Roughing Finishing O.D. Profiling I.D. Profiling 		 $I_a = 0.125 \times l$		



At Dorian Tool we are constantly searching for methods to improve our tools and reduce insert failure. The type of wear suggests the problem, and is directly related to how a tool or procedure may be changed to improve tool life and cutting performance.

The constant cooling temperature of the new Jet-Stream™ Thru coolant Boring Bars and Toolholders will increase your machining performance and insert life by 200 Percent, minimizing crater, edge build-up, thermal cracking and heat deformation.

Listed below are the types of insert failure modes we have carefully studied along with the cause and solution.

Type of Failure	Cause	Solution
Edge Wear	<ul style="list-style-type: none"> • Cutting speed too high • Insufficient wear resistance 	<ul style="list-style-type: none"> • Increase feed • Reduce speed • Use insert with a more wear resistance grade • Apply coolant at a constant rate
Thermal Cracking	<ul style="list-style-type: none"> • Intermittent machining • Varying coolant supply 	<ul style="list-style-type: none"> • Reduce speed and feed • Apply coolant at a constant rate
Chipping	<ul style="list-style-type: none"> • Excessive load • Cutting speed too high • Insufficient wear resistance 	<ul style="list-style-type: none"> • Change edge preparation • Check rigidity of the insert • Reduce speed • Use insert with a more wear resistance grade • Apply coolant at a constant rate
Built-up Edge	<ul style="list-style-type: none"> • Cutting temperature too low • Low cutting speed • Negative cutting geometry 	<ul style="list-style-type: none"> • Increase feed • Increase speed • Apply coolant at a constant rate
Depth of Cut Notching	<ul style="list-style-type: none"> • Excessive load • Cutting speed too high • Insufficient wear resistance 	<ul style="list-style-type: none"> • Change lead angle • Use different grade • Adjust feed rate • Apply coolant at a constant rate
Heat Deformation	<ul style="list-style-type: none"> • Cutting temperature too high • Pressure too high 	<ul style="list-style-type: none"> • Reduce speed and feed • Apply coolant at a constant rate • Reduce depth of cut
Crater	<ul style="list-style-type: none"> • Cutting temperatures on the insert rake face too high 	<ul style="list-style-type: none"> • Reduce speed and feed • Apply coolant at a constant rate
Insert Breakage	<ul style="list-style-type: none"> • Grade too brittle • Excessive load • Weak insert geometry • Insert too small 	<ul style="list-style-type: none"> • Reduce depth of cut • Reduce speed and feed • Apply coolant at a constant rate • Check rigidity of the insert • Use stronger insert geometry






70 - 1400 psi (5 -100 Bar)



For Inch Tools see Pages 12-16

For Metric Tools see Pages 34-36



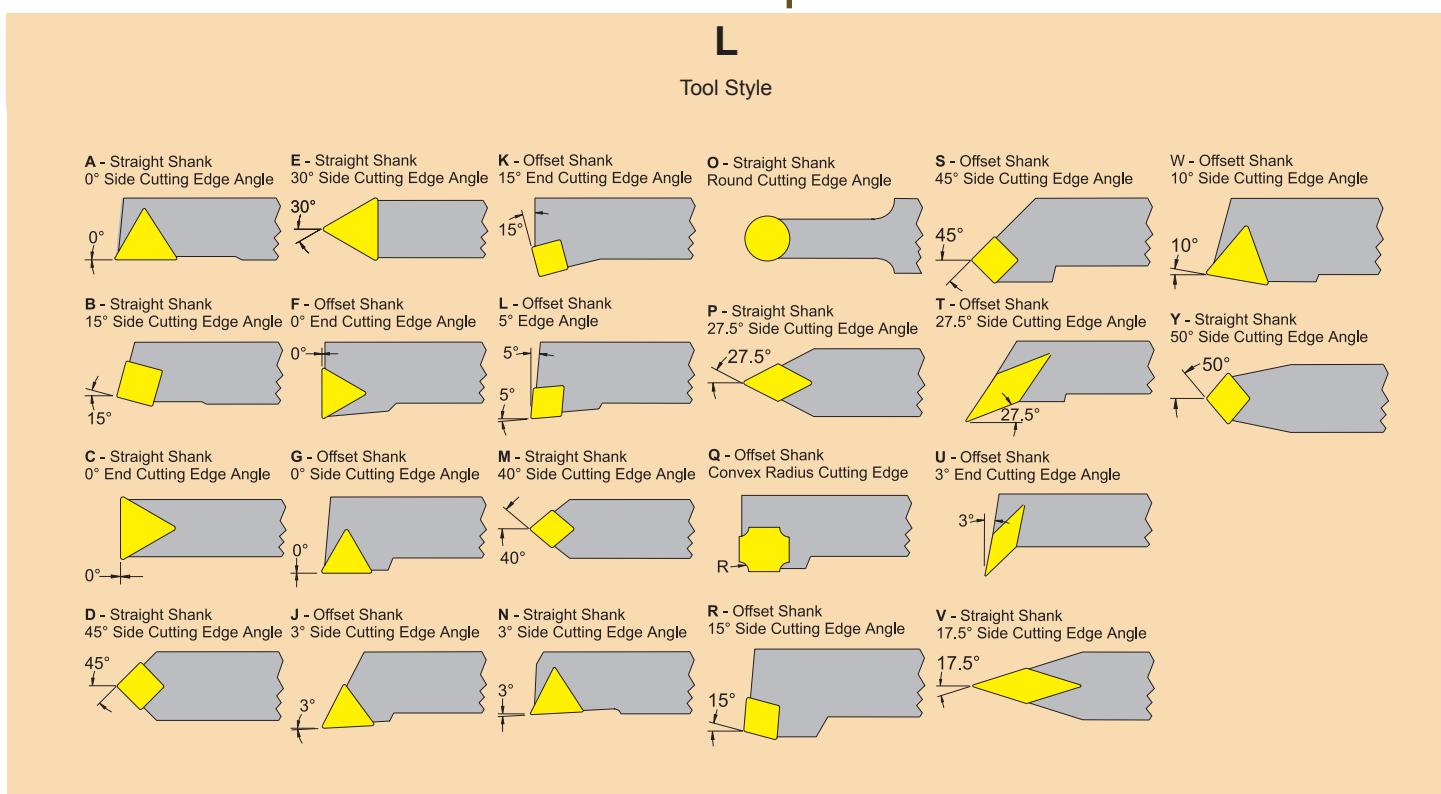
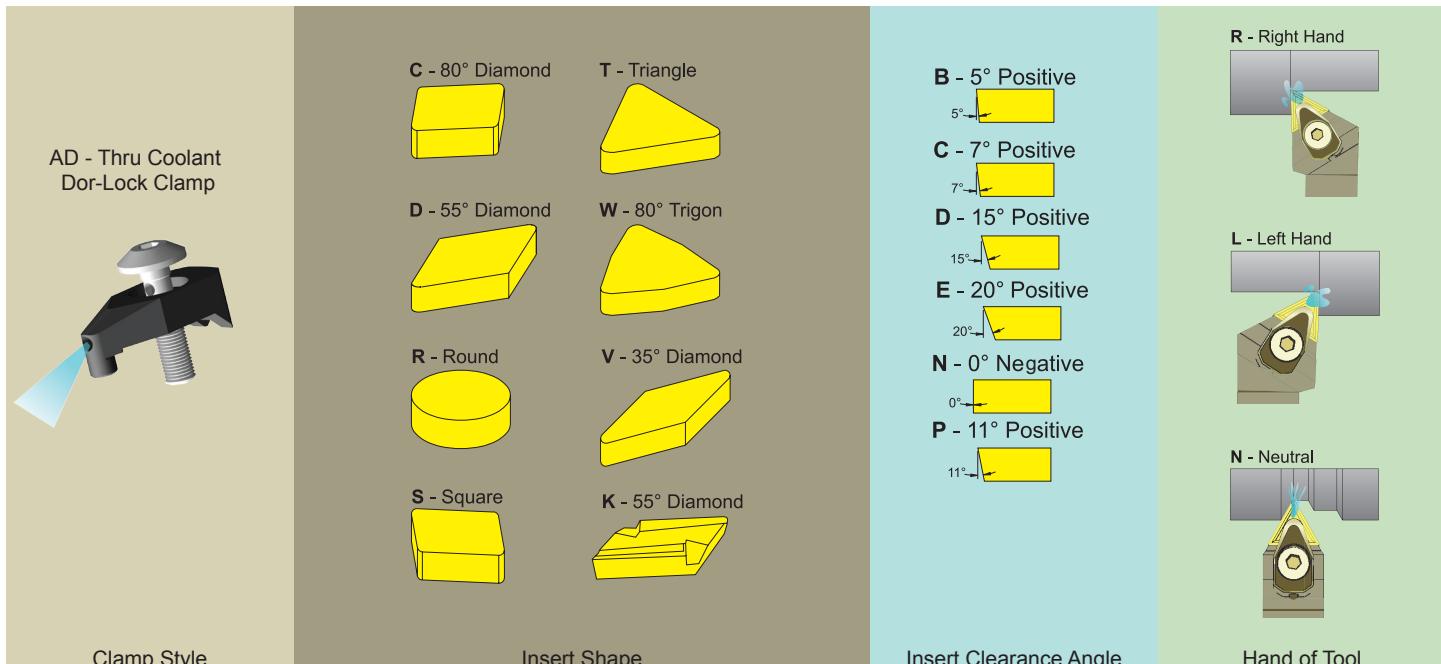


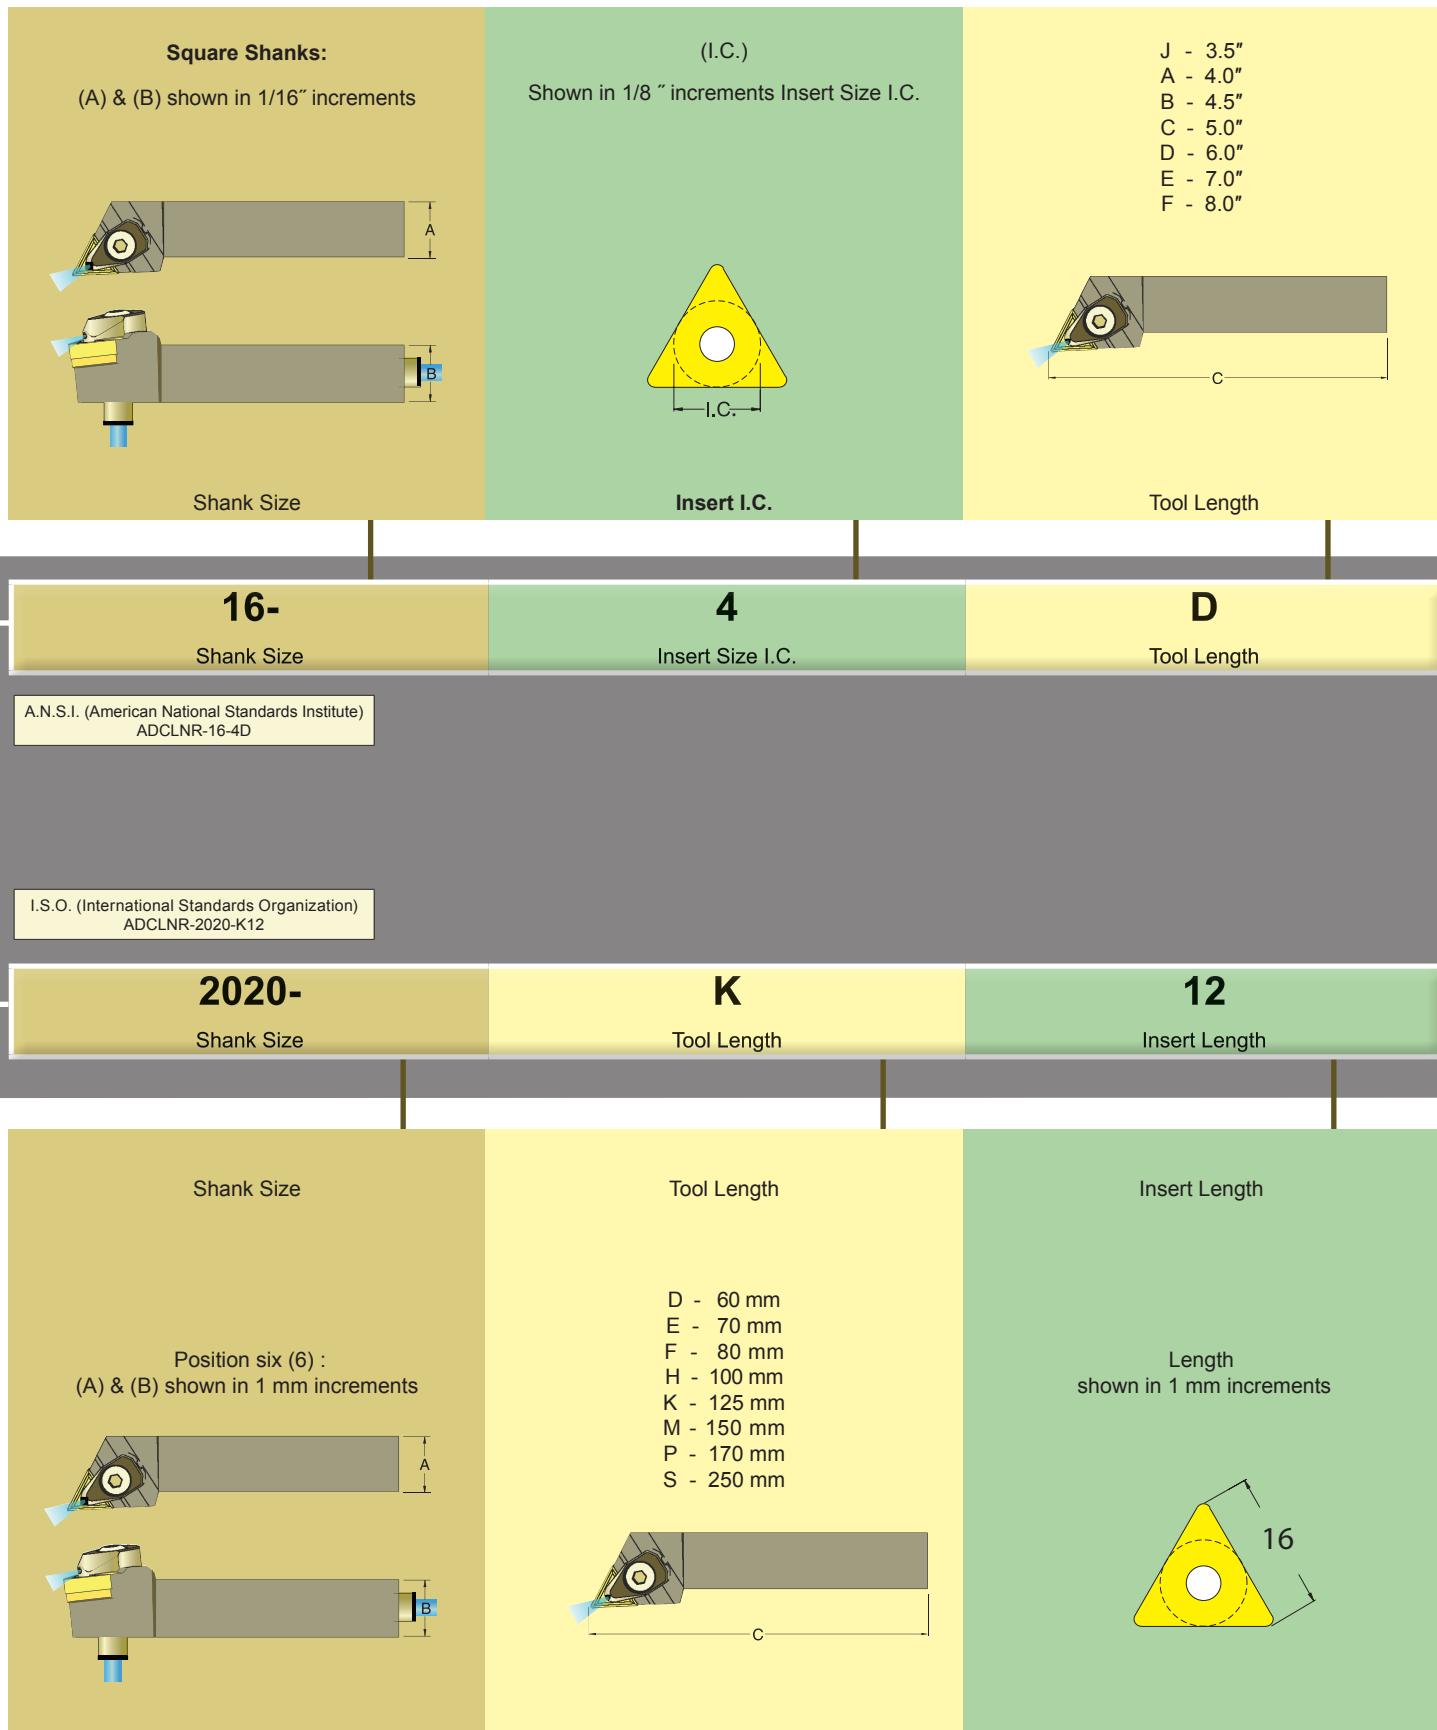

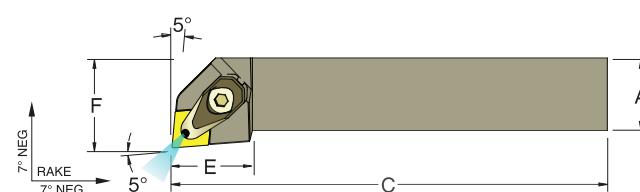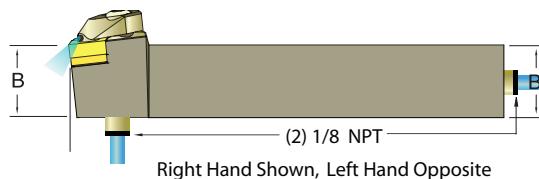**ADCLN R/L Toolholder Style L - 5° end or side cutting lead angle for negative 80° diamond CNM_inserts**



Inch Description	Part No. 733101-		A	B	C	E	F	CNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADCLNR/L-12-4B	53000	53001	0.75	0.75	4.50	1.250	1.000	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-16-4D	53002	53003	1.00	1.00	6.00	1.250	1.250	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-20-4D	53004	53005	1.25	1.25	6.00	1.250	1.500	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-20-5D	53006	53007	1.25	1.25	6.00	1.375	2.000	543	ICSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-20-6E	53012	53013	1.25	1.25	700	1.500	1.500	643	ICSN-633	SM-M66	JSLC-HPC6	JSCS-06	JSOR-07	JSOR-07
*ADCLNR/L-24-4E	53008	53009	1.50	1.50	7.00	1.250	2.000	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
*ADCLNR/L-24-5E	53010	53011	1.50	1.50	7.00	1.375	2.000	543	ICSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADCLNR/L-24-6E	53014	53015	1.50	1.50	7.00	1.500	2.000	643	ICSN-633	SM-M66	JSLC-HPC6	JSCS-06	JSOR-07	JSOR-07

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

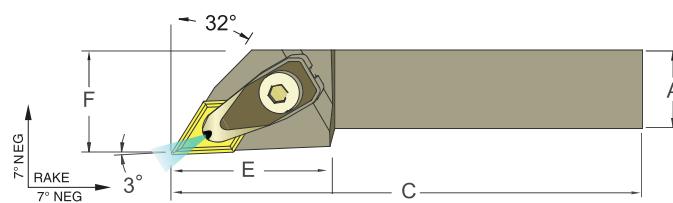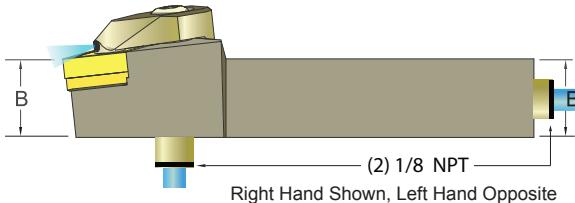ADDJN R/L Toolholder Style J - 3° side cutting lead angle for negative 55° diamond DNM_inserts


Inch Description	Part No. 733101-		A	B	C	E	F	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADDJNR/L-12-3B	53016	53017	0.75	0.75	4.50	1.500	1.000	332	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-12-4B	53018	53019	0.75	0.75	4.50	1.500	1.000	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-16-4D	53020	53021	1.00	1.00	6.00	1.500	1.250	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-20-4D	53022	53023	1.25	1.25	6.00	1.500	1.500	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
*ADDJNR/L-24-4E	53024	53025	1.50	1.50	7.00	1.500	2.000	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

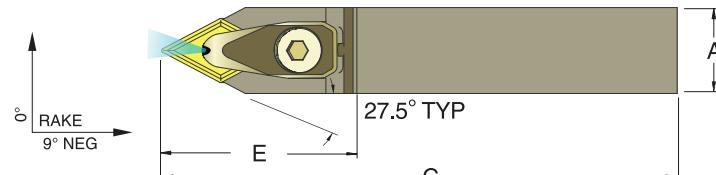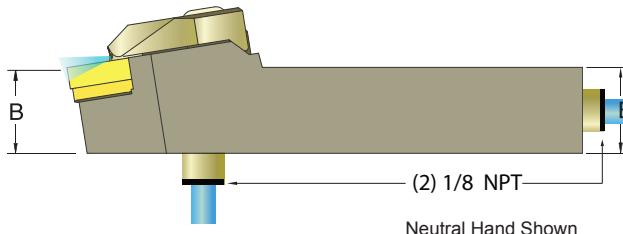ADDPNN Toolholder Style P - 27.5° side cutting lead angle for negative 55° diamond DNM_inserts


Inch Description	Part No. 733101-		A	B	C	E	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	Neutral												
ADDPNN-12-3B	53030		0.75	0.75	4.50	1.750	332	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDPNN-12-4B	53031		0.75	0.75	4.50	1.750	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDPNN-16-3D	53032		1.00	1.00	6.00	1.750	332	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDPNN-16-4D	53033		1.00	1.00	6.00	1.750	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDPNN-20-4D	53034		1.25	1.25	6.00	1.750	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
*ADDPNN-24-4E	53035		1.50	1.50	7.00	1.750	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

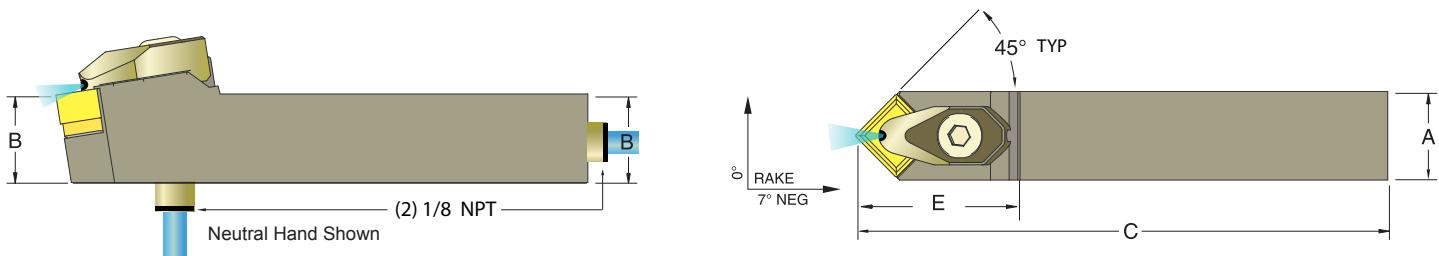**ADSDNN Toolholder Style D - 45° side cutting lead angle for negative square SNM_inserts**


Inch Description	Part No. 733101-	A	B	C	E	SNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	Neutral											
ADSDNN-12-4B	53053	0.75	0.75	4.50	1.375	432	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSDNN-16-4D	53054	1.00	1.00	6.00	1.375	432	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSDNN-20-4D	53055	1.25	1.25	6.00	1.375	432	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSDNN-20-5D	53056	1.25	1.25	6.00	1.375	543	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADSDNN-24-5E	53058	1.50	1.50	7.00	1.625	543	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

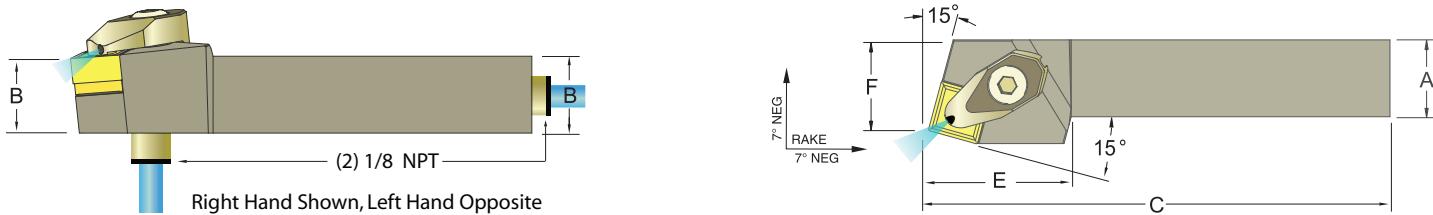ADSRN R/L Toolholder Style R - 15° side cutting lead angle for negative square SNM_inserts



Inch Description	Part No. 733101-	A	B	C	E	F	SNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H. L.H.												
ADSRNR/L-12-4B	53040 53041	0.75	0.75	4.50	1.375	0.880	432	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSRNR/L-16-4D	53043 53044	1.00	1.00	6.00	1.375	1.000	432	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSRNR/L-20-5D	53045 53046	1.25	1.25	6.00	1.375	1.000	543	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADSRNR/L-24-5E	53047 53048	1.50	1.50	7.00	1.375	1.000	543	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

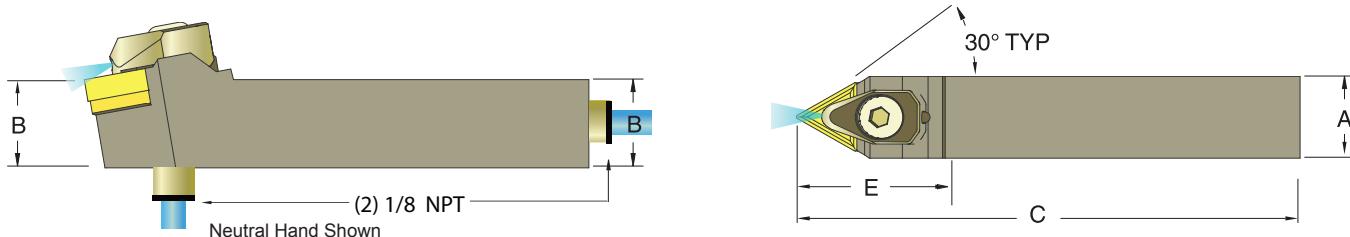ADTENN Toolholder Style E - 30° side cutting lead angle for negative triangle TNM_inserts



Inch Description	Part No. 733101-	A	B	C	E	TNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	Neutral											
ADTENN-12-3B	53075	0.75	0.75	4.50	1.375	332	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTENN-12-4B	53076	0.75	0.75	4.50	1.375	432	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADTENN-16-3D	53077	1.00	1.00	6.00	1.375	332	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTENN-16-4D	53078	1.00	1.00	6.00	1.375	432	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADTENN-20-4D	53079	1.25	1.25	6.00	1.500	432	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
*ADTENN-24-4E	53080	1.50	1.50	7.00	1.625	432	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

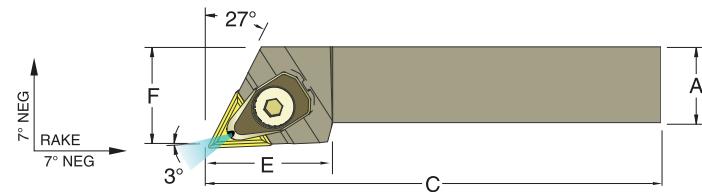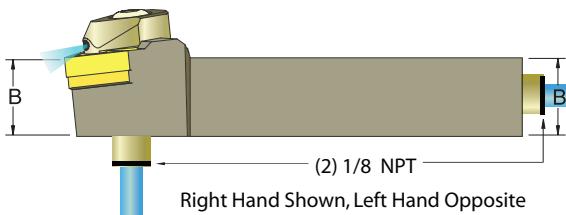**ADTJN R/L Toolholder Style J - 3° side cutting lead angle for negative triangle TNM_ inserts**



Inch Description	Part No. 733101-							TNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADTJNR/L-12-3B	53063	53064	0.75	0.75	4.50	1.250	1.000	332	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-12-4B	53065	53066	0.75	0.75	4.50	1.250	1.250	432	ITSN-433	SM-S4	JSLC-HPCTW4N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-16-3D	53067	53068	1.00	1.00	6.00	1.250	1.500	332	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-16-4D	53069	53070	1.00	1.00	6.00	1.250	2.000	432	ITSN-433	SM-S4	JSLC-HPCTW4N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-20-4D	53071	53072	1.25	1.25	6.00	1.375	2.000	432	ITSN-433	SM-S4	JSLC-HPCTW4N	JSCS-04	JSOR-01	JSOR-04
*ADTJNR/L-24-4E	53073	53074	1.50	1.50	7.00	1.500	2.000	432	ITSN-433	SM-S4	JSLC-HPCTW4N	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

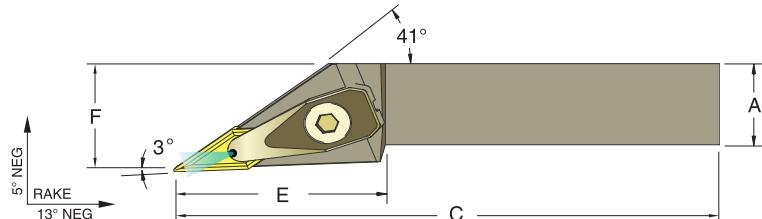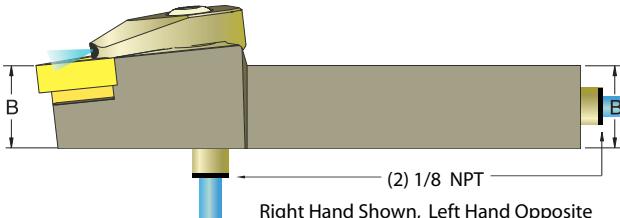ADVJN R/L Toolholder Style J - Negative 3° side cutting lead angle for negative 35° diamond VNM_ inserts

Inch Description	Part No. 733101-							VNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADVJNR/L-12-3B	53081	53082	0.75	0.75	4.50	1.750	1.000	332	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04
ADVJNR/L-16-3D	53083	53084	1.00	1.00	6.00	1.750	1.250	332	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04
ADVJNR/L-20-3D	53085	53086	1.25	1.25	6.00	1.750	1.500	332	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04
*ADVJNR/L-24-3E	53087	53088	1.50	1.50	7.00	1.750	2.000	332	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

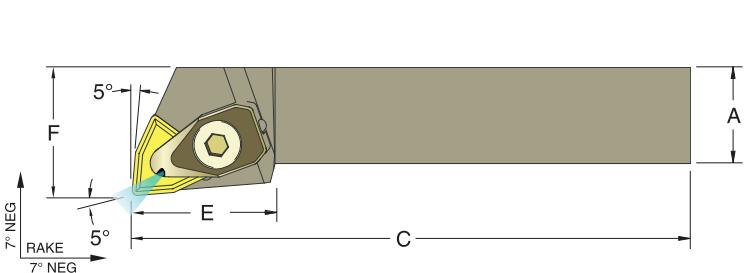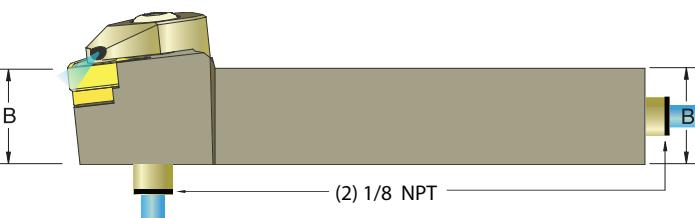ADWLN R/L Toolholder Style L - Negative 5° end or side cutting lead angle for negative 80° trigon WNM_ inserts

Inch Description	Part No. 733101-							WNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADWLNR/L-12-3B	53093	53094	0.75	0.75	4.50	1.000	1.000	332	IWSN-322	SM-M3	*JSLC-HPTW3R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-12-4B	53095	53096	0.75	0.75	4.50	1.250	1.000	432	S8008P	SM-M4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-16-3D	53097	53098	1.00	1.00	6.00	1.000	1.250	332	IWSN-322	SM-M3	*JSLC-HPTW3R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-16-4D	53099	53100	1.00	1.00	6.00	1.250	1.250	432	S8008P	SM-M4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-20-4D	53101	53102	1.25	1.25	6.00	1.250	1.500	432	S8008P	SM-M4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
*ADWLNR/L-24-4E	53103	53104	1.50	1.50	7.00	1.250	2.000	432	S8008P	SM-M4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



70 - 1400 psi (5 -100 Bar)


For Inch Boring Bars see Pages 18-20


For Metric Boring Bars see Pages 37-39






Jet-Stream™ (Boring Bar)- Identification System

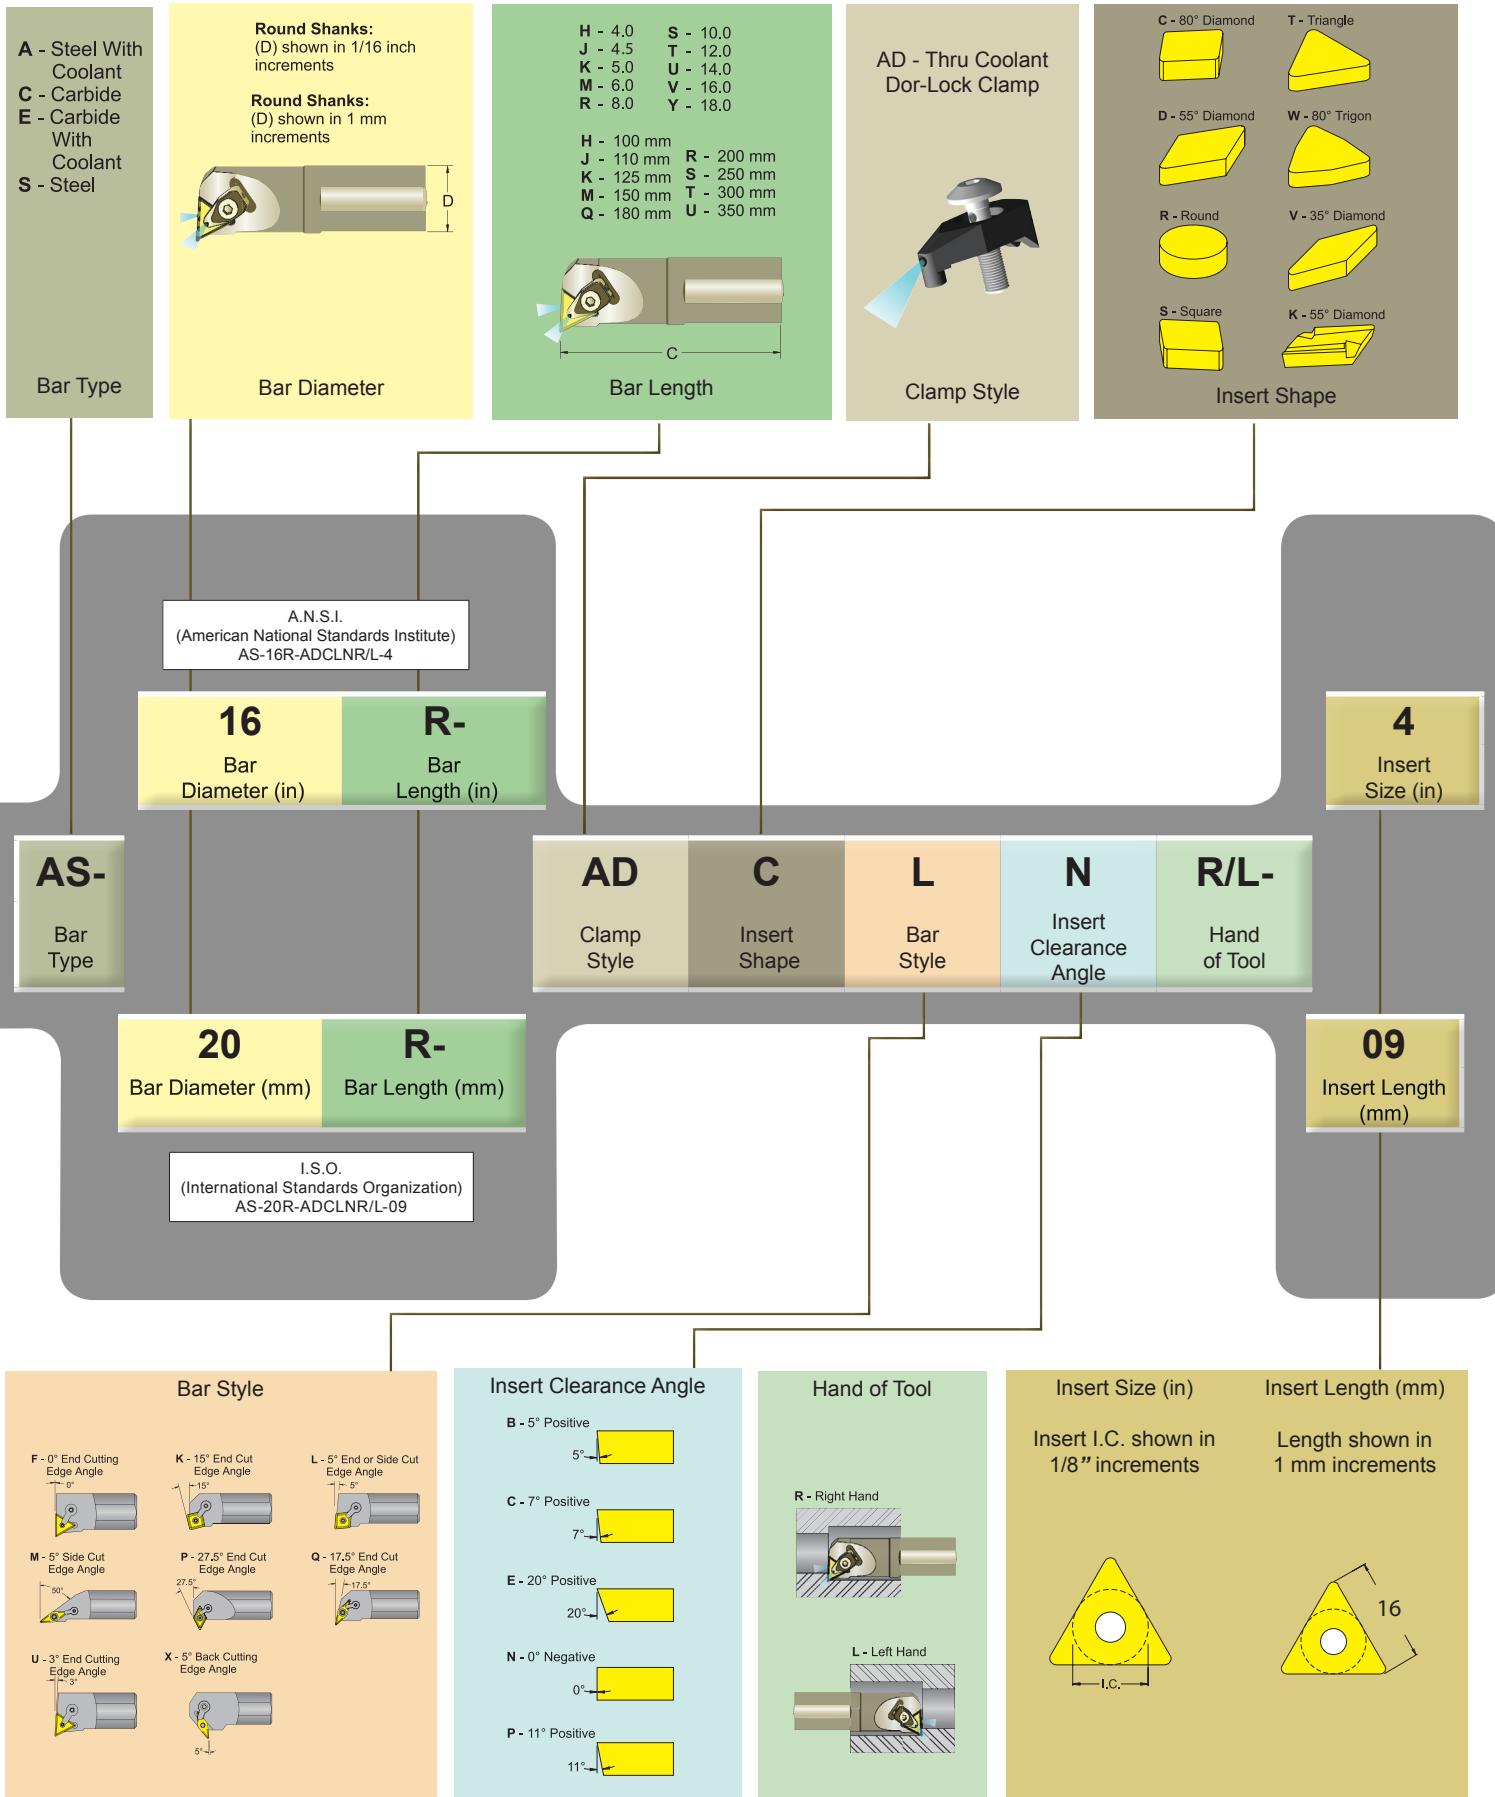

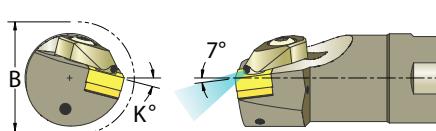
**AS-ADCLN R/L Boring Bar Style L - Negative 5° side & end cutting lead angle for negative 80° diamond CNM_inserts**

Right Hand Shown, Left Hand Opposite

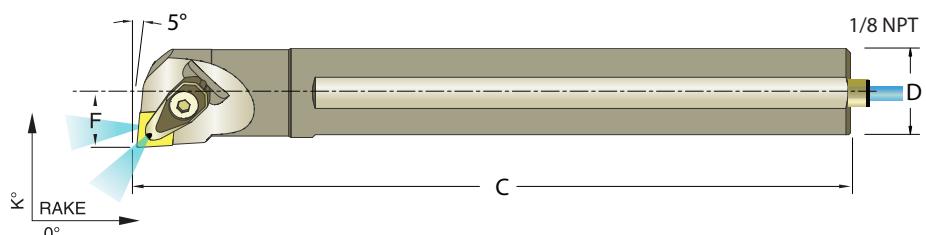


Inch Description	Part No. 733101-		B	C	D	F	K°	CNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-12R-ADCLNR/L-3	53120	53121	1.000	8.00	0.75	0.500	10°	322	N/A	N/A	JSLC-HPC3-B	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-16R-ADCLNR/L-4	53122	53123	1.280	8.00	1.00	0.640	14°	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-20S-ADCLNR/L-4	53124	53125	1.530	10.00	1.25	0.765	14°	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADCLNR/L-4	53126	53127	1.780	10.00	1.50	0.890	11°	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADCLNR/L-4	53128	53129	2.562	12.00	2.00	1.281	11°	432	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADCLNR/L-5	53130	53131	2.562	12.00	2.00	1.281	11°	543	ICSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

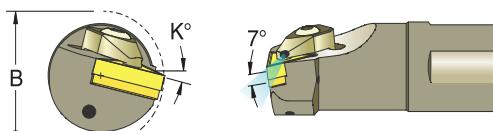
AS-ADTUN R/L Boring Bar Style U - Negative 3° end cutting lead angle for negative triangle TNM_inserts

Right Hand Shown, Left Hand Opposite

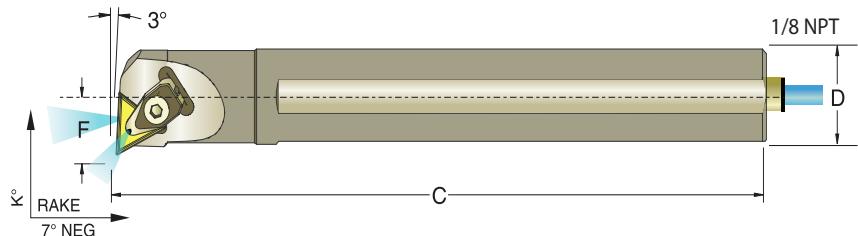


*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		B	C	D	F	K°	TNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-12R-ADTUNR/L-3	53172	53173	1.000	8.00	0.75	0.500	14°	322	N/A	N/A	*JSLC-HPDT3-BR/L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-16R-ADTUNR/L-3	53174	53175	1.280	8.00	1.00	0.640	14°	332	ITSN-322	SM-M3	*JSLC-HPDT3-BR/L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-20S-ADTUNR/L-4	53176	53177	1.530	10.00	1.25	0.765	14°	432	ITSN-432	SM-S4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADTUNR/L-4	53178	53179	2.060	10.00	1.50	0.890	11°	432	ITSN-432	SM-S4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADTUNR/L-4	53180	53181	2.562	12.00	2.00	1.281	11°	432	ITSN-433	SM-S4	*JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

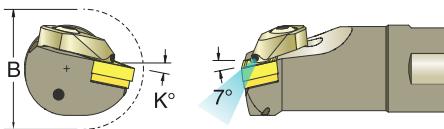AS-ADDUN R/L Boring Bar Style U - Negative 3° end cutting lead angle for negative 55° diamond DNM_inserts


Right Hand Shown, Left Hand Opposite

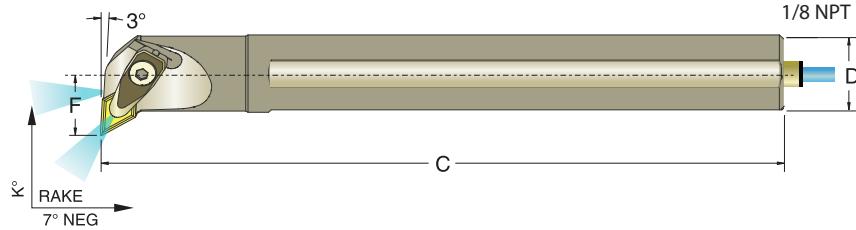


*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		B	C	D	F	K°	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-16R-ADDUNR/L-3	53137	53138	1.300	8.00	1.00	0.750	11°	332	S5511P	SM-M3	*JSLC-HPDT3-BR/L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-20S-ADDUNR/L-4	53139	53140	2.000	10.00	1.25	1.000	11°	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADDUNR/L-4	53141	53142	2.250	10.00	1.50	1.125	11°	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADDUNR/L-4	53143	53144	3.000	12.00	2.00	1.375	11°	432	IDSN-433	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

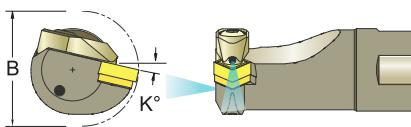
**AS-ADDPN R/L Boring Bar Style P- Negative 27.5° end cutting lead angle for negative 55° diamond DNM_ inserts**

Right Hand Shown, Left Hand Opposite

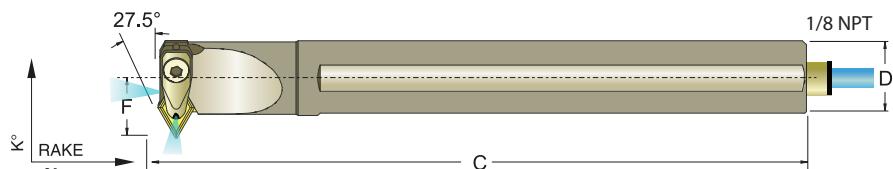


Inch Description	Part No. 733101-		B	C	D	F	K°	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20S-ADDPNR/L-4	53150	53151	1.705	10.00	1.25	1.000	13°	432	IDSN-433	SM-S4	JSCL-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADDPNR/L-4	53152	53153	2.000	10.00	1.50	1.125	10°	432	IDSN-433	SM-S4	JSCL-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

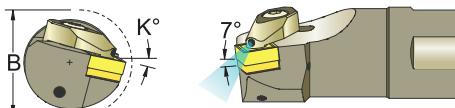
AS-ADSKN R/L Boring Bar Style K - 15° End cutting lead angle for negative square SNM_ inserts

Right Hand Shown, Left Hand Opposite

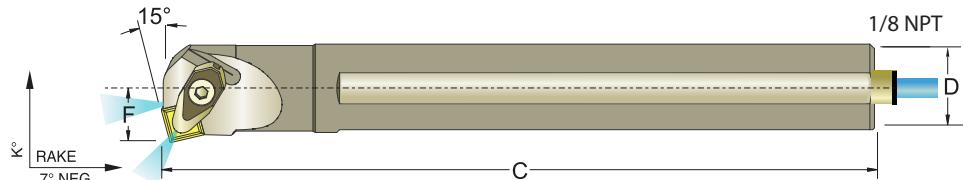


Inch Description	Part No. 733101-		B	C	D	F	K°	SNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20S-ADSKNR/L-4	53159	53160	1.53	10.00	1.25	0.765	10°	432	S9012P	SM-M4	JSCL-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADSKNR/L-4	53161	53162	1.76	10.00	1.50	0.890	11°	432	S9012P	SM-M4	JSCL-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADSKNR/L-4	53163	53164	2.400	12.00	2.00	1.281	12°	432	S9012P	SM-M4	JSCL-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADSKNR/L-5	53165	53166	2.400	12.00	2.00	1.281	12°	543	ISSN-533	SM-M6	JSCL-HPC5	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

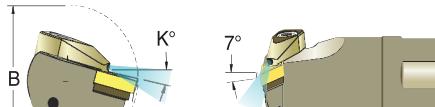
AS-ADVUN R/L Boring Bar Style U - Negative 3° side cutting lead angle for negative 35° diamond VNM_ inserts

Right Hand Shown, Left Hand Opposite

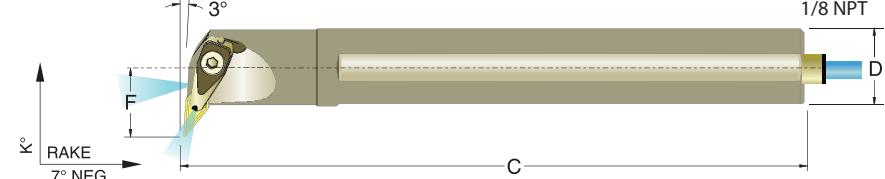


Inch Description	Part No. 733101-		B	C	D	F	K°	VNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20S-ADVUNR/L-3	53189	53190	2.250	10.00	1.25	1.125	14°	332	S3516P	SM-M3	JSCL-HPV3	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADVUNR/L-3	53191	53192	2.500	10.00	1.50	1.250	11°	332	S3516P	SM-M3	JSCL-HPV3	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

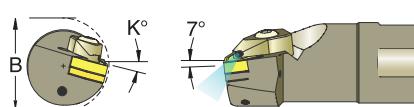AS-ADWLN R/L Boring Bar Style L - Negative 5° end & side cutting lead angle for negative 80° trigon WNM_ inserts

Right Hand Shown, Left Hand Opposite

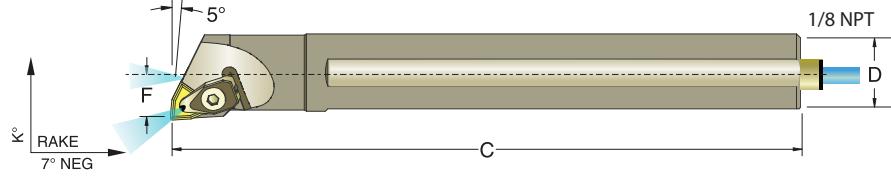

*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		B	C	D	F	K°	WNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-12R-ADWLR/L-3	53198	53199	1.000	8.00	0.75	0.500	14°	332	N/A	N/A	*JSCL-HPW3-R/L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-16R-ADWLR/L-4	53200	53201	1.280	8.00	1.00	0.640	14°	432	S8008P	SM-M4	*JSCL-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-20S-ADWLR/L-4	53202	53203	1.530	10.00	1.25	0.765	14°	432	S8008P	SM-M4	*JSCL-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADWLR/L-4	53204	53205	1.780	10.00	1.50	0.890	11°	432	S8008P	SM-M4	*JSCL-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32T-ADWLR/L-4	53206	53207	2.000	12.00	2.00	1.281	12°	432	S8008P	SM-M4	*JSCL-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



70 - 1400 psi (5 -100 Bar)


For Inch Threading Toolholders see Pages 27-33
For Metric Threading Toolholders see Pages 39-41






Enhance Performance in:


O.D. Threading

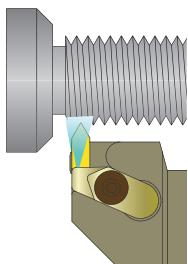

I.D. Threading

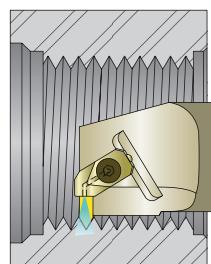

Grooving

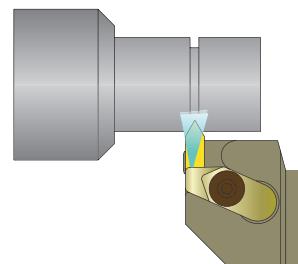


Threading and Grooving - Selection Chart

On Edge Style	Machining Applications			Insert Shape		
	Best	Good		Threading	Grooving	
External	Threading	Grooving		Positive	Negative	Positive
Internal						Negative
Laydown Style	Machining Applications			Insert Shape		
	Best	Not Available		Threading	Grooving	
External	Threading	Grooving				
Internal						Not Available
DorNotch Style	Machining Applications			Insert Shape		
	Good	Best		Threading	Grooving	
External	Threading	Grooving		Positive	Neutral	Positive
Internal						Neutral



Thread Terminology

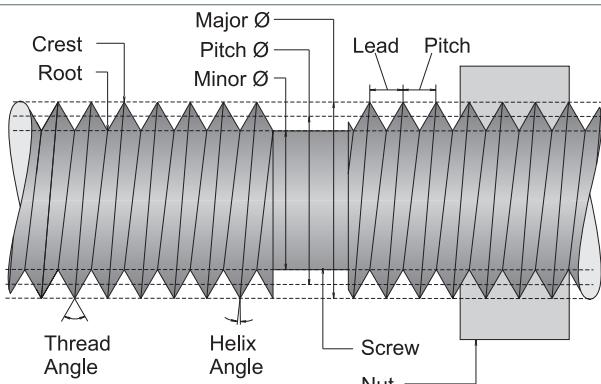

Thread Definitions

Crest - The outer most surface of the thread form which joins the flanks.

Helix angle - The angle between the direction of the threads around a screw and a line running at a right angle to the shank.

Lead - The distance a thread will advance along its axis in one complete revolution.

major diameter - The largest diameter of a straight screw thread.

Minor diameter - The smallest diameter of a screw thread. Also known as the "root diameter."


Pitch - The distance from any point on a thread to the corresponding point on the adjacent thread measured parallel to the axis.

Pitch diameter - The diameter of a thread at an imaginary point where the width of the groove and the width of the thread are equal.


Root - The inner most surface of a thread form.

Thread angle - The angle formed by the two sides of the thread (or their projections) with each other.


Right Hand Thread

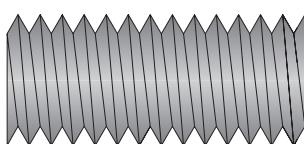


Left Hand Thread

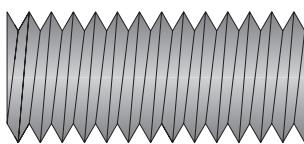


Single Lead Thread

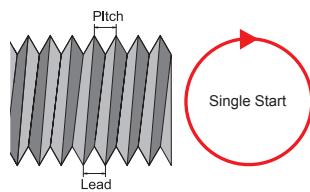

Double Lead Thread

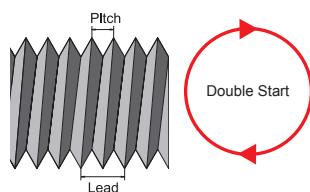


Triple Lead Thread

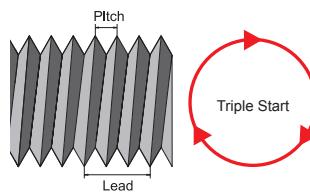

Thread Cutting Methods

In-feed Angle & Cutting Directions (→ →) Shown below

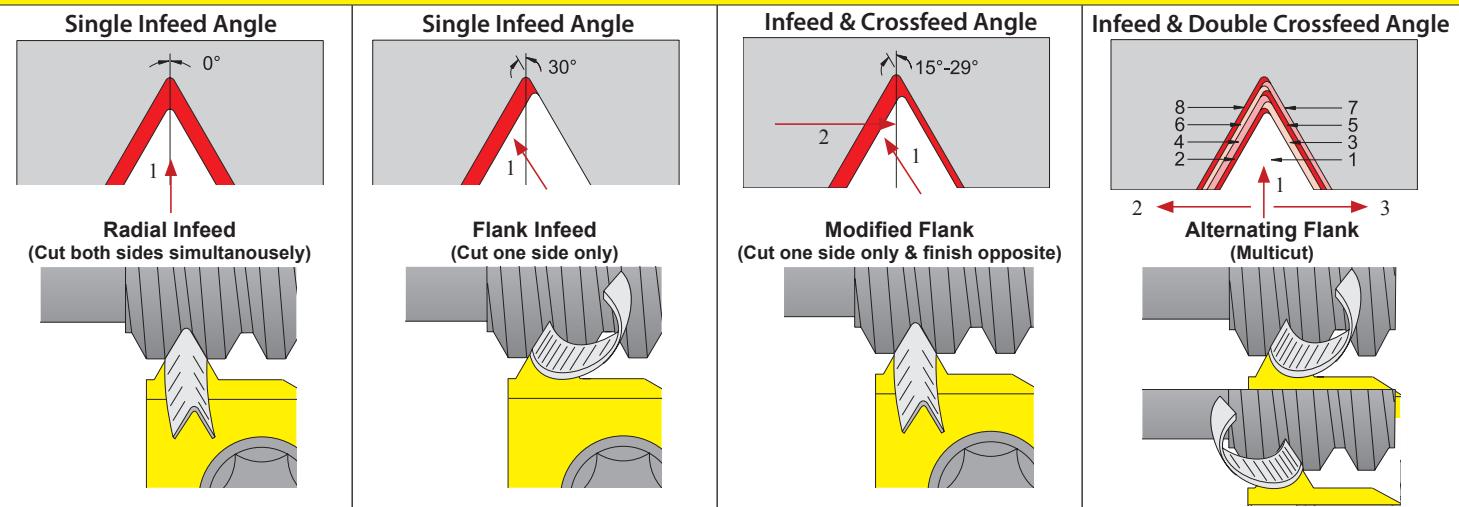

Pros:

- Most commonly used. Often only choice in mechanical operations
- Edge is protected from chipping since all of the cutting edge is located in the cut

Cons:

- Channel chip is created that may be difficult to control
- Burr condition is increased
- Tends to chatter

Pros:

- Leading edge of insert is used to make the cut resulting in better chip flow
- Reduced Burring

Cons:

- Trail edge of insert is prone to chipping
- Poor choice of soft materials like aluminum, stainless steel or low carbon steel

Pros:

- Edge is protected from chipping since all of the cutting edge is located in the cut

Cons:

- Channel chip is created that may be difficult to control
- Burr condition is increased
- Tends to chatter

Pros:

- Mainly used for large profiles
- Increased Tool Life
- Insert wears evenly


Cons:

- Difficult to achieve manually
- Requires special programs on CNC machines




On Edge Threading Methods


EXTERNAL RIGHT HAND THREAD

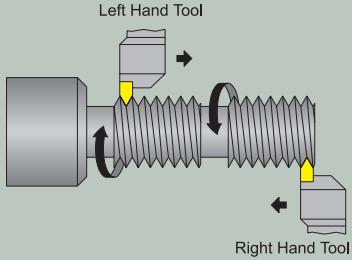


EXTERNAL LEFT HAND THREAD

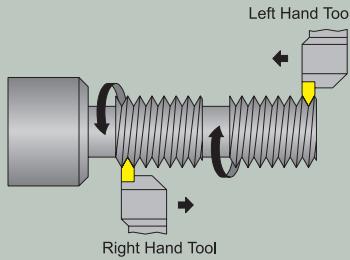

INTERNAL RIGHT HAND THREAD

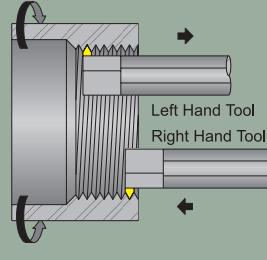

INTERNAL LEFT HAND THREAD

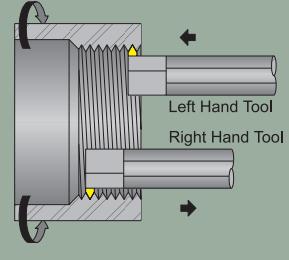


Toolholder Threading Method


Threading Bar Threading Method

Laydown Threading Methods


EXTERNAL RIGHT HAND THREAD

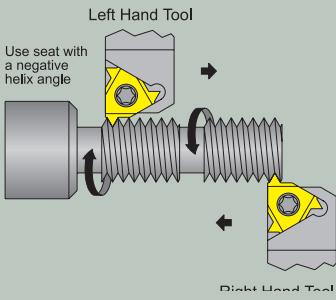


EXTERNAL LEFT HAND THREAD

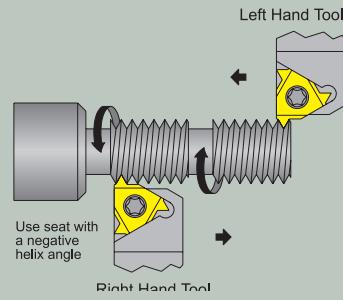

INTERNAL RIGHT HAND THREAD

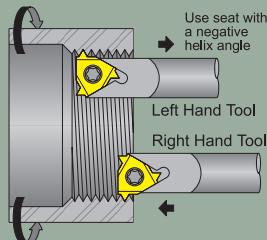

INTERNAL LEFT HAND THREAD

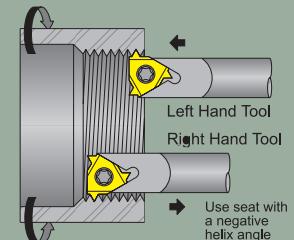


Toolholder Threading Method


Threading Bar Threading Method

DorNotch Threading Methods


EXTERNAL RIGHT HAND THREAD

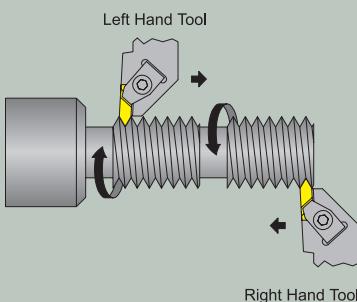


EXTERNAL LEFT HAND THREAD

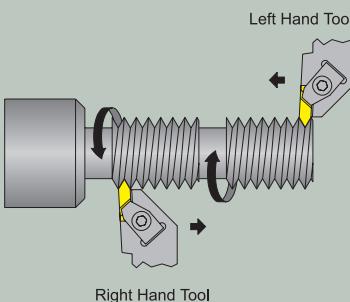

INTERNAL RIGHT HAND THREAD

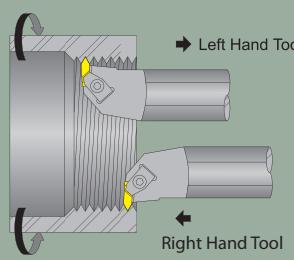

INTERNAL LEFT HAND THREAD

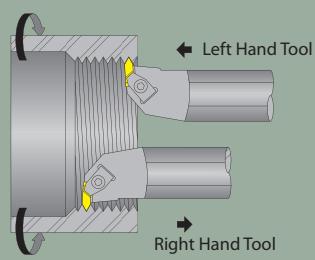

Toolholder Threading Method

Threading Bar Threading Method



In Blind Threading Applications:

The advanced design of the Jet-Stream™ Threading Bar offers the ability to use the front coolant port to flush chips out of the way so that they do not get packed or re-cut, by simply installing the supplied coolant nozzle screw. This will help prevent damage to the insert, the tool itself and even the part that is being cut. If this is not necessary in an application just replace the coolant screw with the already supplied solid screw and this will disable the front coolant port and use only the coolant port at the tip of the insert.

PVD-TiN, Materials and Quality


The body's of the Jet-Stream™ Toolholders and Boring Bars are built with chromuim-molybdenum alloy steel. This material features properties of high tensile strength and high yield stress resistance. This material is heat treated to 40-44Rc and Electroless Nickel Coated.

Electoless Nickel Coating will prevent the tools against rust providing a long tool life under severe working conditions.



Threading Bars



Threading Toolholders

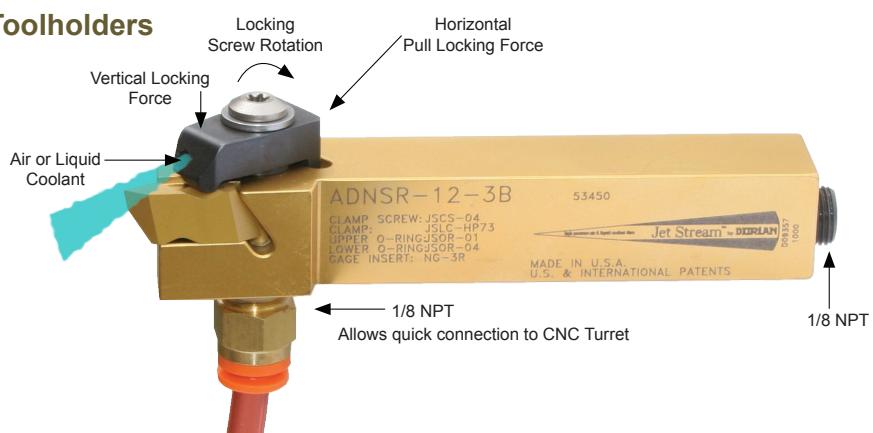


Standard Spare Parts

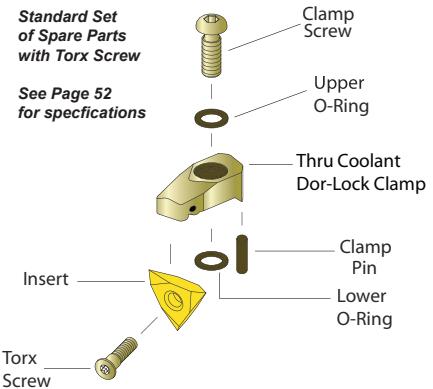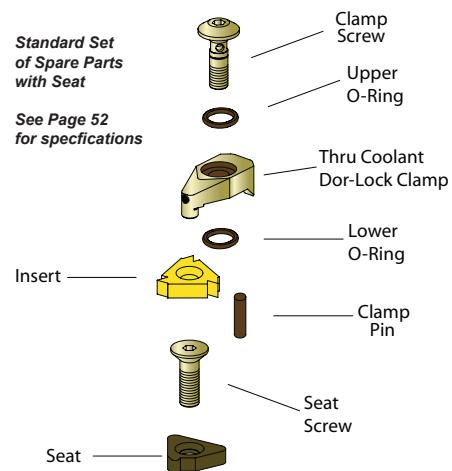




Jet-Stream™ (On Edge Threading)-Identification System


On Edge Threading Toolholder

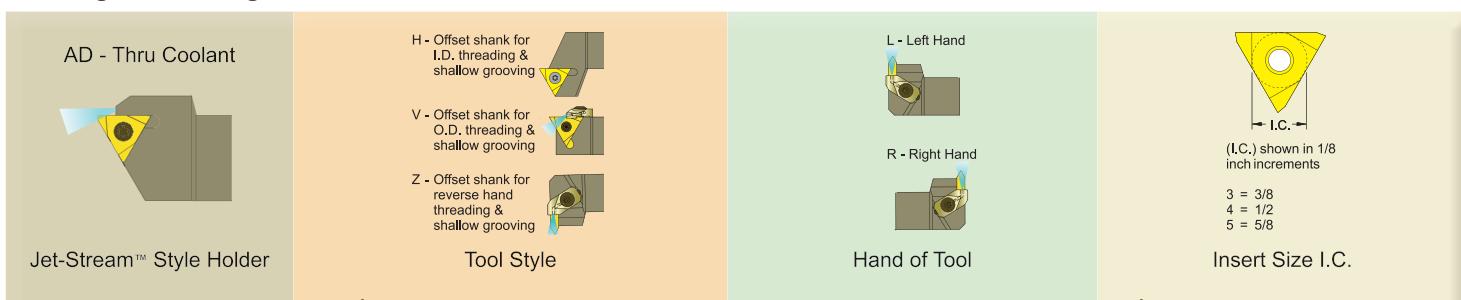

AD	T	V	O	R/L	16-	4	D
Holder Style	Insert Shape	Tool Style	Rake Attitude	Hand of Tool	Shank Size	Insert Size I.C.	Tool Length
A.N.S.I. (American National Standards Institute)							


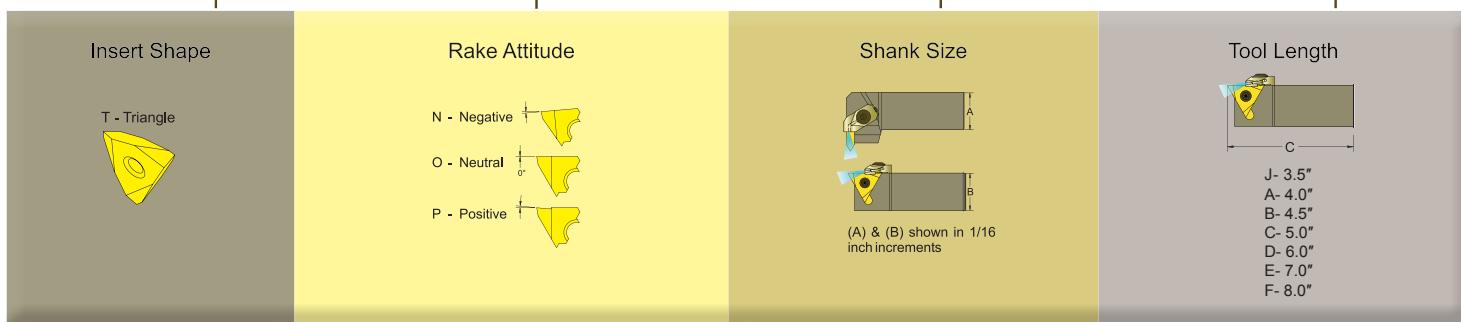


On Edge Threading Bar

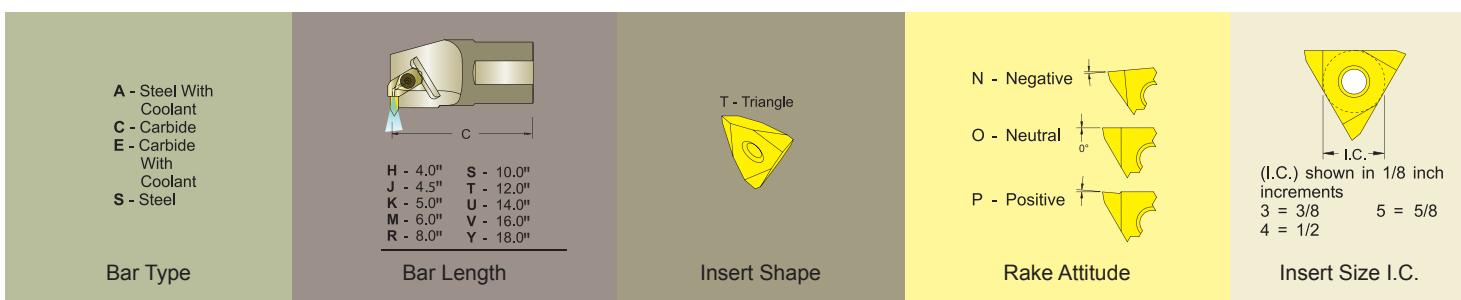

AS-	16	R-	AD	T	H	O	R/L-	4
Bar Type	Bar Size	Bar Length	Bar Style	Insert Shape	Tool Style	Rake Attitude	Hand of Tool	Insert Size I.C.
A.N.S.I. (American National Standards Institute)								

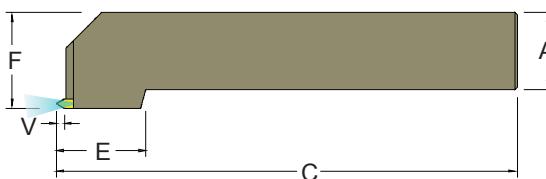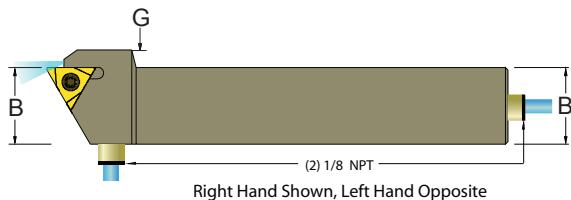


**ADTVO R/L Toolholder Style V - O.D. Threading and shallow grooving for triangle TNMC inserts**


*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		A	B	C	E	F	G	V	TNMC Gage Insert	Insert Tork Screw	Tork Key
	R.H.	L.H.										
ADTVOR/L12-3B	53400	53401	0.75	0.75	4.50	1.02	0.88	0.13	0.15	322	GTS-1	T-10
ADTVOR/L16-3D	53402	53403	1.00	1.00	6.00	1.16	1.25	0.25	0.15			
ADTVOR/L12-4B	53404	53405	0.75	0.75	4.50	1.25	0.88	0.13	0.23			
ADTVOR/L16-4D	53406	53407	1.00	1.00	6.00	1.25	0.88	0.13	0.23			
ADTVOR/L20-4D	53408	53409	1.25	1.25	6.00	1.25	0.25	0.23	0.23	432	GTS-2	T-20
ADTVOR/L24-4E	53410	53411	1.50	1.50	7.00	1.25	1.75	0.25	0.23			
ADTVOR/L20-5D	53414	53415	1.25	1.25	6.00	1.50	1.50	0.25	0.29			
ADTVOR/L24-5E	53416	53417	1.50	1.50	7.00	1.50	1.75	0.25	0.29	543	GTS-3	T-20

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

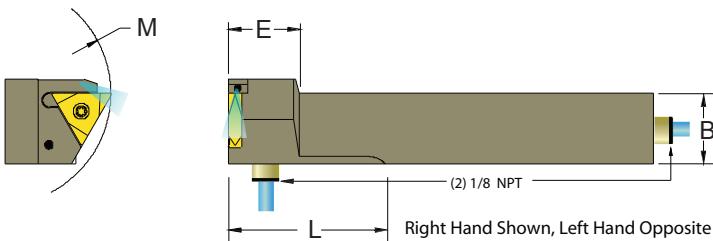ADTHO R/L Toolholder Style H - Gang Toolholder for shallow grooving or I.D. threading for triangle TNMC inserts

For Both Internal and External Operations

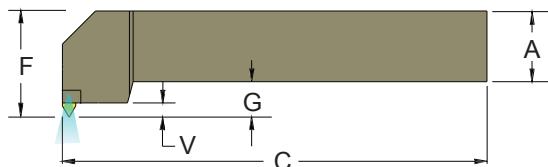


*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		A	B	C	E	F	G	V	L	TNMC Gage Insert	Insert Tork Screw	Tork Key
	R.H.	L.H.											
ADTHOR/L12-4B	53425	53426	0.75	0.75	4.50	1.25	0.88	0.13	0.23	N/A			
ADTHOR/L16-4D	53427	53428	1.00	1.00	6.00	1.25	0.88	0.13	0.23	2.00	432	GTS-2	T-20
ADTHOR/L20-4D	53429	53430	1.25	1.25	6.00	1.25	1.50	0.25	0.23	2.00			
ADTHOR/L20-5E	53431	53432	1.25	1.25	7.00	1.25	1.50	0.25	0.29	2.50	543	GTS-3	T-20

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

AS-ADTHO R/L Threading Bar Style H - I.D. Threading and shallow grooving for triangle TNMC inserts



Right Hand Shown, Left Hand Opposite


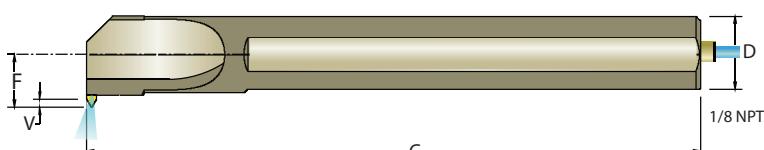


*Right clamp for right hand toolholder. Left clamp for left hand toolholder

Inch Description	Part No. 733101-		B	C	D	F	V	TNMC Gage Insert	Insert Tork Screw	Tork Key
	R.H.	L.H.								
AS-16R-ADTHOR/L-3	53436	53437	1.39	8.00	1.00	.687	.120	322	GTS-1	T-10
AS-20S-ADTHOR/L-4	53438	53439	1.812	10.00	1.25	.875	.19			
AS-24S-ADTHOR/L-4	53440	53441	2.250	10.00	1.50	1.00	.19	432	GTS-2	T-20
AS-32T-ADTHOR/L-4	53442	53443	3.00	12.00	2.00	1.328	.19			
AS-32T-ADTHOR/L-5	53444	53445	3.00	12.00	2.00	1.38	0.25			
AS-40T-ADTHOR/L-5	53446	53447	3.75	12.00	2.50	1.69	0.25	543	GTS-3	T-20



One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

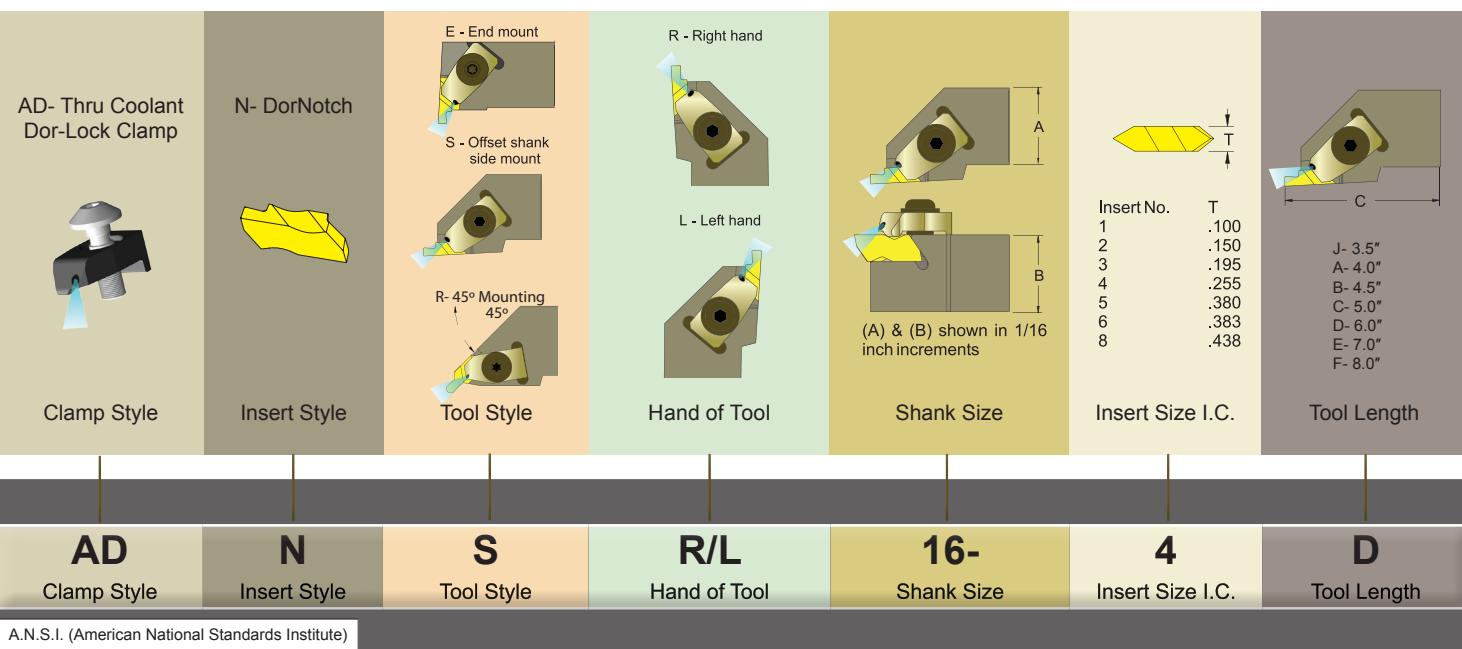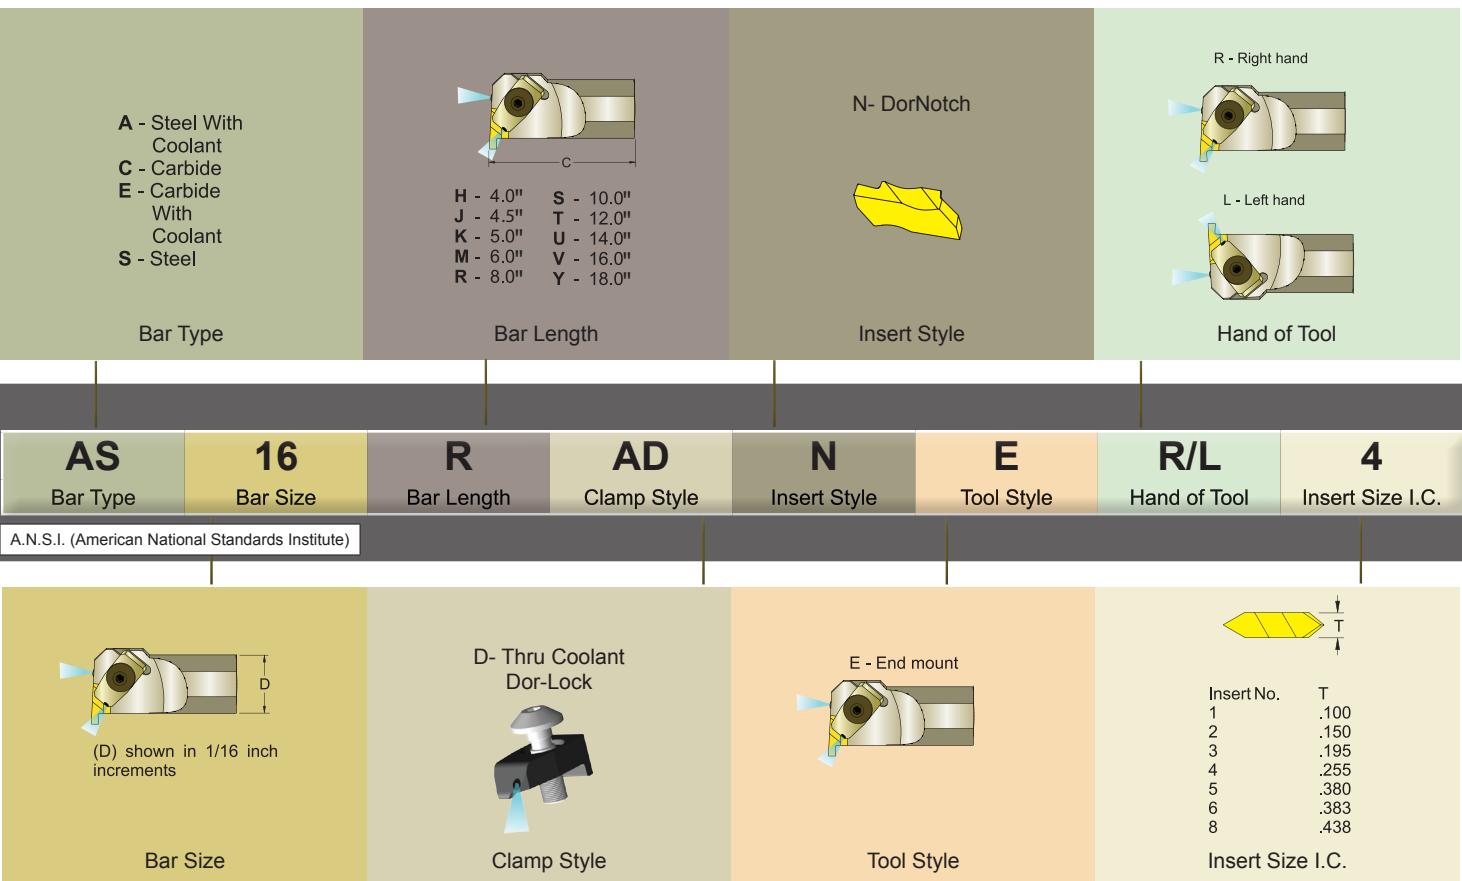**DorNotch Threading Toolholder****DorNotch Threading Bar**

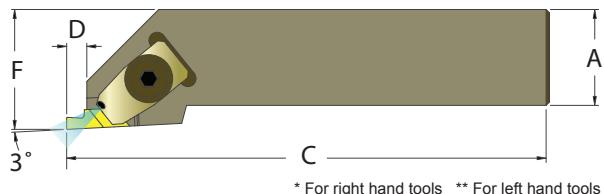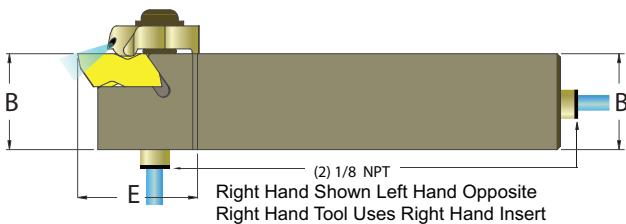**ADNS R/L Toolholder Style S - External DorNotch toolholder for threading and grooving DorNotch inserts**


Inch Description	Part No. 733101-		A	B	C	D	E	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	
	R.H.	L.H.														
ADNSR/L12-3B	53450	53451	0.75	0.75	4.50	0.21	1.25	1.00	* NG-3R ** NG-3L	N/A	N/A	* JSLC-HP72 ** JSLC-HP73	JSCS-04	JSOR-01	JSOR-04-DN	
ADNSR/L16-3D	53452	53453	1.00	1.00	6.00	0.21	1.25	1.25								
ADNSR/L20-3D	53454	53455	1.25	1.25	6.00	0.21	1.25	1.50								
ADNSR/L16-4D	53456	53457	1.00	1.00	6.00	0.29	1.38	1.25								
ADNSR/L20-4D	53458	53459	1.25	1.25	6.00	0.29	1.38	1.50	* NG-4R ** NG-4L	SM-420	SL-344	* JSLC-HP72 ** JSLC-HP73	JSCS-04	JSOR-01	JSOR-04-DN	
ADNSR/L24-4E	53460	53461	1.50	1.50	7.00	0.29	1.38	1.75								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

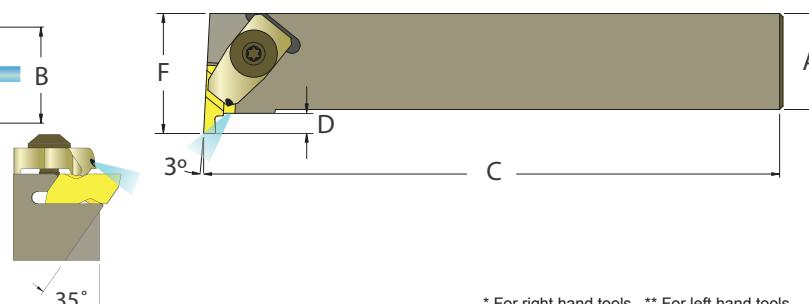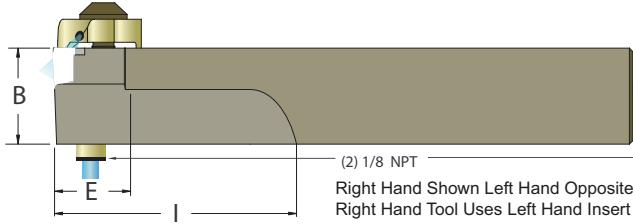ADNE R/L Toolholder Style E- Gang external DorNotch toolholder for threading and grooving DorNotch inserts

Inch Description	Part No. 733101-		A	B	C	D	E	F	I	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.														
ADNER/L12-3B	53465	53466	0.75	0.75	4.50	0.21	0.75	1.13	2.00	* NG-3L ** NG-3R	N/A	N/A	* JSLC-HP73 ** JSLC-HP72	JSCS-04	JSOR-01	JSOR-04-DN
ADNER/L16-3D	53467	53468	1.00	1.00	6.00	0.21	0.75	1.25	2.00							
ADNER/L20-3D	53469	53470	1.25	1.25	6.00	0.21	0.75	1.50	2.00							
ADNER/L16-4D	53471	53472	1.00	1.00	6.00	0.29	0.75	1.38	2.00	* NG-4L ** NG-4R	N/A	N/A	* JSLC-HP73 ** JSLC-HP72	JSCS-04	JSOR-01	JSOR-04-DN
ADNER/L20-4D	53473	53474	1.25	1.25	6.00	0.29	0.75	1.63	2.00							

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

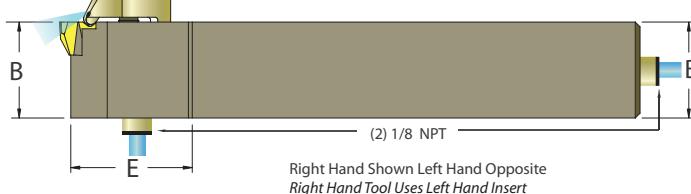
ADNR R/L Toolholder Style R- Corner grooving external DorNotch toolholder for grooving DorNotch inserts**For Corner Grooving**

Inch Description	Part No. 733101-		A	B	C	D	E	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	
	R.H.	L.H.														
ADNRR/L12-3B	53480	53481	0.75	0.75	4.50	0.14	1.25	1.00	* NU-3L ** NU-3R	N/A	N/A	* JSLC-HP73 ** JSLC-HP72	JSCS-04	JSOR-01	JSOR-04-DN	
ADNRR/L16-3D	53482	53483	1.00	1.00	6.00	0.14	1.25	1.25								
ADNRR/L20-3D	53484	53485	1.25	1.25	6.00	0.14	1.38	1.50								


One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



AS-ADNE R/L Boring Bar Style E- Internal DorNotch Boring Bar for threading and grooving DorNotch inserts

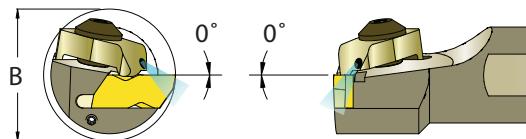

Right Hand Shown Left Hand Opposite
Right Hand Tool Uses Left Hand Insert

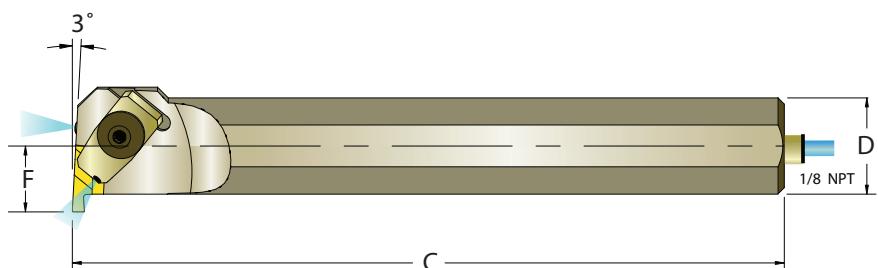


* For right hand tools ** For left hand tools

Inch Description	Part No. 733101-		B	C	D	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.												
AS-16R-ADNER/L-3	53490	53491	1.38	8.00	1.00	0.69	* NG-3L ** NG-3R	N/A	N/A	* JSLC-HP73 ** JSLC-HP72	JSCS-04	JSOR-01	JSOR-04-DN	JSPN-M6
AS-20S-ADNER/L-3	53492	53493	1.75	10.00	1.25	0.88								
AS-24S-ADNER/L-3	53494	53495	2.00	10.00	1.50	1.00								
AS-32T-ADNER/L-4	53496	53497	2.75	12.00	2.00	1.38								


One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.





Laydown Threading Toolholder

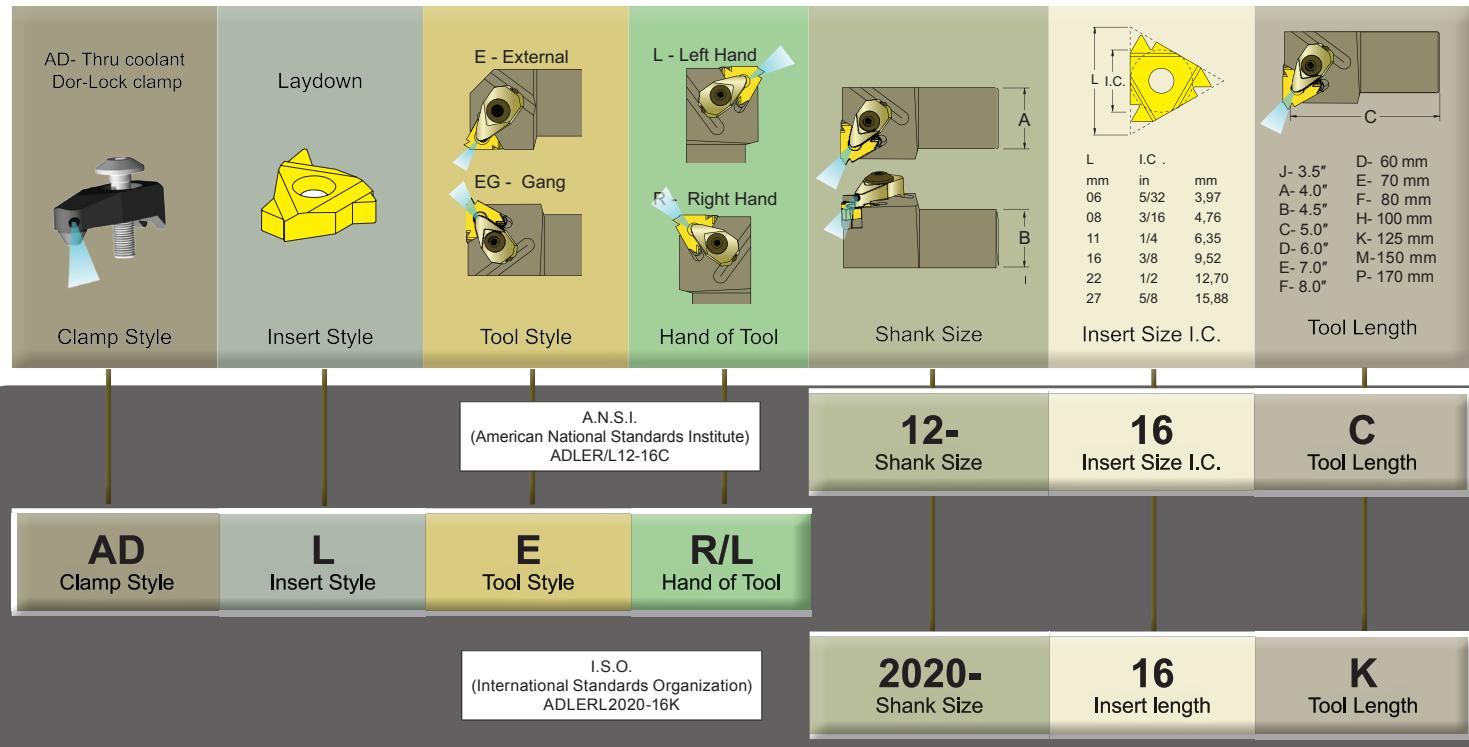

Laydown Threading Bar


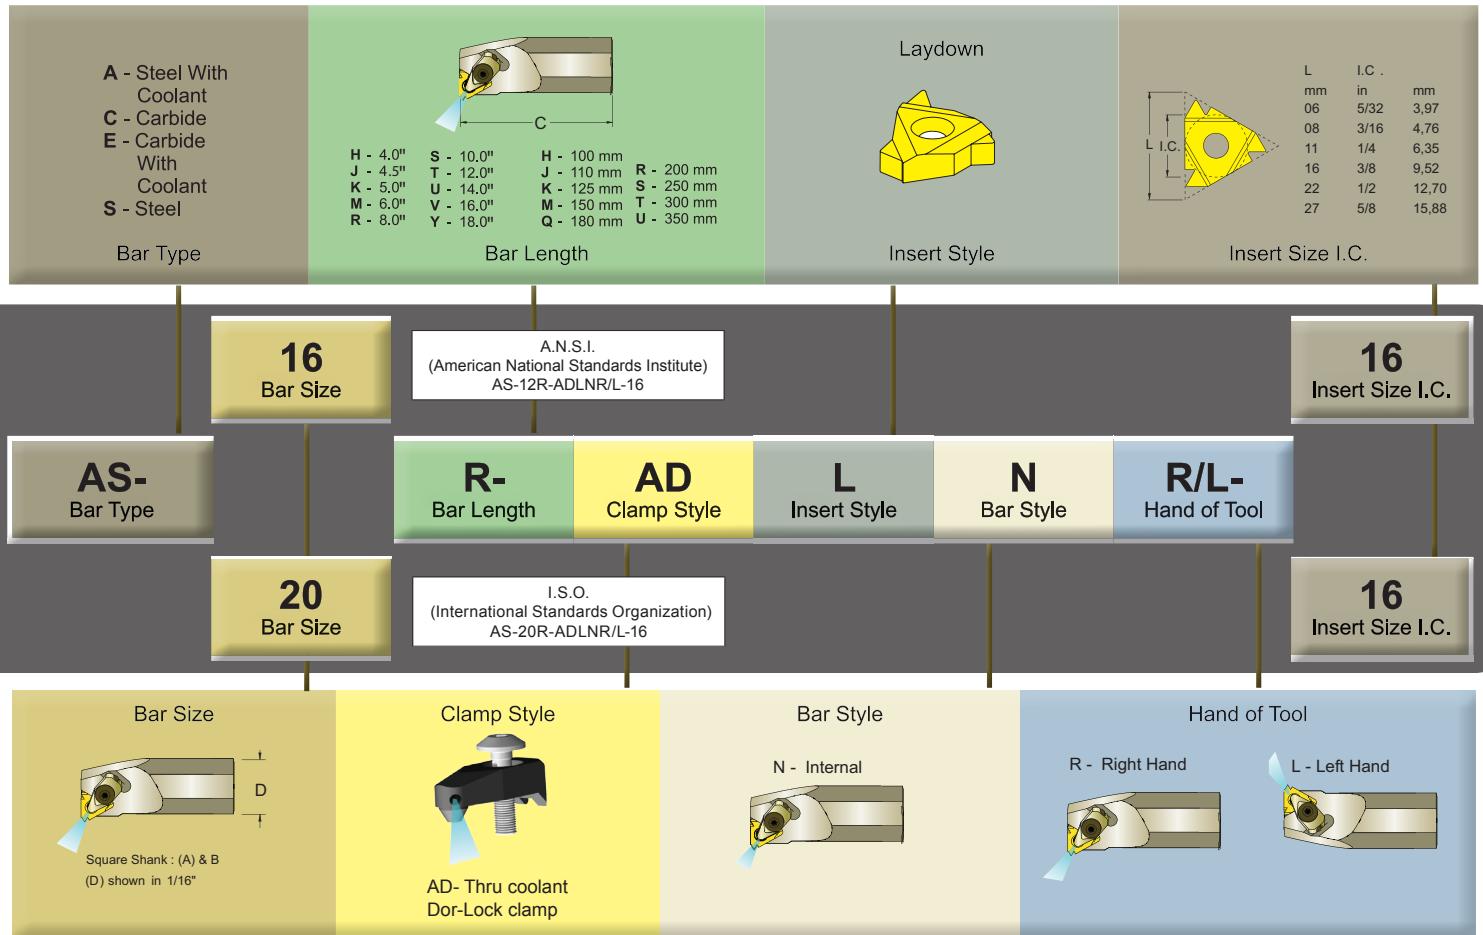


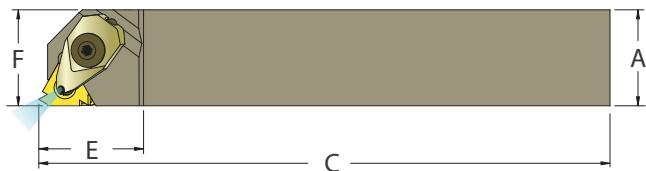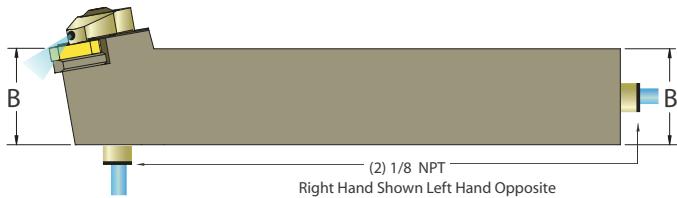**ADLE R/L Toolholder Style E- Laydown toolholder for Laydown inserts**

Inch Description	Part No. 733101-							Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADLER/L12-16C	53510	53511	0.75	0.75	5.00	1.25	0.75	16-G60	GX-16-1	GXE-16	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06
ADLER/L16-16D	53512	53513	1.00	1.00	6.00	1.25	1.00							

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.


*Right hand toolholder use a right hand clamp and Left hand toolholder use a left hand clamp.

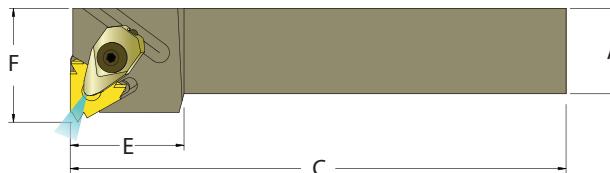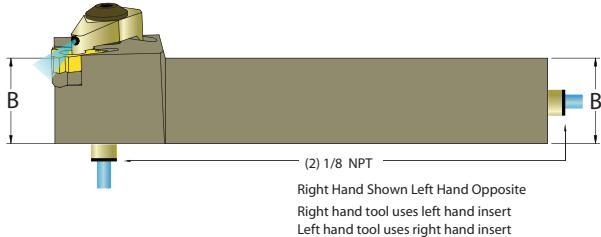ADLEG R/L Toolholder Style EG- Gang toolholder for Gang tool post for Laydown inserts

Inch Description	Part No. 733101-							Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADLEG/L12-16C	53516	53517	0.75	0.75	5.00	1.25	1.00	16-G60	GX-16-1	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06
ADLEG/L16-16D	53518	53519	1.00	1.00	6.00	1.25	1.25							


One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand toolholder use a left hand clamp and Left hand toolholder use a right hand clamp.

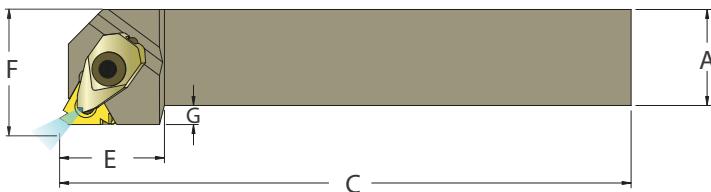
ADLE R/L Qualified Toolholder Style E- Offset head for Laydown inserts

Inch Description	Part No. 733101-							Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	
	R.H.	L.H.	A	B	C	E	F	G							
ADLER/L12-16Q-C	53522	53523	0.75	0.75	5.00	1.25	1.00	0.25	16-G60	GX-16-1	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06
ADLER/L16-16Q-D	53524	53525	1.00	1.00	6.00	1.25	1.25	0.25							
ADLER/L20-16Q-D	53526	53527	1.25	1.25	6.00	1.25	1.50	0.25	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04
ADLER/L16-22Q-D	53528	53529	1.00	1.00	6.00	1.50	1.25	0.25							
*ADLER/L20-22Q-D	53530	53531	1.25	1.25	6.00	1.50	1.50	0.25							

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.
*Right hand toolholder use a right hand clamp and Left hand toolholder use a left hand clamp.

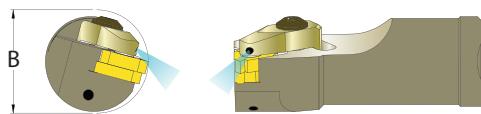**AS-ADLN R/L Boring Bar Style N - Internal Laydown bar for Laydown threading**


Right Hand Shown, Left Hand Opposite

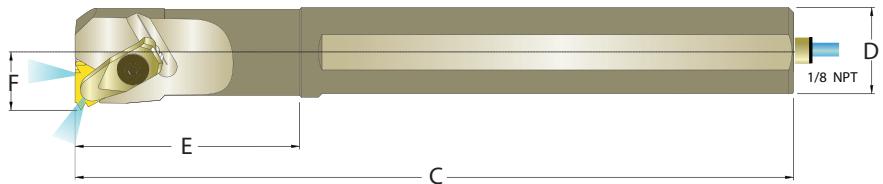

Inch Description	Part No. 733101-		B	C	D	E	F	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-12R-ADLNR/L-16	53533	53534	1.12	8.00	0.75	2.00	.52								
AS-16R-ADLNR/L-16	53535	53536	1.37	8.00	1.00	2.50	.65	16-G60	GXE-16	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-20S-ADLNR/L-16	53537	53538	1.62	10.00	1.25	2.50	.78								
AS-24S-ADLNR/L-16	53539	53540	1.87	10.00	1.50	2.50	.90								
AS-20S-ADLNR/L-22	53541	53542	1.75	10.00	1.25	2.50	1.50	22-N60	NXE-16	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-24S-ADLNR/L-22	53543	53544	2.00	10.00	1.50	2.50	1.25								
AS-32T-ADLNR/L-22	53545	53546	2.50	12.00	2.00	2.50	1.50								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand bars use a left hand clamp and Left hand bars use a right hand clamp.

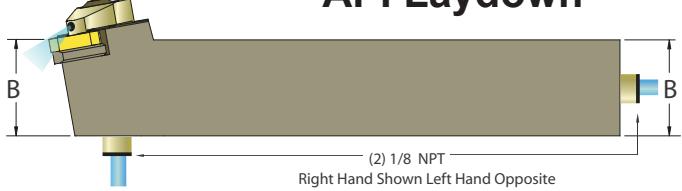ADLE R/L API Toolholder Style E- External Laydown API Laydown toolholder for Laydown inserts**API Laydown**

Right Hand Shown Left Hand Opposite




Inch Description	Part No. 733101-		A	B	C	E	F	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADLER/L16-T22API-D	53549	53550	1.25	1.00	6.00	1.50	1.25	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04
ADLER/L20-T22API-D	53551	53552	1.50	1.25	6.00	1.50	1.50							
ADLER/L24-T27API-F	53553	53554	1.75	1.50	8.00	1.75	1.75	27-Q60	VXE-27	TS-22M	JSLC-HP27N	JSCS-06	JSOR-07	JSOR-07
ADLER/L32-T27API-H	53555	53556	2.25	2.00	10.00	1.75	2.25							

One Low Pressure Quick Coolant Connector Kit is supplied standard. For low and high pressure coolant fitting see page 41. For spare parts see page 45.

AS-ADLN R/L API Boring Bar Style N- Internal Laydown API Laydown toolholder for Laydown inserts

Right Hand Shown, Left Hand Opposite

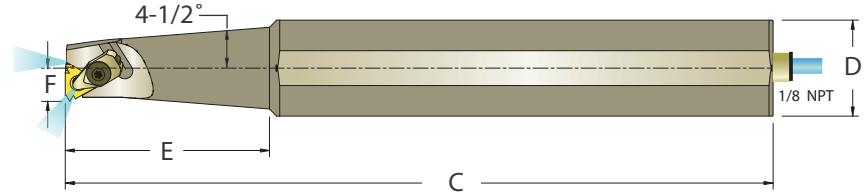API Laydown


Inch Description	Part No. 733101-		B	C	D	E	F	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-32T-ADLNR/L-22API	53559	53560	1.60	12.00	2.00	5.00	0.88	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40T-ADLNR/L-22API	53561	53562	1.60	12.00	2.50	5.00	0.88								
AS-32T-ADLNR/L-27API	53563	53564	1.60	12.00	2.00	5.00	0.90	27-Q60	VXE-27	TS-22M	JSLC-HP27N	JSCS-06	JSOR-07	JSOR-07	JSPN-M6
AS-40T-ADLNR/L-27API	53565	53566	1.60	12.00	2.50	5.00	0.90								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



Jet-Stream™ Toolholders METRIC



ADCLN R/L Toolholder Style L - Negative 5° end or side cutting lead angle for negative 80° diamond CNM_inserts

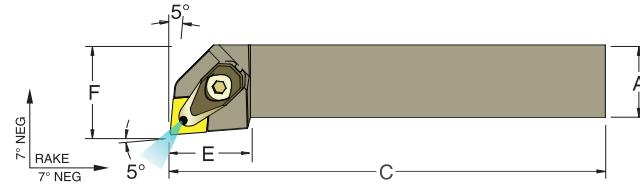

Metric Description	Part No. 733101-		A	B	C	E	F	CNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADCLNR/L-2020-K12	52828	52829	20	20	125	32	25	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-2525-M12	52830	52831	25	25	150	32	32	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-3232-P12	52832	52833	32	32	170	32	40	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-3232-P16	52834	52835	32	32	170	35	40	160612	ICSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-3232-P19	52826	52827	32	32	170	40	40	190612	ICSN-633	SM-M66	JSLC-HPC6	JSCS-06	JSOR-07	JSOR-07
ADCLNR/L-4040-S12	52836	52837	40	40	250	32	50	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADCLNR/L-4040-S16	52838	52839	40	40	250	35	50	160612	ICSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADCLNR/L-4040-S19	52840	52841	40	40	250	40	50	190612	ICSN-633	SM-M66	JSLC-HPC6	JSCS-06	JSOR-07	JSOR-07

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



ADDJN R/L Toolholder Style J - 3° side cutting lead angle for negative 55° diamond DNM_inserts

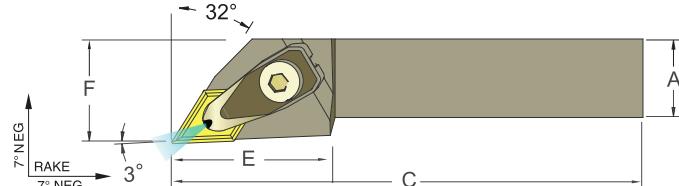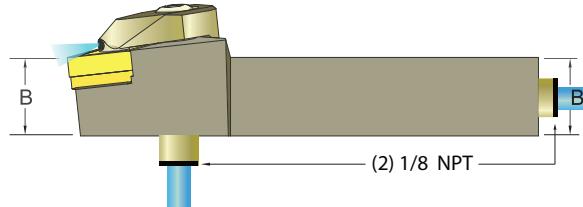

Metric Description	Part No. 733101-		A	B	C	E	F	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADDJNR/L-2020-K11	52842	52843	20	20	125	38	25	110408	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-2020-K15	52844	52845	20	20	125	38	25	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-2525-M15	52846	52847	25	25	150	38	32	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDJNR/L-3232-P15	52848	52849	32	32	170	38	38	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
*ADDJNR/L-4040-S15	52850	52851	40	40	250	38	50	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

ADDPNN Toolholder Style P - 27.5° side cutting lead angle for negative 55° diamond DNM_inserts

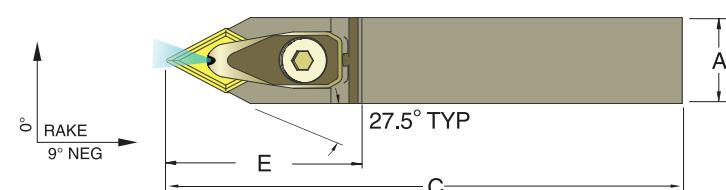
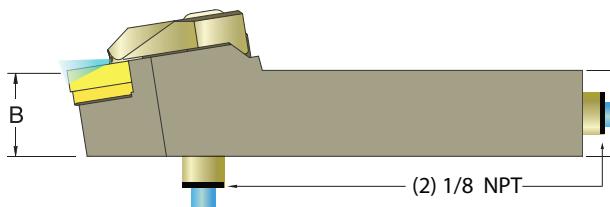


Metric Description	Part No. 733101-		A	B	C	E	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	Neutral												
ADDPNN-2020-K11	52854		20	20	125	44	110408	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDPNN-2020-K15	52855		20	20	125	44	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDPNN-2525-M11	52856		25	25	150	44	110408	S5511P	SM-M3	JSLC-HPD3	JSCS-04	JSOR-01	JSOR-04
ADDPNN-2525-M15	52857		25	25	150	44	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
ADDPNN-3232-P15	52858		32	32	170	44	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04
*ADDPNN-4040-S15	52859		40	40	250	44	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.





ADSDNN Toolholder Style D - 45° side cutting lead angle for negative square SNM_inserts

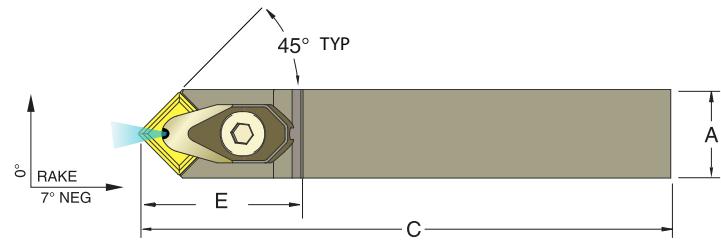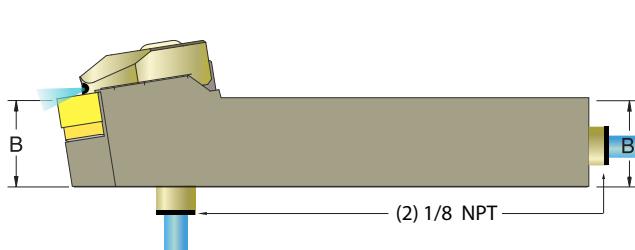

Metric Description	Part No. 733101-						SNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
		A	B	C	E	F							
ADSDNN-2525-M12	52872	25	25	150	35	20	120408	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSDNN-3232-P12	52873	32	32	170	35	25	120408	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSDNN-3232-P15	52874	32	32	170	35	25	150612	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADSDNN-4040-S15	52875	40	40	250	35	25	150612	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

ADSRN R/L Toolholder Style R - 15° side cutting lead angle for negative square SNM_inserts

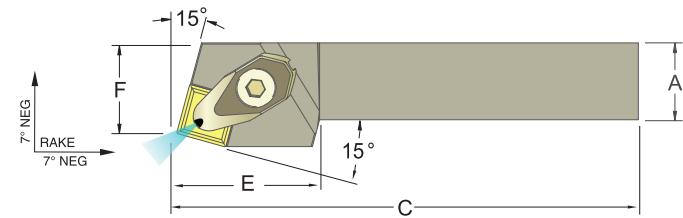
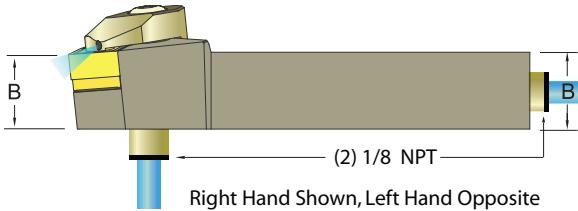


Right Hand Shown, Left Hand Opposite

Metric Description	Part No. 733101-							SNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.	A	B	C	E	F							
ADSRNR/L-2020-K12	52862	52863	20	20	125	35	21	120408	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSRNR/L-2525-M12	52864	52865	25	25	150	35	25	120408	S9012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADSRNR/L-3232-P15	52866	52867	32	32	170	35	25	150612	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04
*ADSRNR/L-4040-S15	52868	52869	40	40	250	40	25	150612	ISSN-533	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

ADTENN Neutral Toolholder Style E - 30° side cutting lead angle for negative triangle TNM_inserts

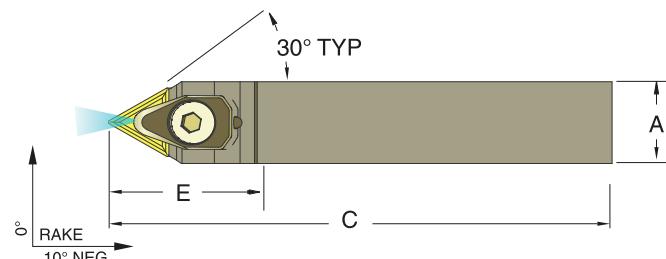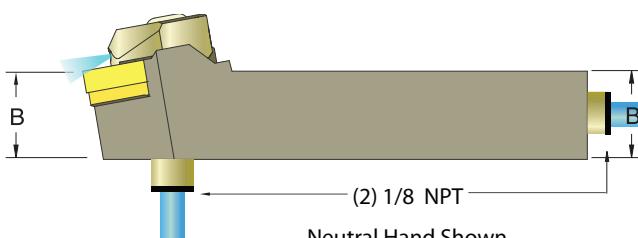

Neutral Hand Shown


Metric Description	Part No. 733101-					TNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
		A	B	C	E							
ADTENN-2020-K16	52892	20	20	125	35	160408	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTENN-2020-K22	52893	20	20	125	35	220408	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADTENN-2525-M16	52894	25	25	150	35	160408	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTENN-2525-M22	52895	25	25	150	35	220408	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
ADTENN-3232-P22	52896	32	32	170	40	220408	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04
*ADTENN-4040-S22	52897	40	40	250	40	220408	ITSN-433	SM-S4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.



Jet-Stream™ Toolholders METRIC


ADTJN R/L Toolholder Style J - 3° side cutting lead angle for negative triangle TNM_ inserts

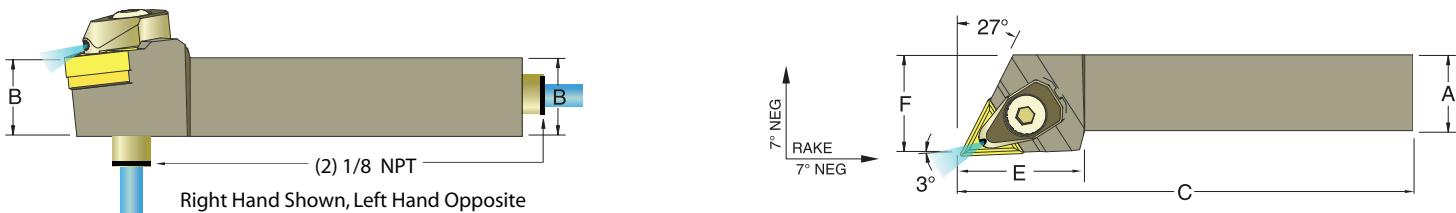

Metric Description	Part No. 733101-		A	B	C	E	F	TNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADTJNR/L-2020-K16	52878	52879	20	20	125	35	25	160408	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-2020-K22	52880	52881	20	20	125	32	32	220408	ITSN-433	SM-S4	JSLC-HPTCW-4N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-2525-M16	52882	52883	25	25	150	35	38	160408	ITSN-322	SM-M3	JSLC-HPTW3N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-2525-M22	52884	52885	25	25	150	35	50	220408	ITSN-433	SM-S4	JSLC-HPTCW-4N	JSCS-04	JSOR-01	JSOR-04
ADTJNR/L-3232-P22	52886	52887	32	32	170	32	50	220408	ITSN-433	SM-S4	JSLC-HPTCW-4N	JSCS-04	JSOR-01	JSOR-04
*ADTJNR/L-4040-S22	52888	25889	40	40	250	35	50	220408	ITSN-433	SM-S4	JSLC-HPTCW-4N	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.


ADVJN R/L Toolholder Style J - Negative 3° side cutting lead angle for negative 35° diamond VNM_inserts

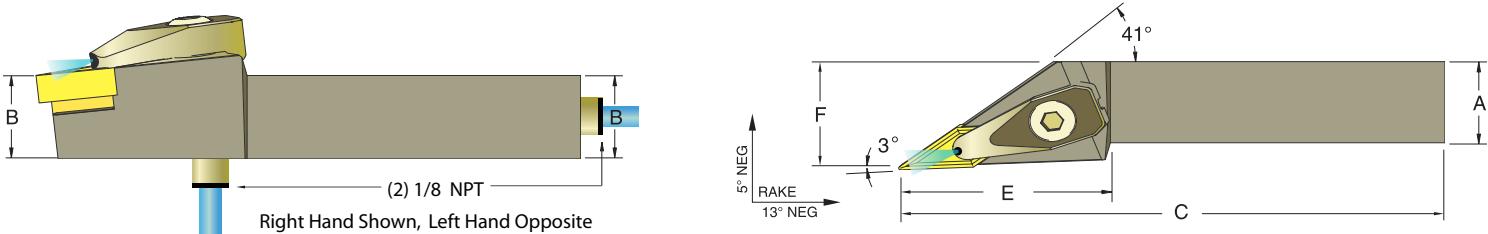

Metric Description	Part No. 733101-		A	B	C	E	F	VNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADVJNR/L-2020-K16	52900	52901	20	20	125	45	25	160408	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04
ADVJNR/L-2525-M16	52902	52903	25	25	150	45	32	160408	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04
ADVJNR/L-3232-P16	52904	52905	32	32	170	45	38	160408	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04


One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

ADWLN R/L Toolholder Style L - Negative 5° end or side cutting lead angle for negative 80° trigon WNM_inserts

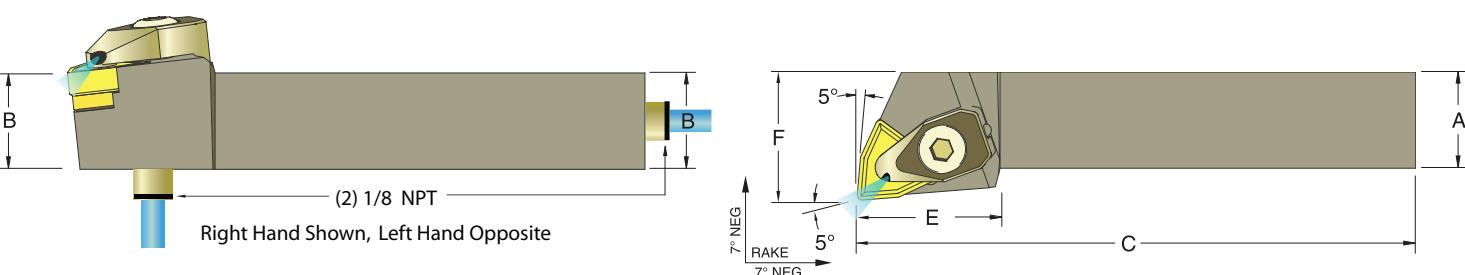


Metric Description	Part No. 733101-		A	B	C	E	F	WNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADWLNR/L-2020-K06	52909	52910	20	20	125	25	25	060408	IWSN-322	SM-M3	JSLC-HPTW3R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-2020-K08	52911	52912	20	20	125	25	25	080408	S8008P	SM-M4	JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-2525-M06	52913	52914	25	25	150	25	25	060408	IWSN-322	SM-M3	JSLC-HPTW3R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-2525-M08	52915	52916	25	25	150	25	25	080408	S8008P	SM-M4	JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
ADWLNR/L-3232-P08	52917	52918	32	32	170	25	25	080408	S8008P	SM-M4	JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04
*ADWLNR/L-4040-S08	52919	52920	40	40	250	25	25	080408	S8008P	SM-M4	JSLC-HPTW4R/L	JSCS-04	JSOR-01	JSOR-04

*Special Order, available upon request. One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

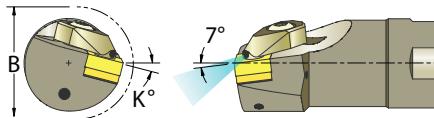
**AS-ADCLN R/L Boring Bar Style L - Negative 5° side & end cutting edge angle for negative 80° diamond CNM_inserts**

Right Hand Shown, Left Hand Opposite

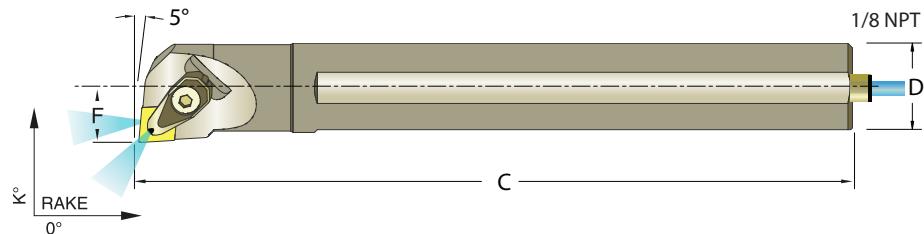


Metric Description	Part No. 733101-		B	C	D	F	K°	CNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20R-ADCLNR/L-09	52925	52926	25	200	20	13	10°	090308	N/A	N/A	JSLC-HPC3-B	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-25R-ADCLNR/L-12	52927	52928	32	200	25	17	14°	120408	N/A	N/A	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32S-ADCLNR/L-12	52929	52930	40	250	32	22	14°	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40S-ADCLNR/L-12	52931	52932	45.	250	40	27	11°	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-50T-ADCLNR/L-12	52933	52934	65	300	50	35	11°	120408	S8012P	SM-M4	JSLC-HPCTW-4N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-50T-ADCLNR/L-16	52935	52936	65	300	50	35	11°	120408	S8016P	SM-M6	JSLC-HPC5	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

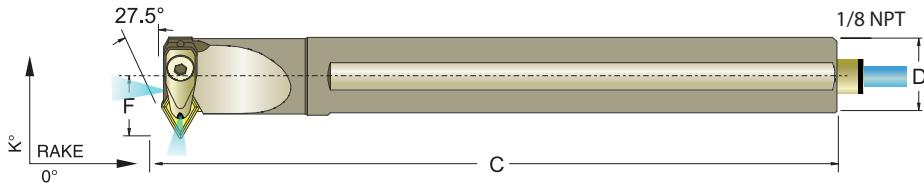
AS-ADDPN R/L Boring Bar Style P- Negative 27.5° end cutting edge angle for negative 55° diamond DNM_inserts

Metric Description	Part No. 733101-		B	C	D	F	K°	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-32S-ADDPNR/L-15	52939	52940	39	250	32	19	13°	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40S-ADDPNR/L-15	52941	52942	42	250	40	25	10°	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.


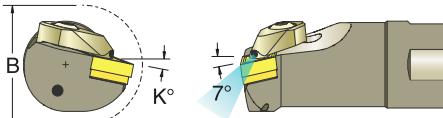
AS-ADDUN R/L Boring Bar Style U - Negative 3° end cutting edge angle for negative 55° diamond DNM_inserts

Right Hand Shown, Left Hand Opposite


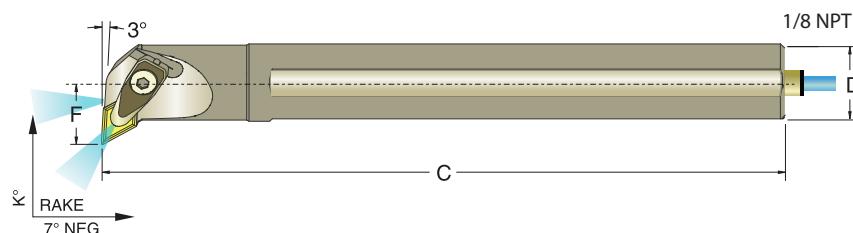


Metric Description	Part No. 733101-		B	C	D	F	K°	DNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-25R-ADDUNR/L-11	52946	52947	33	200	25	19	11°	110408	S5511P	SM-M3	JSLC-HPDT3R/L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-32S-ADDUNR/L-15	52948	52949	50	250	32	25	11°	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40S-ADDUNR/L-15	52950	52951	57	250	40	28	11°	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-50T-ADDUNR/L-15	52952	52953	76	300	50	35	11°	150608	IDSN-423	SM-S4	JSLC-HPD4	JSCS-04	JSOR-01	JSOR-04	JSPN-M6



One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

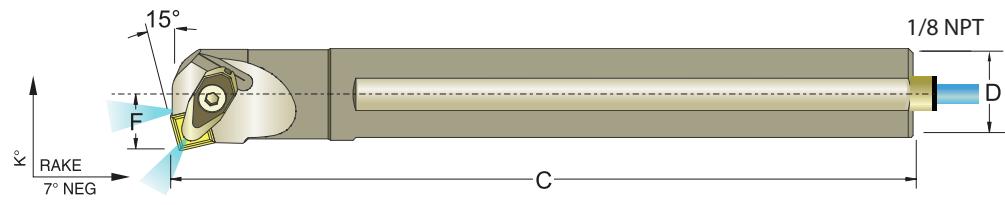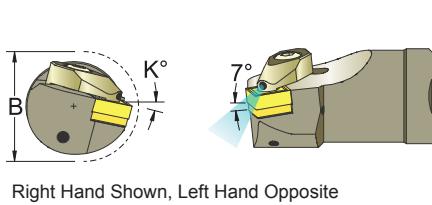**AS-ADSKN R/L Boring Bar Style K - 15° End cutting edge angle for negative square SNM_inserts**

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

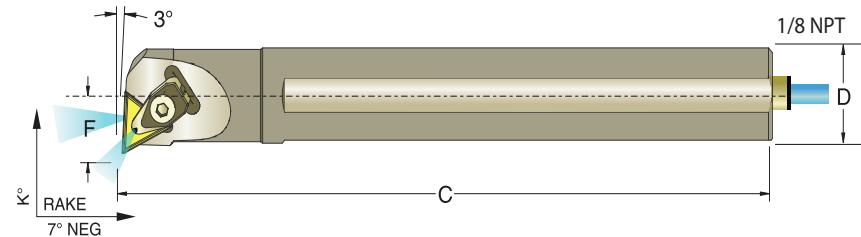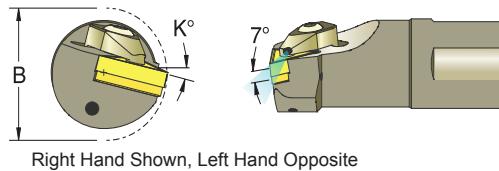
AS-ADTUN R/L Boring Bar Style U - Negative 3° end cutting edge angle for negative triangle TNM_inserts

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

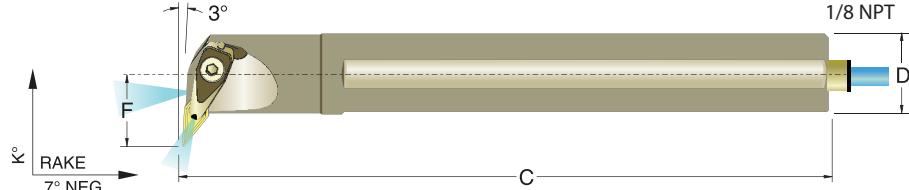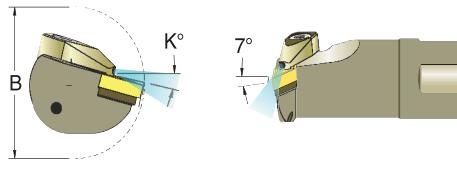
AS-ADVUN R/L Boring Bar Style U - Negative 3° side cutting edge angle for negative 35° diamond VNM_inserts

Metric Description	Part No. 733101-		B	C	D	F	K°	VNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
R.H.	L.H.														
AS-32R-ADVUNR/L-16	52980	52981	58	200	32	28	14°	160408	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40S-ADVUNR/L-16	52982	52983	64	250	40	32	11°	160408	S3516P	SM-M3	JSLC-HPV3	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

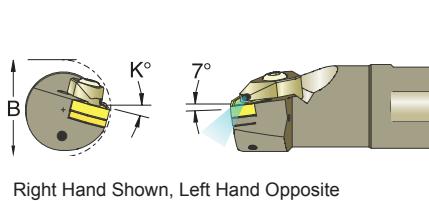**AS-ADWLN R/L Boring Bar Style L - Negative 5° end & side cutting edge angle for negative 80° trigon WNM_inserts**


Right Hand Shown, Left Hand Opposite

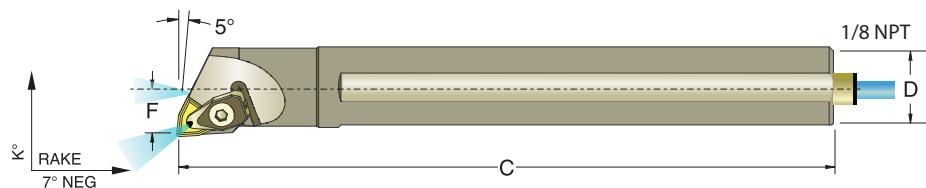


Right Hand Shown, Left Hand Opposite

Metric Description	Part No. 733101-		B	C	D	F	K°	WNM_Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20R-ADWLR/L-06	52986	52987	26	200	20	13	14°	60408	N/A	N/A	JSLC-HPW3-B	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-25R-ADWLR/L-08	52988	52989	33	200	25	17	14°	80408	S8008P	SM-M4	JSLC-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-32S-ADWLR/L-08	52990	52991	38	250	32	22	14°	80408	S8008P	SM-M4	JSLC-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-40S-ADWLR/L-08	52992	52993	46	250	40	27	11°	80408	S8008P	SM-M4	JSLC-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-50T-ADWLR/L-08	52994	52995	51	300	50	32	12°	80408	S8008P	SM-M4	JSLC-HPTW-4R/L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

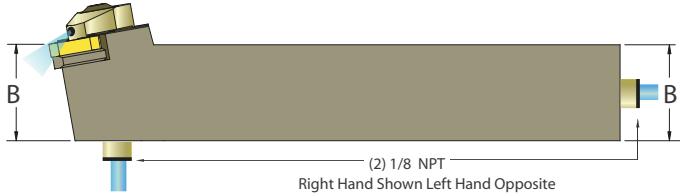ADLE R/L Toolholder Style E- Laydown toolholder for Laydown inserts


Right Hand Shown Left Hand Opposite

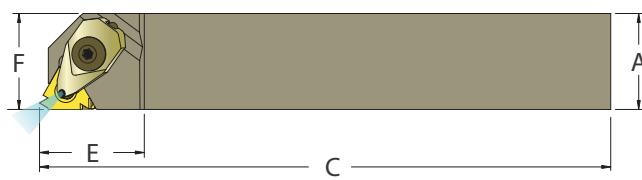

Metric Description	Part No. 733101-		A	B	C	E	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADLER/L2020-16K	53575	53576	20	20	125	32	20	16-G60	GXE-16	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06
ADLER/L2525-16M	53577	53578	25	25	150	32	25							

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand toolholder use a right hand clamp and Left hand toolholder use a left hand clamp.

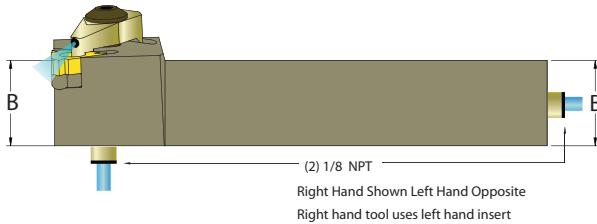ADLEG R/L Toolholder Style EG- Gang tool post for Laydown inserts

Right Hand Shown Left Hand Opposite

Right hand tool uses left hand insert
Left hand tool uses right hand insert

Metric Description	Part No. 733101-		A	B	C	E	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADLEGR/L2020-16K	53581	53582	20	20	125	32	25	16-G60	GXE-16	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06
ADLEGR/L2525-16M	53583	53584	25	25	150	32	32							


One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand toolholder use a left hand clamp and Left hand toolholder use a right hand clamp.



Jet-Stream™ Toolholders METRIC

ADLE R/L Qualified Toolholder Style E - Offset head for Laydown inserts

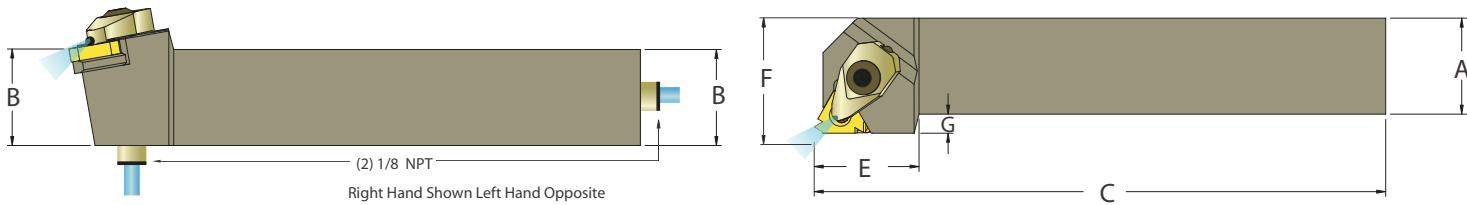


Metric Description	Part No. 733101-		A	B	C	E	F	G	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	
	R.H.	L.H.														
ADLER/L2020-16Q-K	53587	53588	20	20	125	32	25	5								
ADLER/L2525-16Q-M	53589	53590	25	25	150	32	32	7	16-G60	GXE-16	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06	
ADLER/L3232-16Q-M	53591	53592	32	32	150	32	40	8								
ADLER/L2525-22Q-M	53593	53594	25	25	150	38	32	7	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04	
ADLER/L3232-22Q-P	53595	53596	32	32	170	38	40	8								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand toolholder use a left hand clamp and Left hand toolholder use a right hand clamp.

AS-ADLN R/L Boring Bar Style N - Internal Laydown bar for Laydown threading

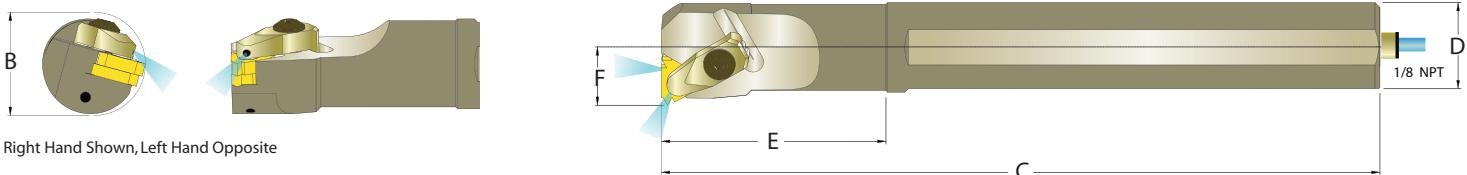


Metric Description	Part No. 733101-		B	C	D	E	F	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-20R-ADLNR/L-16	53600	53601	28	200	20	51	13								
AS-25R-ADLNR/L-16	53602	53603	35	200	25	64	17	16-G60	GXE-16	TS 3.5-7M1	*JSLC-HP16R *JSLC-HP16L	JSCS-03	JSOR-03	JSOR-06	JSPN-M3
AS-32S-ADLNR/L-16	53604	53605	41	250	32	64	19								
AS-40S-ADLNR/L-16	53606	53607	47	250	40	64	23								
AS-32S-ADLNR/L-22	53608	53609	44	250	32	64	21								
AS-40S-ADLNR/L-22	53610	53611	51	250	40	64	25	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-50T-ADLNR/L-22	53612	53613	64	300	50	64	31								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

*Right hand toolholder use a left hand clamp and Left hand toolholder use a right hand clamp.

ADLE R/L API Toolholder Style E- External Laydown API Laydown toolholder for Laydown inserts

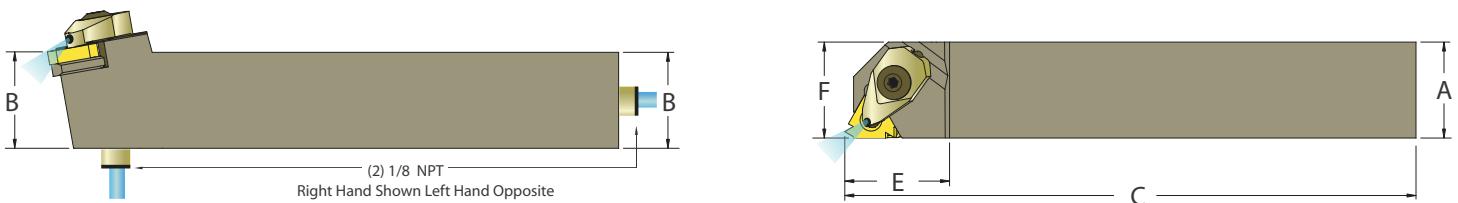


Metric Description	Part No. 733101-		A	B	C	E	F	Gage Insert	Seat	Insert Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring
	R.H.	L.H.												
ADLER/L2525-T22API-M	53614	53615	25	25	150	38	32							
ADLER/L3232-T22API-M	53616	53617	32	32	150	38	40	22-N60	NXE-22	TS-22M	JSLC-HP22N	JSCS-04	JSOR-01	JSOR-04
ADLER/L4040-T27API-R	53618	53619	40	40	200	45	50	27-Q60	VXE-27	TS-27M	JSLC-HP27N	JSCS-06	JSOR-07	JSOR-07
ADLER/L5050-T27API-S	53620	53621	50	50	250	45	60							

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.




AS-ADLN R/L API Boring Bar Style N- Internal Laydown API Laydown toolholder for Laydown inserts

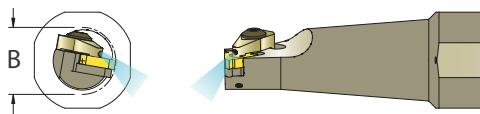

Right Hand Shown, Left Hand Opposite

API Laydown

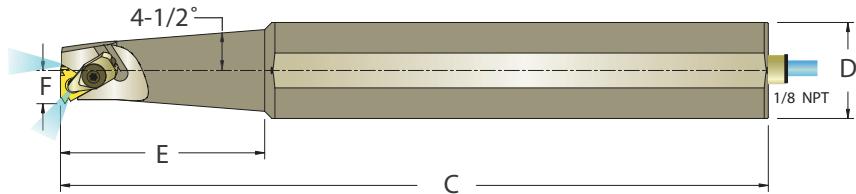

Metric Description	Part No. 733101-		B	C	D	E	F	Gage Insert	Seat	Seat Screw	Dor-Lock Clamp	Clamp Screw	Upper 'O' Ring	Lower 'O' Ring	Chip Flush Plug
	R.H.	L.H.													
AS-50T-ADLNR/L-22API	53624	53625	41	300	50	125	22	22-N60	NX-22-1	TS 4.7-10M1	JSLC-HP22R JSLC-HP22L	JSCS-04	JSOR-01	JSOR-04	JSPN-M6
AS-60T-ADLNR/L-22API	53626	53627	41	300	60	125	22								
AS-50T-ADLNR/L-27API	53628	53629	41	300	50	125	23	27-Q60	VX-27-1	TS 5.8-10M1	JSLC-HP27R JSLC-HP27L	JSCS-06	JSOR-07	JSOR-07	JSPN-M6
AS-60T-ADLNR/L-27API	53630	53631	41	300	60	125	23								

One standard coolant connector kit with tubing is supplied, see pg 41 for details and high pressure coolant fitting. For spare parts see page 45.

Coolant Connector Kits Available for Both Standard and High Pressure Applications

up to 400 psi (16 bar)
Standard Coolant Connector Kits with Tubing

Includes: (1) Tubing and (2) Male Connector

Stabdard Connector Kits		Plug	Male Connector	Tubing	Male Connector	Threading	Coolant Flow
Description	Part No.	1/8" NPT		12" Long, 1/4" O.D.		NPT	I.D.
JSLPCK-062-250	53303	JSNP-T125	JS-MC125-250	JS-T250-1200	JS-MC062-250	1/16"	
*JSLPCK-125-250	53304	JSNP-T125	JS-MC125-250	JS-T250-1200	JS-MC125-250	1/8"	
JSLPCK-250-250	53305	JSNP-T125	JS-MC125-250	JS-T250-1200	JS-MC250-250	1/4"	3/16"

*JSLPCK-125-250 is Supplied standard with all Jet-Stream™ Toolholders and Boring Bars.

Over 400 psi (16 bar)
High Pressure Coolant Connector Kits with Copper Tubing

Includes: (1) 90° Swivel Elbow (1) Copper Tubing and (1) Make Connector

High Pressure Connector Kits		90° Swivel Elbow	Copper Tubing	Male Connector	Threading	Coolant Flow
Description	Part No.		12" Long, 1/4" O.D.		NPT	I.D.
JSHPCK-125-250	53371	JSHP-MC125-250	JSHP-CT250-1200	JSHP-MC125-250	1/8"	
JSHPCK-250-250	53372	JSHP-MC125-250	JSHP-CT250-1200	JSHP-MC250-250	1/4"	1/4"








Note: For machines that have turrets with 1/8 NPT tapped coolant holes, you do not need a ball type coolant nozzle . Ball type coolant nozzles are sold seperately.

Ball-Type Coolant Nozzles Sold Separately	Acetal Material	Brass Material	Ball-Type Coolant Nozzles Size		Acetal Material		Brass Material	
			Desc.	UPC NO. 733101-	Desc.	UPC NO. 733101-	Desc.	UPC NO. 733101-
			12mm OD, 1/8NPT ID	JSCNA-12	53354	JSCNB-12	53365	
			14mm OD, 1/8NPT ID	JSCNA-14	53355	JSCNB-14	53366	
			15mm OD, 1/8NPT ID	JSCNA-15	53356	JSCNB-15	53367	
			22mm OD, 1/8NPT ID	JSCNA-22	53357	JSCNB-22	53368	
			1/2" OD, 1/8NPT ID	JSCNA-50	53358	JSCNB-50	53369	
			5/8" OD, 1/8NPT ID	JSCNA-62	53359	JSCNB-62	53370	



Negative Turning Inserts

Please call to check availability of Inserts.

Material To Be Machined		Finishing	General Purpose	Roughing
Free Cutting Steel, Low Carbon Steel, Alloy Carbon Steel, Tool Steel, Under 35HRC Ferretic Stainless Steel 400		 PF Chip Breaker	 PM Chip Breaker	 PR Chip Breaker
Note: Cutting information provided is for reference only. Actual cutting data will be determined in the application.	Turning Application VC sfm Feed Rate-rev Depth of Cut Condition Industry standard Insert Grade Insert Coating	Finishing High 330"-885" 120-270mm .002"-.012" 0.1-0.3mm .002"-.040" .01-1mm Wet (A.N.S.I. - C6-C7) (I.S.O. - P10-P25) CVD-TiN-TiCN-AL ₂ O ₃ -TiNB	General Purpose Medium 330"-750" 100-230mm .008"-.016" 0.2-0.4mm .008"-.020" .01-3.0mm Wet (A.N.S.I. - C5-C6) (I.S.O. - P20-P35) CVD-TiN-TiCN-AL ₂ O ₃ -TiNB	Roughing Low 200"-600" 70-180mm .012"-.020" 0.3-0.5mm .040"-.200" 2.0-5.0mm Wet (A.N.S.I. - C5) (I.S.O. - P25-P45) CVD-TiN-TiCN-AL ₂ O ₃ -TiNB
	Insert Grade Specifications	CVD Multi-Layer wear resistant coating with a hard cobalt enriched substrate best for high edge wear resistance. For precision turning operation at high sfm.	CVD Multi-Layer wear resistant coating with a hard and tough cobalt enriched substrate best for resistance to both mechanical and thermal shock. For finishing to medium turning operation at medium sfm.	CVD Multi-Layer wear resistant coating with a tough cobalt enriched substrate for high resistance to both mechanical and thermal shock. For medium to roughing operation at low sfm.
	Insert Aptitude	High sfm Wear Resistant DHCP15	Medium DHCP25	Low sfm Toughness DHCP35
Insert Geometry	ANSI	ISO	Chip Breaker	UPC No. 733101- UPC No. 733101- UPC No. 733101-
 CNMG-PF/PM/PR	CNMG-321-	CNMG-090304-	PM	70356
	CNMG-322-	CNMG-090308-	PM	70360
	CNMG-431-	CNMG-120404-	PF	*70237
	CNMG-431-	CNMG-120404-	PM	70364
	CNMG-432-	CNMG-120408-	PF	*70242
 DNMG-PF/PM/PR	CNMG-432-	CNMG-120408-	PM	70368
	CNMG-432-	CNMG-120408-	PR	70472
	CNMG-433-	CNMG-120412-	PM	70372
	CNMG-433-	CNMG-120412-	PR	70478
	CNMG-542-	CNMG-160608-	PR	70369
 SNMG-PF/PM/PR	CNMG-542-	CNMG-160612-	PM	70473
	CNMG-543-	CNMG-160612-	PR	70479
	CNMG-643-	CNMG-190612-	PR	*70487
	CNMG-643-	CNMG-190612-	PR	70496
	DNMG-331-	DNMG-110404-	PF	*70251
 TNMG-PF/PM/PR	DNMG-332-	DNMG-110408-	PM	70380
	DNMG-431-	DNMG-150404-	PF	*70261
	DNMG-431-	DNMG-150404-	PM	70385
	DNMG-432-	DNMG-150408-	PM	70389
	DNMG-432-	DNMG-150408-	PR	70390
 VNMG-PF/PM/PR	DNMG-442-	DNMG-150608-	PF	*70269
	DNMG-442-	DNMG-150608-	PM	70397
	DNMG-442-	DNMG-150608-	PR	70515
	DNMG-443-	DNMG-150612-	PR	70521
	SNMG-432-	SNMG-120408-	PM	70409
 WNMG-PF/PM/PR	SNMG-433-	SNMG-120412-	PR	70531
	SNMG-543-	SNMG-150612-	PR	70540
	SNMG-643-	SNMG-190612-	PR	70549
	SNMG-644-	SNMG-190616-	PR	70553
	TNMG-331-	TNMG-160404-	PF	*70297
 VNMG-PF/PM/PR	TNMG-332-	TNMG-160408-	PM	70421
	TNMG-332-	TNMG-160408-	PR	70556
	TNMG-431-	TNMG-220404-	PF	*70307
	TNMG-432-	TNMG-220408-	PM	70433
	TNMG-432-	TNMG-220408-	PR	70565
 WNMG-PF/PM/PR	TNMG-433-	TNMG-220412-	PR	70570
	VNMG-331-	VNMG-160404-	PF	*70315
	VNMG-331-	VNMG-160404-	PM	70437
	VNMG-332-	VNMG-160408-	PM	70441
	WNMG-331-	WNMG 060404-	PF	*70324
 WNMG-PF/PM/PR	WNMG-332-	WNMG 060408-	PM	70449
	WNMG-431-	WNMG 080404-	PF	*70338
	WNMG-432-	WNMG 080408-	PM	70461
	WNMG-432-	WNMG 080408-	PR	70586
*NOT A Stock Item. Please Call for more information.				




Negative Turning Inserts


Please call to check availability of Inserts.

Material To Be Machined
Manganese, Uranium, Zirconium, Copper, Brass, Bronze, Lead Alloy, Tin Alloy, Tungsten Alloy, Nylon, Plastic, Rubber, Graphite, Phenolic


Finishing



Chip Breaker



Finishing to Light Roughing



Chip Breaker

Note: Cutting information provided is for reference only. Actual cutting data will be determined in the application.	Turning Application VC sfm Feed Rate-rev Depth of Cut Condition Industry standard Insert Grade Insert Coating	Finishing		General Purpose		Light Roughing	
		Very High 200"-2600" .002"-.010" .002"-.080" Dry-Wet (A.N.S.I. - C3-C4) (I.S.O. - S01-S15) PVD-AlCrN Multi-Layer	High 150"-1850" .002"-.012" .002"-.100" Wet (A.N.S.I. - C2-C3) (I.S.O. - S05-S25) PVD-TiN+TiAlN+TiN Multi-Layer	Med-High 100"-1350" .004"-.016" .002"-.120" Toughness DHK425F	Med-High 100"-1350" .004"-.016" .002"-.120" Toughness DHK425F		
	Insert Grade Specifications Insert Coating	Ultra fine and hard micro-grained substrate with hard coating, enhancing sliding wear, load capacity with high lubricity to avoid edge built up. For precision turning operation at high sfm.		Hard and tough micro-grained substrate, PVD coating, TiN over TiAlN for hard and edge wear resistance and lubricity for general turning application. For finishing to medium turning operation at medium sfm.		Tough and Hard micro-grained substrate PVD TiAlN . For medium to light roughing operation at low sfm.	
	Insert Aptitude	High sfm Wear Resistant DKAT10V		Medium DASK25B		Low sfm Toughness DHK425F	
Insert Geometry	ANSI	ISO	Chip Breaker	UPC No. 733101-	UPC No. 733101-	UPC No. 733101-	
CNGP-XF	CNGP-430.5	CNGP-120402-FN/EN	XF	69508	69509		
	CNGP-431-	CNGP-120404-EN	XF	69520	69521		
	CNGP-432-	CNGP-120408-EN	XF		69533		
DNGP-XF	DNGP-431-	DNGP-150404-FN	XF	69550			
	DNGP-432-	DNGP-150408-EN	XF		*69567		
VNGP-XF	VNGP-330.5-	VNGP-160402-FN	XF	69574			
	VNGP-331-	VNGP-160404-FN	XF	69583			
	VNGP-332-	VNGP-160408-EN	XF		*69589		

Super Precision Ground


CNMP- MP	CNMP-431-	CNMP-120404-	MP	69619		
	CNMP-432-	CNMP-120408-	MP		*69630	*69631
DNMP- MP	DNMP-331-	DNMP-110404-	MP	*69643		
	DNMP-332-	DNMP-110408-	MP		*69655	*69656
VNMP- MP	DNMP-431-	DNMP-150404-	MP	*69658		
	DNMP-432-	DNMP-150408-	MP		*69660	*69661
VNMP- MP	DNMP-441-	DNMP-150604-	MP	69663		
	DNMP-442-	DNMP-150608-	MP		*69666	*69667
WNMP- MP	VNMP-331-	VNMP-160404-	MP	69691*		
	VNMP-332-	VNMP-160408-	MP		69693*	69694*
WNMP- MP	WNMP-331-	WNMP-060404-	MP	69698		
	WNMP-332-	WNMP-060408-	MP		*69707	*69708
	WNMP-431-	WNMP-080404-	MP	69711		
	WNMP-432-	WNMP-080408-	MP		*69723	*69724

*NOT A Stock Item. Please Call for more information.




Threading Inserts

On Edge



Material Application	First Choice for ➤ General Purpose		General Purpose		High Performance		Insert Dimensions	
	Non Ferrous		Ferrous		Ferrous & Non Ferrous			
	Stainless Steel, Cast Iron, Aluminum & H.T.A.		Carbon Steel, Alloy Steel & Stainless Steel		Carbon Steel, Alloy Steel & Stainless Steel, Cast Iron, Aluminum & H.T.A.			
Dorian Insert Grade	DVK10		DVP656		DASK25B			
Description	UPC No 733101-							
TNMA-TNMC NV 60°	TNMA	TNMC	TNMA	TNMC	TNMA	TNMC	I.C. Thick Hole Dia. Rad. TPI	
Threading Negative Rake	TNMA-32NV	TNMC-32NV	72529	72004	72528	72003	72530 72005 .375 .125 150 .003 .005 8-36	
	TNMA-43NV	TNMC-43NV	72536	72008	72535	72010	72537 72011 .500 .187 .203 .003 .005 5-24	
	TNMA-54NV	TNMC-54NV	72557	72032	72556	72031	72558 72033 .625 .250 .250 .008 .010 4-20	
TPMA-TPMC NV 60°	TPMA	TPMC	TPMA	TPMC	TPMA	TPMC	I.C. Thick Hole Dia. Rad. TPI	
Threading 5° Positive Rake	TPMA-32NV	TPMC-32NV	73394	73056	73393	73055	73395 73057 .375 .125 .150 .003 .005 8-36	
	TPMA-43NV	TPMC-43NV	73401	73063	73400	73062	73402 73064 .500 .187 .203 .003 .005 5-24	
	TPMA-54NV	TPMC-54NV	73415	73077	73414	73076	73416 73078 .625 .250 .250 .008 .010 4-20	

Laydown



Material Application	First Choice for ➤ General Purpose		General Purpose		Insert Dimensions	Pitch		
	Ferrous & Non Ferrous		Ferrous					
	Carbon Steel, Alloy Steel & Stainless Steel , Cast Iron, Aluminum & H.T.A.		Carbon Steel, Alloy Steel & Stainless Steel					
Dorian Insert Grade	DVK10		DVP656					
Description	UPC No. 733101-							
60° Partial Profile	External Right	External Left	External Right	External Left	I.C. L X Y	TPI mm		
External Threading	11ER-A60	11EL-A60	74001	74005	74000 74004 .250 11 0,8 0,9	16-48 0,5-1,5		
	16ER-A60	16EL-A60	74009	74013	74008 74012 .375 16 0,8 0,9	16-48 0,5-1,5		
	16ER-G60	16EL-G60	74017	74021	74016 74020 .375 16 1,2 1,7	8-14 1,75-3,0		
	16ER-AG60	16EL-AG60	74025	74029	74024 74028 .375 16 1,2 1,7	8-48 0,5-3,0		
	22ER-N60	22EL-N60	74033	74037	74032 74036 .500 22 1,7 2,5	5-7 3,5-5,0		
60° Partial Profile	Internal Right	Internal Left	Internal Right	Internal Left	I.C. L X Y	TPI MM		
Internal Threading	06IR-A60	06IL-A60	74113	74117	74115 74119 .156 6,9 0,6 0,6	16-48 0,5-1,5		
	08IR-A60	08IL-A60	74121	74125	74123 74127 .187 8,7 0,6 0,7	16-48 0,5-1,5		
	11IR-A60	11IL-A60	74057	74061	74056 74060 .250 11 0,8 0,9	16-48 0,5-1,5		
	16IR-A60	16IL-A60	74065	74069	74064 74068 .375 16 0,8 0,9	16-48 0,5-1,5		
	16IR-G60	16IL-G60	74073	74077	74072 74076 .375 16 1,2 1,7	8-14 1,75-3,0		
	16IR-AG60	16IL-AG60	74081	74085	74080 74084 .375 16 1,2 1,7	8-48 0,5-3,0		
	22IR-N60	22IL-N60	74089	74093	74088 74092 .500 22 1,7 2,5	5-7 3,5-5,0		

DorNotch



Material Application	First Choice for ➤ General Purpose		General Purpose		High Performance		Insert Dimensions	Pitch		
	Non Ferrous		Ferrous		Ferrous & Non Ferrous					
	Stainless Steel, Cast Iron, Aluminum & H.T.A.		Carbon Steel, Alloy Steel & Stainless Steel		Carbon Steel, Alloy Steel & Stainless Steel , Cast Iron, Aluminum & H.T.A.					
Dorian Insert Grade	DVK10		DVP656		DASK25B					
Description	UPC No.733101-									
V Thread NT- 60°	NT Right	NT Left	NT Right	NT Left	NT Right	NT Left	Gage Dia. A B E R T	EXT. INT. EXT. INT.		
Partial Profile Negative Rake Angle	NT-2R	NT-2L	82901	82905	82900 82904	82902 82906	.1875 .219 .2661 .075 .003 .005 .150	8-36 7-20 0,70 3		
	NT-3R	NT-3L	82909	82913	82908 82912	82910 82914	.3750 .344 .3999 .098 .005 .008 .195	6-20 5-12 1,25 4		
	NT-4R	NT-4L	82917	82921	82916 82920	82918 82922	.5000 .453 .6239 .128 .005 .008 .255	4-20 4-12 1,00 4		
V Thread NTP- 60°	NTP Right	NTP Left	NTP Right	NTP Left	NTP Right	NTP Left	Gage Dia. A B E R T	EXT. INT. EXT. INT.		
Partial Profile Positive Rake Angle	NTP-2R	NTP-2L	82925	82929	82924 82928	82926 82930	.1875 .219 .2661 .075 .003 .005 .150	8-36 7-20 0,70 3		
	NTP-3R	NTP-3L	82933	82937	82932 82936	82934 82938	.3750 .344 .3999 .098 .005 .008 .195	6-20 5-12 1,25 4		
	NTP-4R	NTP-4L	82941	82945	82940 82944	82942 82946	.5000 .453 .6239 .128 .005 .008 .255	4-20 4-12 1,00 4		

Please call for availability on Inserts.



*Dor-Lock turning and threading **clamp sets** include **upper and lower o-rings**.

Jet-Stream™ Turning

Turning Spare Parts				
	Description	Inch I.C.	Metric Length	Part No.
Seats				733101-
80° Diamond	S8012P	1/2"	12mm	53291
	ICSN-533	5/8"	16mm	90010
	ICSN-633	3/4"	19mm	90012
55° Diamond	S5511P	3/8"	11mm	53293
	IDSN-423	1/2"	15mm	90018
	IDSN-433	1/2"	15mm	90021
35° Diamond	S3516P	3/8"	12mm	53299
	S9012P	1/2"	16mm	53295
	ISSN-533	5/8"	11mm	90060
Square				733101-
	ITSN-322	3/8"	22mm	90084
	ITSN433	1/2"	16mm	90093
Triangle	IWSN-322	3/8"	06mm	90070
	S8008P	1/2"	08mm	53301
Trigon				733101-
	SM-M3			53318
	SM-M4			53319
Seat Screw				733101-
	SM-M6			53320
	M-M66			53317
Clamp Screw				733101-
	SM-S4			53316
	JSCS-03			53323
Boring Bar Chip Flush Plug	JSCS-04			53324
	JSCS-06			53326
	JSCS-04-HPV			53321
Chip Flush Nozzle	JSPN-M6			53334
	JSPN-M3			53339
Alignment Pin	JSFN-M6			53313
	JSCAP-01			53325
Upper 'O' Ring Seal	JSOR-03			53328
	JSOR-01			53315
Lower 'O' Ring Seal	JSOR-07			53327
	JSOR-06			53330
	JSOR-04			53314

Turning Dor-Lock Clamp Sets*		
CNMG Insert Style	Description	Part No.
	JSLC-HPC3-B	53250
	JSLC-HPCTW-4N	53289
	JSLC-HPC5	53252
	JSLC-HPC6	53248
DNMG Insert Style	Description	Part No.
	JSLC-HPD3	53253
	JSLC-HPD4	53254
DNMG & TNMG Insert Style	Description	Part No.
	JSLC-HPDT3-BR	53268
	JSLC-HPDT3-BL	53269
TNMG & WNMG Insert Style	Description	Part No.
	JSLC-HPTW3N	53261
	JSLC-HPTW3R	53262
	JSLC-HPTW3L	53263
	JSLC-HPCTW-4N	53289
	JSLC-HPTW4R	53265
	JSLC-HPTW4L	53266
WNMG Insert Style	Description	Part No.
	JSLC-HPW3-B	53270
VNMG Insert Style	Description	Part No.
	JSLC-HPV3	53267

NEW High Volume Turning Dor-Lock Clamp		
Insert Style	Description	Part No.
CNMG / TNMG / WNMG	JSLC-HPCTW-4N-HPV	53290
Jet-Stream™ Threading		
Threading (DorNotch) Dor-Lock Clamp Sets*		
NT & NTP 60° Insert Style	Description	Part No.
	JSLC-HP72	53350
	JSLC-HP73	53351
	JSLC-HP76	53352
	JSLC-HP77	53353
Threading (Laydown) Dor-Lock Clamp Sets*		
60° Partial Profile Insert Style	Description	Part No.
	JSLC-HP16R	53230
	JSLC-HP16L	53231
	JSLC-HP22R	53232
	JSLC-HP22L	53233
	JSLC-HP27R	53234
	JSLC-HP27L	53235
Threading Spare Parts		
Seats	Description	Part No.
	SM-420	90400
	GXE-16	92070
	NXE-22	92072
	VXE-27	92076
Seat Screw	Description	Part No.
	TS 3.5-7M1	90971
	TS 4.7-10M1	90982
	TS 5.8-10M1	90986
	SL-344	91008
Torx Screw	GTS-1	90965
	GTS-2	90966
Torx Keys	GTS-3	90967
	T-10	92005
	T20	92007
Clamp Screw	JSCS-03	53323
	JSCS-04	53324
	JSCS-06	53326
Boring Bar Chip Flush Plug	JSPN-M6	53334
	JSPN-M3	53339
Chip Flush Nozzle	JSFN-M6	53313
	JSCAP-01	53325
Alignment Pin	JSOR-03	53328
	JSOR-01	53315
Upper 'O' Ring Seal	JSOR-07	53327
	JSOR-06	53330
	JSOR-04	53314
Lower 'O' Ring Seal	JSOR-07	53327
	JSOR-06	53330
	JSOR-04	53314
	JSOR-04-DN	53312

Index / Product Group

Inch Turning Toolholders

Jet-Stream™ Turning Toolholders			
Inch Description	Part No.	733101-	Page
ADCLNR/L-12-4B	53000	53001	14
ADCLNR/L-16-4D	53002	53003	14
ADCLNR/L-20-4D	53004	53005	14
ADCLNR/L-20-5D	53006	53007	14
ADCLNR/L-20-6D	53012	53013	14
ADCLNR/L-24-4E	53008	53009	14
ADCLNR/L-24-5E	53010	53011	14
ADCLNR/L-24-6E	53014	53015	14
ADDJNR/L-12-3B	53016	53017	14
ADDJNR/L-12-4B	53018	53019	14
ADDJNR/L-16-4D	53020	53021	14
ADDJNR/L-20-4D	53022	53023	14
ADDJNR/L-24-4E	53024	53025	14
ADDPNN-12-3B	53030		14
ADDPNN-12-4B	53031		14
ADDPNN-16-3D	53032		14
ADDPNN-16-4D	53033		14
ADDPNN-20-4D	53034		14
ADDPNN-24-4E	53035		14
ADSDNN-12-4B	53053		15
ADSDNN-16-4D	53054		15
ADSDNN-20-4D	53055		15
ADSDNN-20-5D	53056		15
ADSDNN-24-5E	53058		15
ADSRNR/L-12-4B	53040	53041	15
ADSRNR/L-16-4D	53043	53044	15
ADSRNR/L-20-5D	53045	53046	15
ADSRNR/L-24-5E	53047	53048	15
ADTENN-12-3B	53075		15
ADTENN-12-4B	53076		15
ADTENN-16-3D	53077		15
ADTENN-16-4D	53078		15
ADTENN-20-4D	53079		15
ADTENN-24-4E	53080		15
ADTJNR/L-12-3B	53063	53064	16
ADTJNR/L-12-4B	53065	53066	16
ADTJNR/L-16-3D	53067	53068	16
ADTJNR/L-16-4D	53069	53070	16
ADTJNR/L-20-4D	53071	53072	16
ADTJNR/L-24-4E	53073	53074	16
ADVJNR/L-12-3B	53081	53082	16
ADVJNR/L-16-3D	53083	53084	16
ADVJNR/L-20-3D	53085	53086	16
ADVJNR/L-24-3E	53087	53088	16
ADWLNRL-12-3B	53093	53094	16
ADWLNRL-12-4B	53095	53096	16
ADWLNRL-16-3D	53097	53098	16
ADWLNRL-16-4D	53099	53100	16
ADWLNRL-20-4D	53101	53102	16
ADWLNRL-24-4E	53103	53104	16

Inch Boring Bars

Jet-Stream™ Boring Bars			
Inch Description	Part No.	733101-	Page
AS-12R-ADCLNR/L-3	53120	53121	19
AS-16R-ADCLNR/L-4	53122	53123	19
AS-20S-ADCLNR/L-4	53124	53125	19
AS-24S-ADCLNR/L-4	53126	53127	19
AS-32T-ADCLNR/L-4	53128	53129	19
AS-32T-ADCLNR/L-5	53130	53131	19
AS-20S-ADDPNR/L-4	53150	53151	20
AS-24S-ADDPNR/L-4	53152	53153	20
AS-16R-ADDUNR/L-3	53137	53138	19
AS-20S-ADDUNR/L-4	53139	53140	19
AS-24S-ADDUNR/L-4	53141	53142	19
AS-32T-ADDUNR/L-4	53143	53144	19
AS-20S-ADSKNR/L-4	53159	53160	20
AS-24S-ADSKNR/L-4	53161	53162	20
AS-32T-ADSKNR/L-4	53163	53164	20
AS-32T-ADSKNR/L-5	53165	53166	20
AS-12R-ADTUNR/L-3	53172	53173	19
AS-16R-ADTUNR/L-3	53174	53175	19
AS-20S-ADTUNR/L-4	53176	53177	19
AS-24S-ADTUNR/L-4	53178	53179	19
AS-32T-ADTUNR/L-4	53180	53181	19
AS-20S-ADVUNR/L-3	53189	53190	20
AS-24S-ADVUNR/L-3	53191	53192	20
AS-12R-ADWLNRL-3	53198	53199	20
AS-16R-ADWLNRL-4	53200	53201	20
AS-20S-ADWLNRL-4	53202	53203	20
AS-24S-ADWLNRL-4	53204	53205	20
AS-32T-ADWLNRL-4	53206	53207	20

Inch Threading Toolholders & Bars

Jet-Stream™ DorNotch Threading			
Inch Description	Part No.	733101-	Page
ADNSR/L12-3B	53450	53451	29
ADNSR/L16-3D	53452	53453	29
ADNSR/L20-3D	53454	53455	29
ADNSR/L16-4D	53456	53457	29
ADNSR/L20-4D	53458	53459	29
ADNSR/L24-4E	53460	53461	29
ADNER/L12-3B	53465	53466	29
ADNER/L16-3D	53467	53468	29
ADNER/L20-3D	53469	53470	29
ADNER/L16-4D	53471	53472	29
ADNER/L20-4D	53473	53474	29
ADNRR/L12-3B	53480	53481	29
ADNRR/L16-3D	53482	53483	29
ADNRR/L20-3D	53484	53485	29
AS-16R-ADNER/L-3	53490	53491	30
AS-20S-ADNER/L-3	53492	53493	30
AS-24S-ADNER/L-3	53494	53495	30
AS-32T-ADNER/L-4	53496	53497	30

Inch Threading Toolholders & Bars

Jet-Stream™ Laydown Threading			
Inch Description	Part No.	733101-	Page
ADLER/L12-16C	53510	53511	32
ADLER/L16-16D	53512	53513	32
ADLEGR/L12-16C	53516	53517	32
ADL-EGR/L16-16D	53518	53519	32
ADLER/L12-16Q-C	53522	53523	32
ADLER/L16-16Q-D	53524	53525	32
ADLER/L20-16Q-D	53526	53527	32
ADLER/L16-22Q-D	53528	53529	32
ADLER/L24-22Q-E	53530	53531	32
AS-12R-ADLNR/L-16	53533	53534	33
AS-16R-ADLNR/L-16	53535	53536	33
AS-20S-ADLNR/L-16	53537	53538	33
AS-24S-ADLNR/L-16	53539	53540	33
AS-20S-ADLNR/L-22	53541	53542	33
AS-24S-ADLNR/L-22	53543	53544	33
AS-32T-ADLNR/L-22	53545	53546	33
ADLER/L16-T22API-D	53549	53550	33
ADLER/L20-T22API-D	53551	53552	33
ADLER/L24-T27API-F	53553	53554	33
ADLER/L32-T27API-H	53555	53556	33
AS-32T-ADLNR/L-22API	53559	53560	33
AS-40T-ADLNR/L-22API	53561	53562	33
AS-32T-ADLNR/L-27API	53563	53564	33
AS-40T-ADLNR/L-27API	53565	53566	33

Metric Turning Toolholders

Jet-Stream™ Turning Toolholders			
Metric Description	Part No.	733101-	Page
ADCLNR/L-2020-K12	52828	52829	34
ADCLNR/L-2525-M12	52830	52831	34
ADCLNR/L-3232-P12	52832	52833	34
ADCLNR/L-3232-P16	52834	52835	34
ADCLNR/L-3232-P19	52826	52827	34
ADCLNR/L-4040-S12	52836	52837	34
ADCLNR/L-4040-S16	52838	52839	34
ADCLNR/L-4040-S19	52840	52841	34
ADDJNR/L-2020-K11	52842	52843	34
ADDJNR/L-2020-K15	52844	52845	34
ADDJNR/L-2525-M15	52846	52847	34
ADDJNR/L-3232-P15	52848	52849	34
ADDJNR/L-4040-S15	52850	52851	34
ADDPNN-2020-K11	52854		34
ADDPNN-2020-K15	52855		34
ADDPNN-2525-M11	52856		34
ADDPNN-2525-M15	52857		34
ADDPNN-3232-P15	52858		34
ADDPNN-4040-S15	52859		34
ADSDNN-2525-M12	52872		35
ADSDNN-3232-P12	52873		35
ADSDNN-3232-P16	52874		35
ADSDNN-4040-S16	52875		35
ADSRNR/L-2020-K12	52862	52863	35
ADSRNR/L-2525-M12	52864	52865	35
ADSRNR/L-3232-P16	52866	52867	35
ADSRNR/L-4040-S16	52868	52869	35
ADTENN-2020-K16	52892		35
ADTENN-2020-K22	52893		35
ADTENN-2525-M16	52894		35
ADTENN-2525-M22	52895		35
ADTENN-3232-P22	52896		35
ADTENN-4040-S22	52897		35
ADTJNR/L-2020-K16	52878	52879	36
ADTJNR/L-2020-K22	52880	52881	36
ADTJNR/L-2525-M16	52882	52883	36
ADTJNR/L-2525-M22	52884	52885	36
ADTJNR/L-3232-P22	52886	52887	36
ADTJNR/L-4040-S22	52888	25889	36
ADVJNR/L-2020-K16	52900	52901	36
ADVJNR/L-2525-M16	52902	52903	36
ADVJNR/L-3232-P16	52904	52905	36
ADWLNR/L-2020-K06	52909	52910	36
ADWLNR-2020-K08	52911	52912	36
ADWLNR/L-2525-M06	52913	52914	36
ADWLNR/L-2525-M08	52915	52916	36
ADWLNR/L-3232-P08	52917	52918	36
ADWLNR/L-4040-S08	52919	52920	36

Metric Boring Bars

Jet-Stream™ Boring Bars			
Inch Description	Part No.	733101-	Page
AS-20R-ADCLNR/L-09	52925	52926	37
AS-25R-ADCLNR/L-12	52927	52928	37
AS-32S-ADCLNR/L-12	52929	52930	37
AS-40S-ADCLNR/L-12	52931	52932	37
AS-50T-ADCLNR/L-12	52933	52934	37
AS-50T-ADCLNR/L-16	52935	52936	37
AS-32S-ADDPNR/L-15	52939	52940	37
AS-40S-ADDPNR/L-15	52941	52942	37
AS-25R-ADDUNR/L-11	52946	52947	37
AS-32S-ADDUNR/L-15	52948	52949	37
AS-40S-ADDUNR/L-15	52950	52951	37
AS-50T-ADDUNR/L-15	52952	52953	37
AS-32S-ADSKNR/L-12	52958	52959	38
AS-40S-ADSKNR/L-12	52960	52961	38
AS-50T-ADSKNR/L-16	52962	52963	38
AS-20R-ADTUNR/L-16	52967	52968	38
AS-25R-ADTUNR/L-16	52969	52970	38
AS-32S-ADTUNR/L-22	52971	52972	38
AS-40S-ADTUNR/L-22	52973	52974	38
AS-50T-ADTUNR/L-22	52975	52976	38
AS-32R-ADVUNR/L-16	52980	52981	38
AS-40S-ADVUNR/L-16	52982	52983	38
AS-20R-ADWLNR/L-06	52986	52987	39
AS-25R-ADWLNR/L-08	52988	52989	39
AS-32S-ADWLNR/L-08	52990	52991	39
AS-40S-ADWLNR/L-08	52992	52993	39
AS-50T-ADWLNR/L-08	52994	52995	39

Threading Inserts

Threading Inserts			
Threading Method	Insert Grade	Insert Description	Page
OnEdge Negative Rake	DVK10 DVP656 DASK25B	TMNA_ TNMC_	44
OnEdge Positive Rake	TPMA_ TPMC_	TPMC_	44
Laydown 60° Partial External	DVK10 DASK25B	_ER _EL	44
Laydown 60° Partial Internal	_IR _IL	_IL	44
DorNotch Negative Rake V Thread NT 60°	DVK10 DVP656 DASK25B	NT_R NT_L	44
DorNotch Positive Rake V Thread NTP 60°	NTP_R NTP_L	NTP_L	44

ANSI & ISO Negative Turning Inserts

Negative Turning Inserts					
Material	Insert Grade	Insert Description	Chip Breaker	Page	
Free Cutting Steel, Low Carbon Steel, Alloy Carbon Steel, Tool Steel, Under 35HRC Ferretic Stainless Steel 400	CNMG_	PF	PM	PR	42
	DNMG_	PF	PM	PR	42
	SNMG_	PF	PM	PR	42
	TNMG_	PF	PM	PR	42
	VNMG_	PF	PM	PR	42
	WNMG_	PF	PM	PR	42
	CNGP_	FN	EN		43
	DNGP_	FN	EN		43
	VNGP_	FN	EN		43
	CNGP_	MP			43
Manganese, Uranium, Zirconium, Copper, Brass, Bronze, Lead Alloy, Tin Alloy, Tungsten Alloy, Nylon, Plastic, Rubber, Graphite, Phenolic	DNGP_	MP			43
	VNGP_	MP			43
	WNMP_	MP			43
	CNGP_	FN-XF			43
	DNGP_	FN-XF			43
	VNGP_	FN-XF			43

Metric Laydown Toolholders & Bars

Jet-Stream™ Laydown Threading			
Inch Description	Part No.	733101-	Page
ADLER/L2020-16K	53575	53576	39
ADLER/L2525-16M	53577	53578	39
ADLEGR/L2020-16K	53581	53582	39
ADLEGR/L2525-16M	53583	53584	39
AS-20R-ADLNR/L-16	53600	53601	40
AS-25R-ADLNR/L-16	53602	53603	40
AS-32S-ADLNR/L-16	53604	53605	40
AS-40S-ADLNR/L-16	53606	53607	40
AS-32S-ADLNR/L-22	53608	53609	40
AS-40S-ADLNR/L-22	53610	53611	40
AS-50T-ADLNR/L-22	53612	53613	40
ADLER/L2525-T22API-M	53614	53615	40
ADLER/L3232-T22API-M	53616	53617	40
ADLER/L4040-T27API-R	53618	53619	40
ADLER/L5050-T27API-S	53620	53621	40
ADLER/L2020-16Q-K	53587	53588	40
ADLER/L2525-16Q-M	53589	53590	40
ADLER/L3232-16Q-M	53591	53592	40
ADLER/L2525-22Q-M	53593	53594	40
ADLER/L3232-22Q-P	53595	53596	40
AS-50T-ADLNR/L-22API	53624	53625	41
AS-60T-ADLNR/L-22API	53626	53627	41
AS-50T-ADLNR/L-27API	53628	53629	41
AS-60T-ADLNR/L-27API	53630	53631	41

Hardware	Standard Coolant Connector Kits	41
	High Pressure Coolant Connector Kit	41
	Ball-Type Coolant Nozzles	41
Spare Parts	For Jet-Stream™ Turning & Boring	45
	For Jet-Stream™ Threading	45

FAX CATALOG REQUEST FORM TO 979-282-2951

ALL DORIAN TOOL CATALOGS ARE AVAILABLE ONLINE. To access catalogs on our website visit us at www.doriantool.com

Any catalog that is not currently printed in mass quantity will be printed in house as black and white and sent to you in limited quantities.

Contact Name:	e-mail address:		
Company Name:	Phone Number:		
Mailing Address:			
Catalog	Quantity	Catalog	Quantity
Tool Guide for Everyday Machining Vol.No 3 Our most current Volume will be sent to you. Products offered per volume may vary depending on demand and featured items. Inside this Tool Guide You will find High Performance cutting tools, inserts and machine tool accessories for every day machining. Additionally this catalog will give you an excellent overview of our complete line of tooling.		NEW 2011 Jet-Stream Thru Coolant System Vol.No 3 Dorian Tool's Jet-Stream™ Thru Coolant Cutting Tools use patented thru-coolant locking clamp which is precisely aimed to direct high pressure, high velocity coolant exactly onto the cutting edge of the carbide insert, from a short distance of $\frac{1}{4}$ "(6mm). This catalog offers a vast range Jet-Stream™ Thru Coolant Cutting Tools for Turning, Boring and Threading applications.	
NEW 2011 Turning & Boring Cutting Tools & Inserts Dorian Tool offers a complete selection of indexable cutting tools. Our wide variety of Turning, Boring tools and inserts provide solutions for all your Turning, Facing, Boring, Chamfering, I.D. & O.D. Profiling, Chuck Work and Between Center Work Machining Operations. <i>For Milling, Cut-off and Drilling Indexable Tools see our 2003 Indexable catalog online.</i>		NEW 2011 Threading, Grooving & API Cutting Tools & Inserts Dorian Tool offers a complete selection of indexable cutting tools. Our wide variety of Turning, Boring, threading tools and inserts provide solutions for all your Turning, Facing, Boring, Chamfering, I.D. & O.D. Profiling, Chuck Work and Between Center Work Machining Operations.	
2008 CNC Adjustable Angle Heads Choose from two styles (Universal and 90°) and six models for any milling, drilling, tapping and face milling operations. The Universal CNC Adjustable Angle Heads have two positioning axes and are offered in ER25 and ER32 collet toolholding systems. The use of the Universal CNC Adjustable Angle Heads increases productivity and quality by eliminating secondary operations and the need for more expensive 4th & 5th axis rotary tables. The 90° CNC Adjustable Angle Heads have one positioning axis and are offered in ER16, ER25 and ER32 collet toolholding systems as well as CAT/ISO/BT 40 taper toolholding system.		2007 knurling Tools & Wheels Dorian Tool offers a wide range of knurling tools to cover most knurling applications. Since the introduction of Dorian's modular knurling tool system, knurling has never been easier. The knurl tools range from cutting to forming a knurling pattern. The cutting style knurl tools have revolutionized knurling. It is faster and requires less pressure to create a knurl over forming. A wide range of knurl wheel pitches are also available.	
2006 Perfetta Live Centers & Bull Nose These live centers, which have already been recognized throughout the rest of the industrial world as the most precise live centers ever built, are now available to the American machine tool industry. Designed for turning on a CNC lathe or for use on a CNC grinding machine, the Perfetta™ Live Center has over 50 years of proven workmanship. Where speed, precision and dependability are the requirements, these tools guarantee quality and performance.		NEW Lathe Accessories Catalog With a full line of Victory Automatic Thru Coolant, Super Quick Change and Quadra™ Indexing Quick Change tool posts and holders as well as manual, electro-pneumatic, and electro-mechanical turrets, Dorian Tool has all that is needed to improve efficiency on both manual and CNC lathes. In addition, the Dorian Tru-Jaws system makes for easy remachining of soft jaws. This catalog replaces all three Dorian Tool post catalogs as well as the 2005 MTA (Machine Tool Accessories) catalog.	
Swiss Screw Machine Tools and Advanced Technology Catalog Featuring Jet-Stream™ Thru Coolant System for Turning, Threading and Cut-off Toolholders. Designed for Swiss Screw Machines. This catalog will be available in a U.S.A. and European Version.	COMING SOON in 2011/2012	Indexable Turning Grooving And Parting-Off Toolholders Catalog For CNC and Manual Lathes Featuring Jet-Stream™ Thru Coolant System, multi-application tools, modular face grooving system, and high performance inserts.	COMING SOON in 2011/2012

Sales Policy

Conditions of Sale: All sales are made in accordance with our standard conditions of sale, current at the time orders are accepted. Specifications and prices are subject to change without notice.

Terms of Payment: Standard payment terms for all products is (1% 10 Net 30 days) upon credit approval. Dorian reserves the right to hold shipments or to ship on a C.O.D. basis, any orders received from any purchaser whose account is delinquent. Invoices not paid timely are subject to 1.5% interest per month, not to exceed 18%. However, purchasers who default on terms agreed upon, Dorian reserves the right to add collection and/or attorney fees to the total amount of the invoice or total amount of all invoices. No order will be processed if any invoices are over 45 days old. All taxes, duties, or other expenses arising out of, or in connection with the sale of product shall be the sole liability of purchaser.

No Minimum Order: There will be a \$5.00 handling fee for orders drop shipped with a value under \$50.00 net.

Delivery Terms: F.O.B. East Bernard, Texas. All shipments are made by regular UPS, Parcel Post, or truck. Full transportation costs will be charged to the buyer. Specify shipment to be made by other than regular means of transportation.

Defective Product Claim: If within 30 days from shipping date, customer claims that product is defective and requires an immediate replacement, a distributor can issue a purchase order for a new product and return the defective product to Dorian for inspection. Upon inspection, if the product is found to be defective a credit will be issued for the replacement. If the product is not found to be defective, an invoice will be issued for the replacement. Freight to and from Dorian will be at the customer's expense.

Claims: Any claim discrepancies in shipments are to be made within 7 days of receipt of merchandise. Any in transit claim for damaged and lost goods must be made against the transportation company only. The foregoing shall constitute the sole and exclusive remedies of the customer and are in lieu of all other warranties, expressed, implied, or statutory, including but not limited to any implied warranty of merchantability or fitness.

Satisfaction Guaranteed: If you are not fully satisfied with a Dorian product, simply return it within 30 days of shipping date and you will receive full CREDIT if the merchandise is received in resalable condition.

Product Limited Warranty: Dorian extends to the purchaser for resale, use in their own business, or original equipment manufacturing, a limited warranty, that products made by DORIAN will be free from any defects in material and workmanship for one year after the date of purchase when used under normal intended applications. No other guarantee is made by this policy, nor does it apply to any product which has been altered, misused, or used in applications other than its normal intended use. Request for a Return Goods Authorization (RGA) number from Dorian and return freight pre-paid to Dorian any part or product which is determined by Dorian to be defective in material or workmanship will be repaired or replaced at Dorian's option.

Special Product Quotations: All special product quotations are valid for thirty days from the date of quotation unless otherwise specified. Orders for special products must be confirmed in writing before manufacturing can begin, along with payment for 50% of the quoted price, with the remaining 50% to be paid upon delivery of the special products. Special products and non-stock standard products cannot be canceled or returned for exchange or credit.

Cancellations: Customer may not cancel or modify any purchase order once a purchase order has been expressly accepted by Dorian, unless (a) customer has given Dorian reasonable notice to stop work, (b) customer pays for all work-in-progress and any raw materials or supplies used or consumed by Dorian in connection with the order, at the time work is stopped (or for which commitments have been made by Dorian at such time) in connection with the order (c) customer pays all costs and expenses otherwise incurred by Dorian in connection with the order, and (d) customer pays a cancellation charge of fifteen percent (15%) of the initial quoted price.

Returns: Return undamaged product within 30 days of the ship date, if the merchandise is received in resalable condition you will receive full CREDIT on your account.- Product(s) returned after 30 days but prior to 90 days after the ship date is subject to a 20% restocking fee.- Unless otherwise specified, no material will be accepted for returned after 90 days of the ship date.- If the Distributor or End User, within 30 days of the ship date, claims a product is defective and needs immediate replacement, the customer must place a new order, and a RMA number will be issued for the defective product. The Distributor will be advised upon completion of inspection if credit will be issued.- Any product returned for repair, under warranty or warranty expired, will not be accepted without a RMA number.- Customer will be advised of any charges before repairs are made.- All returns must be authorized by Dorian Tool with a official RMA number.- Dorian Tool does not constitute acceptance of the product when a RMA number is issued.- The RMA number must be visible on the outside of the box and a copy of the RMA form must be placed inside the original box along with the returned product.- Any package received without an official RMA number visible on the outside of the box will be refused and returned to the sender at their expense.- The customer is responsible for the freight to and from Dorian Tool.- NO PRODUCT WILL BE ACCEPTED FOR RETURN WHEN RECEIVED IN NON-RESALABLE CONDITION. This includes, but is not limited to: damaged packages, non Dorian labels and marking, missing parts, cosmetic damages, used and/or obsolete product(s).- Quality Control must inspect and accept product before credit will be issued.- RMAs are processed daily by RMA Service Center at X 260.- RMA numbers are valid for 30 days from the date is issued. All product(s) requested for return must be received by Dorian Tool within 30 days of the RMA date.- In the event the RMA is denied, the customer has 30 days from the date of notification to respond with shipping instructions for their product. If shipping instructions are not provided by the customer within 30 days from the RMA denial notification, the product will be disposed at the customers expense.- By writing the RMA number on the outside of the box and shipping product to Dorian against this number constitutes acceptance of Dorian's terms and conditions.

Condition, terms and specifications are subject to change without notice.
Any typographical error in any printing matter is subject to correction.



Fontana Liri Italy

U.S.A., Corporate Headquarters and Manufacturing Plant

Dorian Tool International, Inc.

615 County Rd 219 East Bernard, TX 77435 U.S.A.

Phone: 979-282-2861 Fax: 979-282-2951

E-Mail: Sales@doriantool.com

Visit: www.doriantool.com



The First Choice
TECHNOLOGY

México, Grupo Mecausa de Maquinas y Herramientas S. A. de C.V.

Col. San Javier, Guerrero No.58 Tlalnepantla, Estado de Mexico C.P.54030

Telf.: 55 5362 3257, Telf.: 55 5362 8245, Movil.: 55 5366 0533

Fax.: 55 5362 2262

E-Mail: Sales@mecausa.com

MADE IN U.S.A.

Germany, Am Scheessberg 23 53343 Wachtberg Germany

Tel +49(0)2225 704381 Fax+49(0)02225 704382

Mobil +49(0)1796739098DE 1207143913

E-Mail: pheumueller@doriantool.com

Canada, Minicut International, Inc.

11100 L-H Lafontaine Blvd., Montreal, QC H1J 2Y5, Canada

Phone 514-352-6464 or 800-800-2011

Fax 514-352-6644

Email: International@minicut.com

Italy, International Minicut Italia s.r.l.

Via Abigale Zanetta 59 00143 Roma Italy

Tel: 011 39 06 519 63476 Fax: 011 39 06 519 63350

Mobil: 011 39 337 78 2009

E-Mail: int.minicutitalia@minicut.com



MPR08 MV 2011JSTREAM

The absence of a product, service, name or logo from this list does not constitute a waiver of Dorian Tools' trademark or other intellectual property rights concerning the name or logo. No part of this work covered by the copyright hereon may be reproduced or used in any form or by any means - graphic, electronic or mechanical; including photo-copying, recording, taping or information storage and retrieval systems- without written permission of the publisher.

Copyright ® 2011 by Dorian Tool International, East Bernard, Texas. All rights reserved.